SAMSUNG

PROJECTION TV RECEIVER

Chassis : P54A(REV. 1)

Model: PCL545RX/XAA PCL5415RX/XAA
PCL5415R3C/XAA PCL6215R3C/XAA
HCL552WX/XAA HCL5515WX/XAA
HCL652WX/XAA HCL6515WX/XAA

SERVICE Manual

PROJECTION TV RECEIVER

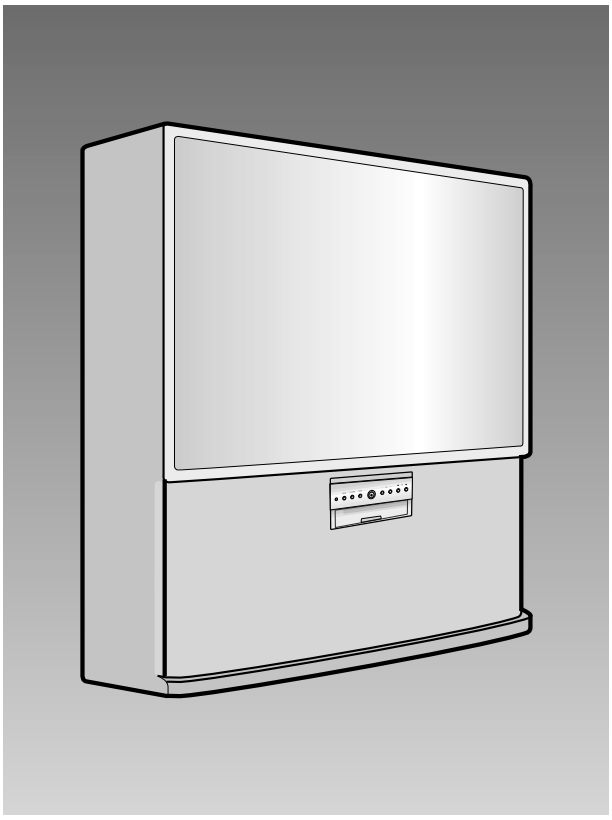

CONTENTS

1. Precautions
2. Reference Information
3. Specifications
4. Alignment and Adjustments
5. Troubleshooting
6. Exploded View and Parts List
7. Electric Parts List
8. Block Diagrams
9. Wiring Diagram
10. Schematic Diagrams

ELECTRONICS

© Samsung Electronics Co., Ltd. **MAY. 2001**
Printed in Korea
3P54A(N)-5405

1. Precautions

Follow these safety, servicing and ESD precautions to prevent damage and protect against potential hazards such as electrical shock and X-rays.

1-1 Safety Precautions

1. Be sure that all of the built-in protective devices are replaced. Restore any missing protective shields.

2. When reinstalling the chassis and its assemblies, be sure to restore all protective devices, including: nonmetallic control knobs and compartment covers.

3. Make sure that there are no cabinet openings through which people—particularly children—might insert fingers and contact dangerous voltages. Such openings include the spacing between the picture tube and the cabinet mask, excessively wide cabinet ventilation slots, and improperly fitted back covers.

   If the measured resistance is less than 1.0 megohm or greater than 5.2 megohms, an abnormality exists that must be corrected before the unit is returned to the customer.

4. Leakage Current Hot Check (Figure 1-1):
   Warning: Do not use an isolation transformer during this test. Use a leakage-current tester or a metering system that complies with American National Standards Institute (ANIS C101.1, Leakage Current for Appliances), and Underwriters Laboratories (UL Publication UL1410, 59.7).

5. With the unit completely reassembled, plug the AC line cord directly into the power outlet. With the unit's AC switch first in the ON position and then OFF, measure the current between a known earth ground (metal water pipe, conduit, etc.) and all exposed metal parts, including: antennas, handle brackets, metal cabinets, screwheads and control shafts. The current measured should not exceed 0.5 milliamp. Reverse the power-plug prongs in the AC outlet and repeat the test.

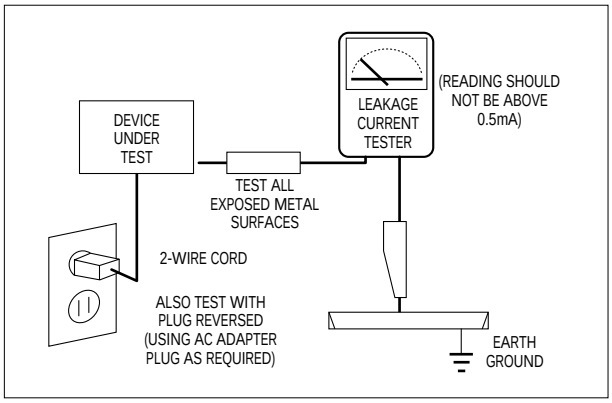
LEAKAGE CURRENT TESTER
(READING SHOULD NOT BE ABOVE 0.5mA)
DEVICE UNDER TEST
TEST ALL EXPOSED METAL SURFACES
2-WIRE CORD
ALSO TEST WITH PLUG REVERSED (USING AC ADAPTER PLUG AS REQUIRED)
EARTH GROUND

Fig. 1-1 AC Leakage Test

6. Antenna Cold Check:
   With the unit's AC plug disconnected from the AC source, connect an electrical jumper across the two AC prongs. Connect one lead of the ohmmeter to an AC prong. Connect the other lead to the coaxial connector.

7. X-ray Limits:
   The picture tube is especially designed to prohibit X-ray emissions. To ensure continued X-ray protection, replace the picture tube only with one that is the same type as the original. Carefully reinstall the picture tube shields and mounting hardware; these also provide X-ray protection.

8. High Voltage Limits:
   High voltage must be measured each time servicing is done on the B+, horizontal deflection or high voltage circuits. Correct operation of the X-ray protection circuits must be reconfirmed whenever they are serviced. (X-ray protection circuits also may be called "horizontal disable" or "hold-down".)

   Heed the high voltage limits. These include the X–ray Protection Specifications Label, and the Product Safety and X-ray Warning Note on the service data schematic.

1-1 Safety Precautions (Continued)

9. High voltage is maintained within specified limits by close-tolerance, safety-related components and adjustments. If the high voltage exceeds the specified limits, check each of the special components.

10. Design Alteration Warning:
    Never alter or add to the mechanical or electrical design of this unit. Example: Do not add auxiliary audio or video connectors. Such alterations might create a safety hazard. Also, any design changes or additions will void the manufacturer's warranty.

11. Hot Chassis Warning:
    Some TV receiver chassis are electrically connected directly to one conductor of the AC power cord. If an isolation transformer is not used, these units may be safely serviced only if the AC power plug is inserted so that the chassis is connected to the ground side of the AC source.

    To confirm that the AC power plug is inserted correctly, do the following: Using an AC voltmeter, measure the voltage between the chassis and a known earth ground. If the reading is greater than 1.0V, remove the AC power plug, reverse its polarity and reinsert. Re-measure the voltage between the chassis and ground.

12. Some TV chassis are designed to operate with 85 volts AC between chassis and ground, regardless of the AC plug polarity. These units can be safely serviced only if an isolation transformer inserted between the receiver and the power source.

13. Some TV chassis have a secondary ground system in addition to the main chassis ground. This secondary ground system is not isolated from the AC power line. The two ground systems are electrically separated by insulating material that must not be defeated or altered.

14. Components, parts and wiring that appear to have overheated or that are otherwise damaged should be replaced with parts that meet the original specifications. Always determine the cause of damage or overheating, and correct any potential hazards.

15. Observe the original lead dress, especially near the following areas: Antenna wiring, sharp edges, and especially the AC and high voltage power supplies. Always inspect for pinched, out-of-place, or frayed wiring. Do not change the spacing between components and the printed circuit board. Check the AC power cord for damage. Make sure that leads and components do not touch thermally hot parts.

16. Picture Tube Implosion Warning:
    The picture tube in this receiver employs "integral implosion" protection. To ensure continued implosion protection, make sure that the replacement picture tube is the same as the original.

17. Do not remove, install or handle the picture tube without first putting on shatterproof goggles equipped with side shields. Never handle the picture tube by its neck. Some "in-line" picture tubes are equipped with a permanently attached deflection yoke; do not try to remove such "permanently attached" yokes from the picture tube.

18. Product Safety Notice:
    Some electrical and mechanical parts have special safety-related characteristics which might not be obvious from visual inspection. These safety features and the protection they give might be lost if the replacement component differs from the original—even if the replacement is rated for higher voltage, wattage, etc.

    Components that are critical for safety are indicated in the circuit diagram by shading, (⚡) or (⚠).
    Use replacement components that have the same ratings, especially for flame resistance and dielectric strength specifications.
    A replacement part that does not have the same safety characteristics as the original might create shock, fire or other hazards.

1-2 Servicing Precautions

Warning 1 : First read the "Safety Precautions" section of this manual. If some unforeseen circumstance creates a conflict between the servicing and safety precautions, always follow the safety precautions.
Warning 2 : An electrolytic capacitor installed with the wrong polarity might explode.

1. Servicing precautions are printed on the cabinet. Follow them.

2. Always unplug the unit's AC power cord from the AC power source before attempting to: (a) Remove or reinstall any component or assembly, (b) Disconnect an electrical plug or connector, (c) Connect a test component in parallel with an electrolytic capacitor.

3. Some components are raised above the printed circuit board for safety. An insulation tube or tape is sometimes used. The internal wiring is sometimes clamped to prevent contact with thermally hot components. Reinstall all such elements to their original position.

4. After servicing, always check that the screws, components and wiring have been correctly reinstalled. Make sure that the portion around the serviced part has not been damaged.

5. Check the insulation between the blades of the AC plug and accessible conductive parts (examples: metal panels, input terminals and earphone jacks).

"CAUTION : Double-pole/neutral fusing"

6. Insulation Checking Procedure: Disconnect the power cord from the AC source and turn the power switch ON. Connect an insulation resistance meter (500V) to the blades of the AC plug.

   The insulation resistance between each blade of the AC plug and accessible conductive parts (see above) should be greater than 1 megohm.

7. Never defeat any of the B+ voltage interlocks. Do not apply AC power to the unit (or any of its assemblies) unless all solid-state heat sinks are correctly installed.

8. Always connect a test instrument's ground lead to the instrument chassis ground before connecting the positive lead; always remove the instrument's ground lead last.

9. When some parts inside the optical engine (except lamp) are damaged, replace the whole optical engine.

1-3 Precautions for Electrostatically Sensitive Devices (ESDs)

1. Some semiconductor (“solid state”) devices are easily damaged by static electricity. Such components are called Electrostatically Sensitive Devices (ESDs); examples include integrated circuits and some field-effect transistors. The following techniques will reduce the occurrence of component damage caused by static electricity.

2. Immediately before handling any semicon ductor components or assemblies, drain the electrostatic charge from your body by touching a known earth ground. Alternatively, wear a discharging wrist-strap device. (Be sure to remove it prior to applying power—this is an electric shock precaution.)

3. After removing an ESD-equipped assembly, place it on a conductive surface such as aluminum foil to prevent accumulation of electrostatic charge.

4. Do not use freon-propelled chemicals. These can generate electrical charges that damage ESDs.

5. Use only a grounded-tip soldering iron when soldering or unsoldering ESDs.

6. Use only an anti-static solder removal device. Many solder removal devices are not rated as “anti-static”; these can accumulate sufficient electrical charge to damage ESDs.

7. Do not remove a replacement ESD from its protective package until you are ready to install it. Most replacement ESDs are packaged with leads that are electrically shorted together by conductive foam, aluminum foil or other conductive materials.

8. Immediately before removing the protective material from the leads of a replacement ESD, touch the protective material to the chassis or circuit assembly into which the device will be installed.

9. Minimize body motions when handling unpackaged replacement ESDs. Motions such as brushing clothes together, or lifting a foot from a carpeted floor can generate enough static electricity to damage an ESD.

2. Reference Information

2-1 Tables of Abbreviations and Acronyms

Table 2-1 Abbreviations

A	Ampere	MV	Megavolt
Ah	Ampere-hour	MW	Megawatt
Å	Angstrom	MΩ	Megohm
dB	Decibel	m	Meter
dBm	Decibel Referenced to One Milliwatt	µA	Microampere
		µF	Microfarad
°C	Degree Celsius	µH	Microhenry
°F	Degree Fahrenheit	µm	Micrometer
°K	degree Kelvin	µs	Microsecond
F	Farad	µW	Microwatt
G	Gauss	mA	Milliampere
GHz	Gigahertz	mg	Milligram
g	Gram	mH	Millihenry
H	Henry	ml	Milliliter
Hz	Hertz	mm	Millimeter
h	Hour	ms	Millisecond
ips	Inches Per Second	mV	Millivolt
kWh	Kilowatt-hour	nF	Nanofarad
kg	Kilogram	Ω	Ohm
kHz	Kilohertz	pF	Picofarad
kΩ	Kilohm	lb	Pound
km	Kilometer	rpm	Revolutions Per Minute
km/h	Kilometer Per Hour	rps	Revolutions Per Second
kV	Kilovolt	s	Second (Time)
kVA	Kilovolt-ampere	V	Volt
kW	Kilowatt	VA	Volt-ampere
l	Liter	W	Watt
MHz	Megahertz	Wh	Watt-hour

Table 2-2 Table of Acronyms

ABL	Automatic Brightness Limiter	I/O	Input/output
AC	Alternating Current	L	Left
ACC	Automatic Chroma Control	L	Low
AF	Audio Frequency	LED	Light Emitting Diode
AFC	Automatic Frequency Control	LF	Low Frequency
AFT	Automatic Fine Tuning	MOSFET	Metal-Oxide-Semiconductor-Field-Effect-Tr
AGC	Automatic Gain Control	MTS	Multi-channel Television Sound
AM	Amplitude Modulation	NAB	National Association of Broadcasters
ANSI	American National Standards Institute	NEC	National Electric Code
APC	Automatic Phase Control	NTSC	National Television Systems Committee
APC	Automatic Picture Control	OSD	On Screen Display
A/V	Audio-Video	PCB	Printed Circuit Board
AVC	Automatic Volume Control	PLL	Phase-Locked Loop
BAL	Balance	PWM	Pulse Width Modulation
BPF	Bandpass Filter	QIF	Quadrature Intermediate Frequency
B-Y	Blue-Y	R	Right
CATV	Community Antenna Television (Cable TV)	RC	Resistor & Capacitor
CB	Citizens Band	RF	Radio Frequency
CCD	Charge Coupled Device	R-Y	Red-Y
CCTV	Closed Circuit Television	SAP	Second Audio Program
Ch	Channel	SAW	Surface Acoustic Wave(Filter)
CRT	Cathode Ray Tube	SIF	Sound Intermediate Frequency
CW	Continuous Wave	SMPS	Switching Mode Power Supply
DC	Direct Current	S/N	Signal/Noise
DVM	Digital Volt Meter	SW	Switch
EIA	Electronics Industries Association	TP	Test Point
ESD	Electrostatic Discharge	TTL	Transistor Transistor Logic
ESD	Electrostatically Sensitive Device	TV	Television
FBP	Feedback Pulse	UHF	Ultra High Frequency
FBT	Flyback Transformer	UL	Underwriters Laboratories
FF	Flip-Flop	UV	Ultraviolet
FM	Frequency Modulation	VCD	Variable-Capacitance Diode
FS	Fail Safe	VCO	Voltage Controlled Oscillator
GND	Ground	VCXO	Voltage Controlled Crystal Oscillator
G-Y	Green-Y	VHF	Very High Frequency
H	High	VIF	Video Intermediate Frequency
HF	High-Frequency	VR	Variable Resistor
HI-FI	High Fidelity	VTR	Video Tape Recorder
IC	Inductance-Capacitance	VTVM	Vacuum Tube Voltmeter
IC	Integrated Circuit	TR	Transistor
IF	Intermediate Frequency		

2-2 IC Line Up

2-2-1 Progressive

Table 2 - 3 IC Line - Up			
No.	Block Name	IC Location	IC Name
1	MAIN	IC655	TDA7265
2	SUB	ICS801	TNY253P
		IC301	LA7845
		IC471	TL494CN
		ICZ103,104	STK392-040
		IC431	MC4558C
3	A/V-Terminal	IC703	PCF8574P
		ICP706	PCF8574P(Option)
		IC701,702	TDA6920X
		IC705	TC4052BP
		ICD02	MC14528B
		ICD01,03	EL4583C
4	Micom	IC901	Z9037116PSC
		IC902	24C16
5	Caption	ICC01	Z86129
		ICC02,03	NJM2248D
6	Double Window(D/W)	IC06	SDA9361
		IC07	CXA2101AQ
		IC01	VPC3230D-B2
		IC02	SDP9400
		IC03	SDS9280
		PIC01	VPC3230D-B2
		PIC02	MS81V04160
*6-1	PIP	*ICP701	SDA9488X
		*IC04	CIP3250A
7	3D-Comb	IC01	UPD64082GF
		IC02	416C1204

Table 2 - 3 IC Line - Up (Continued)			
No.	Block Name	IC Location	IC Name
8	Convergence	IC111,112	CD40668BCM
		IC109,110	74HC4066
		IC102	74HC4046
		IC106,107,108	TL072
		IC105	EL2210CS
		IC103	TSC87251G2D
		IC101	SDC91
		IC104	AT82C64
9	Sound	ICD601	MSP3452G-A1
		*ICD601	MSP3450G-B6
		ICD602,603	TL062
10	CRT	IC501,531,561	TDA6111Q
11	POWER	IC801S	STRF6656
		IC802	SVD001(OPTION)
		IC804	SE11ON

2-3 MICOM IIC BUS LINE -UP

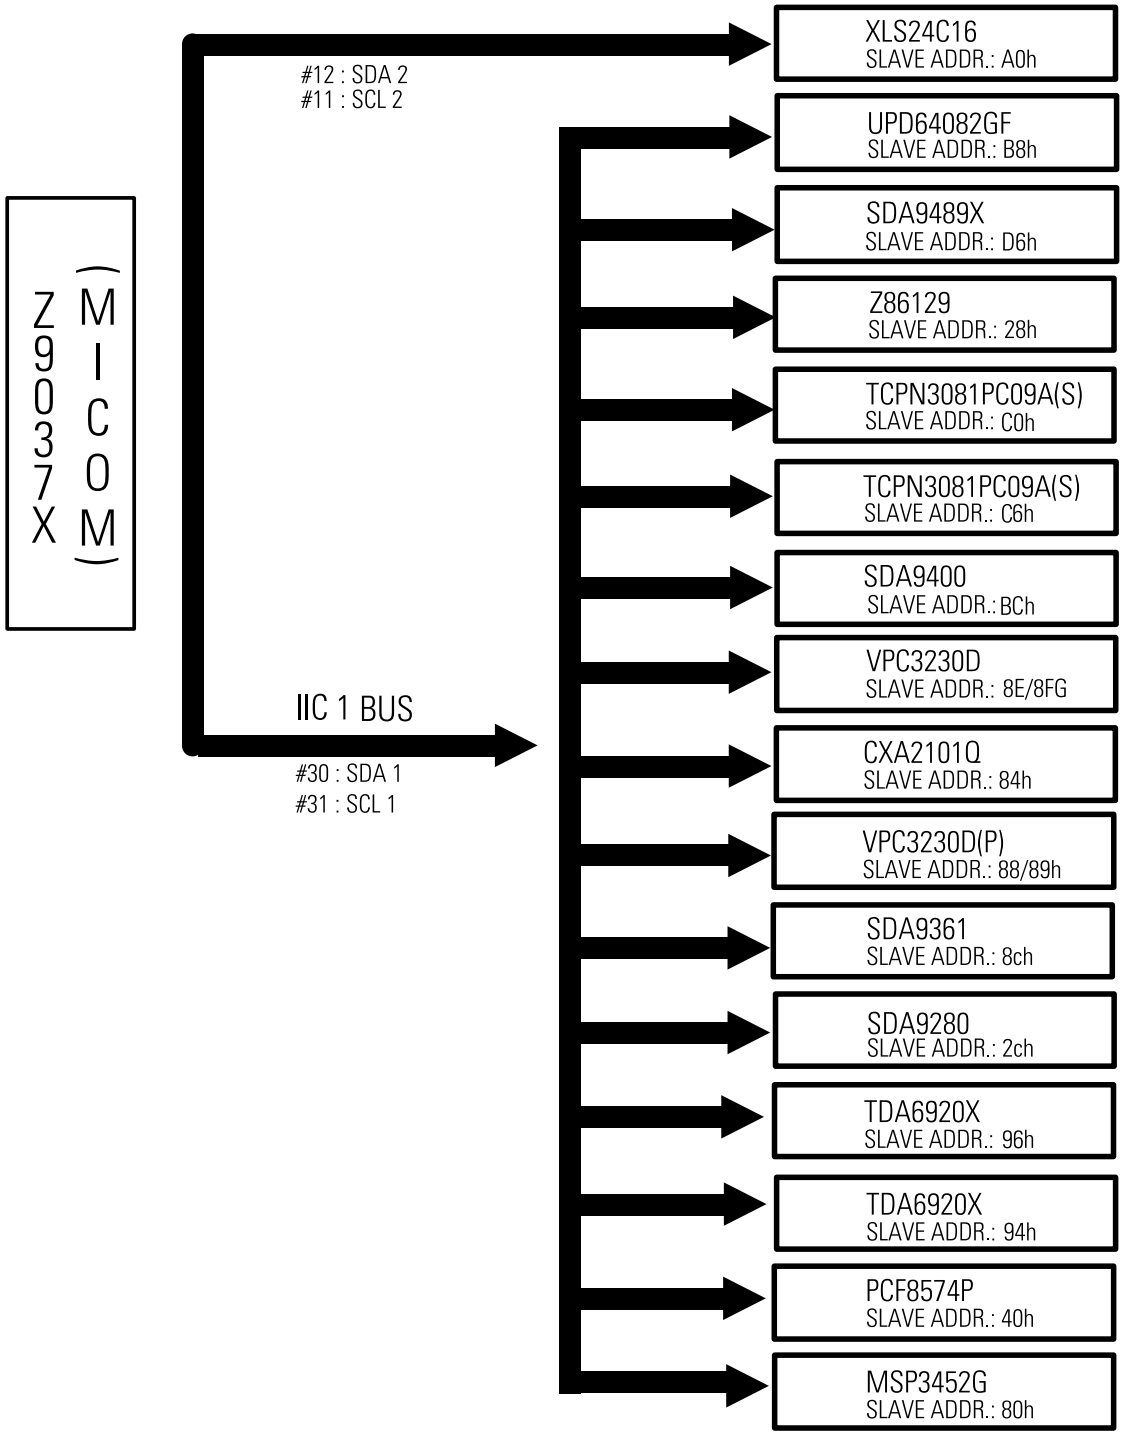

MENO

3. Specifications

Broadcasting System	NTSC
Scanning System	Progressive Scanning
Tuning Range	VHF : CH2 ~ CH13 UHF : CH14 ~ CH69 Cable : CH1, CH14 ~ 125
Antenna Impedance	75 ohm Unbalanced
Intermediate Frequency	Video : 45.75 MHz Sound : 42.25 MHz Chrominance Subcarrier : 42.17 MHz
Sound Output	STD : 10W FULL MAX : 15W
Rated Voltage	120V / 60 Hz
W/B Coordinates	Hx : 290 Hy : 278 Y : 8.0 Lx : 290 Ly : 278 Y : 0.2
High Voltage	29KV
FUSE	250V/6.3A CODE NO : 3601-000300
Power Consumption	230W

MENO

4. Alignment and Adjustments

4-1 When entering the service mode:

1. Turn on the TV, and then select “STANDARD”on the picture adjustment mode.
2. Turn off the TV (STAND-BY).
3. Enter the service mode by pressing the remote control keys in the following sequence :
   MUTE 1→8→2→Power On

Note : If necessary, re-do steps 1~3.

Initial display when the service mode is switched.

1. When a RF signal is received

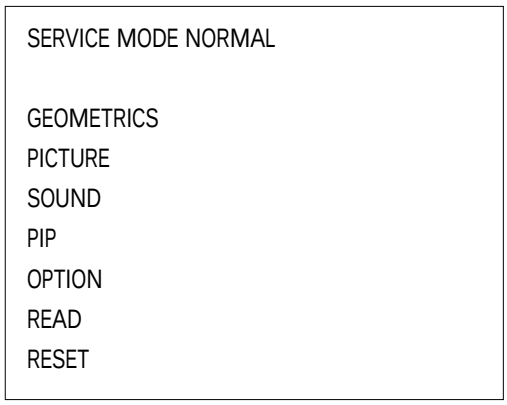

2. When a DTV signal is received

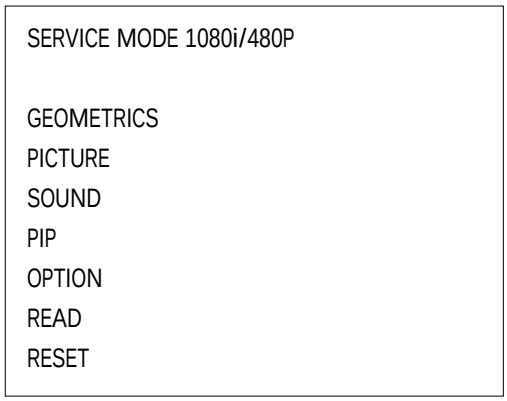

3. Service Mode Control Keys

MAIN MENU	MENU DISPLAY
CH UP/DOWN	Select item by moving cursor
VOL UP/DOWN	Decrease or increase the adjustment values

4-2 Factory Data

4-2-1 NORMAL

GEOMETRIC

Item	FUNCTION	RANGE	INITIAL DATA	Performance of adjustment	EEP-ROM COPY DATA			
					54"	62"	55"	65"
VS	V-Shift	0~255	110	Variable	100	100	100	100
VA	V-Size	0~255	120	Variable	120	120	120	120
VL	V-Line	0~255	120	x	120	120	120	120
VSC	V-S-CORR	0~255	128	x	128	128	128	128
VE	V-EHT	0~255	0	x	0	0	0	0
HA	H-Size	0~255	84	Variable	80	80	80	80
PPH	PIN-PHS	0~255	128	x	128	128	128	128
PAM	PIN-AMP	0~255	70	x	70	70	70	70
UPC	UP-CORR	0~255	128	x	128	128	128	128
LOC	LO-CORR	0~255	128	x	128	128	128	128
HEH	H-EHT	0~255	0	x	0	0	0	0
HS	H-Shift	0~127	90	Fix	90	90	90	90
VAN	V-Angle	0~255	128	x	128	128	128	128
VBO	V-Bow	0~255	128	x	128	128	128	128
HSP	H-Sync-PH	0~255	138	x	138	138	138	138
OFS	Offset	0~1	0	x	0	0	0	0
VSO	VS-Offset	0~125	57	Variable	57	85	0	0
VAO	VA-Offset	0~125	70	Variable	70	95	60	60
VLO	VL-Offset	0~125	0	Variable	0	0	0	0
Set after changing the option for 1080i-mode factory-scan (OFS 0->1) *Only DTV 1080i Mode								

PICTURE

Item	FUNCTION	RANGE	INITIAL DATA	Performance of adjustment	EEP-ROM COPY DATA			
					54”	62”	55”	65”
RDR	R-Drive	0~63	20	Variable	38	38	38	38
GDR	G-Drive	0~63	20	(Fix)	32	32	32	32
BDR	B-Drive	0~63	20	Variable	22	22	22	22
RCT	R-Cut Off	0~63	31	Variable	8	8	8	8
GCT	G-Cut Off	0~63	31	Variable	20	20	20	20
BCT	B-Cut Off	0~63	31	Variable	5	5	5	5
SBT	Sub-BRT	0~63	15	Variable	28	28	28	28
CON	Sub-CONT	0~15	7	Variable	5	5	5	5
COL	Sub-Color	0~15	10	X	10/10/10	10/10/10	10/10/10	10/10/10
HUE	Sub-Tint	0~15	5	X	5	5	5	5
RYR	R-Y AXIS	0~15	2	X	2	2	2	2
RYB	R-Y AXIS	0~15	13	X	10	10	10	10
GYR	R-Y AXIS	0~15	12	X	10	10	10	10
GYB	R-Y AXIS	0~15	9	X	5	5	5	5
GAM	Gamma	0~15	10	X	12	12	12	12
SHP	Sub-Sharp	0~3	3	x	3	3	3	3
SFO	SHP-FO	0~3	2	x	2/2/3	2/2/3	2/2/3	2/2/3
POV	PRE-OVER	0~3	3	x	3/1/0	3/1/0	3/1/0	3/1/0
LTI	LUMINANCE	0~3	1	x	1	1	1	1
VML	VM-LBL	0~3	2	x	2/2/2	2/2/2	2/2/2	2/2/2
VMD	VM-PHASE	0~3	0	x	0/0/0	0/0/0	0/0/0	0/0/0
DCT	DC-TRAN	0~3	2	x	2/3/2	2/3/2	2/3/2	2/3/2
DPI	D-PIC	0~3	2	x	2/2/2	2/2/2	2/2/2	2/2/2
HPF	HPF/BCOF	0~15	6	x	6	6	6	6
VPF	VPF/HCOF	0~15	6	x	6	6	6	6
VPG	VAPGAIN	0~7	4	x	4	4	4	4
VPI	VAPINV	0~31	20	x	20	20	20	20

PICTURE

Item	FUNCTION	RANGE	INITIAL DATA	Performance of adjustment	EEP-ROM COPY DATA			
					54”	62”	55”	65”
RCO		0~100	100	X	100	100	100	100
GCO		0~100	100	X	100	65	100	100
BCO		0~100	20	X	20	20	20	20
BPO		0~255	160	X	160	160	160	160
BWD		0~255	61	X	61	61	61	61

4-2-2 D/TV 1080i

GEOMETRIC

Item	FUNCTION	RANGE	INITIAL DATA	Performance of adjustment	EEP-ROM COPY DATA			
					54”	62”	55”	65”
VS	V-Shift	0~255	210	Variable	130	130	130	130
VA	V-Size	0~255	50	Variable	80	80	80	80
VL	V-Line	0~255	128	X	120	120	120	120
VSC	V-S-CORR	0~255	128	X	128	128	128	128
VE	V-EHT	0~255	0	X	0	0	0	0
HA	H-Size	0~255	75	Variable	90	90	90	90
PPH	PIN-PHS	0~255	128	X	128	128	128	128
PAM	PIN-AMP	0~255	70	X	70	70	70	70
UPC	UP-CORR	0~255	128	x	128	128	128	128
LOC	LO-CORR	0~255	128	x	128	128	128	128
HEH	H-EHT	0~255	0	x	0	0	0	0
HS	H-Shift	0~127	68	x	68	68	68	68
VAN	V-Angle	0~255	128	x	128	128	128	128
VBO	V-Bow	0~255	128	x	128	128	128	128
HSP	H-Sync-PH	0~255	138	x	138	138	138	138
OFS	Off set	0~1	0	x	0	0	0	0
VSO	VS-Offset	0~255	57	Variable	57	85	0	0
VAO	VA-Offset	0~255	70	Variable	70	95	60	60
VLO	VL-Offse	0~25	0	Variabl	0	0	0	0
Set after changing the option for 1080i-mode factory-scan (OFS 0->1) *Only DTV 1080i Mode								

4-2-3 D/TV 480P

GEOMETRIC

Item	FUNCTION	RANGE	INITIAL DATA	Performance for adjustment	EEP-ROM COPY DATA			
					54”	62”	55”	65”
VS	V-Shift	0~255	115	Variable	110	110	110	110
VA	V-Size	0~255	60	Variable	100	100	100	100
VL	V-Line	0~255	120	X	128	128	128	128
VSC	V-S-CORR	0~255	128	X	128	128	128	128
VE	V-EHT	0~255	0	X	0	0	0	0
HA	H-Size	0~255	70	Variable	82	82	82	82
PPH	PIN-PHS	0~255	128	X	128	128	128	128
PAM	PIN-AMP	0~255	70	X	82	82	82	82
UPC	UP-CORR	0~255	128	x	128	128	128	128
LOC	LO-CORR	0~255	128	x	128	128	128	128
HEH	H-EHT	0~255	0	x	0	0	0	0
HS	H-Shift	0~127	90	Fix	82	82	82	82
VAN	V-Angle	0~255	128	x	128	128	128	128
VBO	V-Bow	0~255	128	x	128	128	128	128
HSP	H-Sync-PH	0~255	138	x	138	138	138	138
OFS	Off set	0~1	0	x	0	0	0	0
VSO	VS-Offset	0~255	57	x	57	85	0	0
VAO	VA-Offset	0~255	70	x	70	95	60	60
VLO	VL-Offse	0~255	0	x	0	0	0	0
Set after changing the option for 1080i-mode factory-scan (OFS 0->1) *Only DTV 1080i Mode								

PIP

Item	FUNCTION	INITIAL DATA	Performance for adjustment	EEP-ROM COPY DATA			
				54”	62”	55”	65”
CONTRAST	CONTRAST	8	Variable	8	8	8	8
HUE	HUE	0	Variable	0	0	0	0
POS-HOR-L	POS-HOR-L	5	Variable	2	2	2	2
POS-HOR-R	POS-HOR-R	54	Variable	60	60	60	60
POS-VER-U	POS-VER-U	5	Variable	21	21	21	21
POS-HOR-D	POS-HOR-D	33	Variable	22	22	22	22

OPTION

Item	FUNCTION	INITIAL DATA	Performance for adjustment	EEP-ROM COPY DATA			
				545R	5415R	6215R	
Byte 0	Option	00	Variable	08	68	68	
Byte 1	Option	00	Variable	00	01	01	
Item	FUNCTION	INITIAL DATA	Performance for adjustment	EEP-ROM COPY DATA			
				552W	5515W	652W	6515W
Byte 0	Option	00	Variable	89	E9	89	E9
Byte 1	Option	00	Variable	00	01	00	01

4-3 Screen Change (When adjusting I²C Bus Geometric items)

1 V SHIFT



2 V LINEARITY

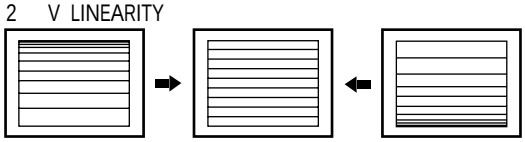

3 H SIZE

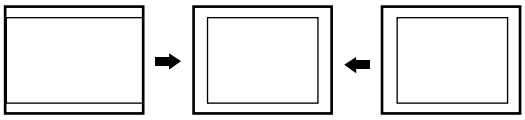

4 PIN AMP

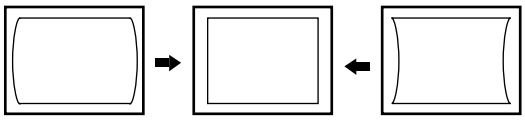

5 V ANGLE

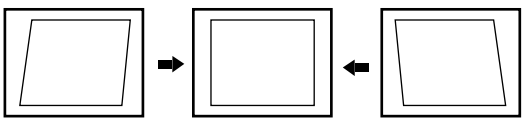

6 V SIZE



7 V - S - CORRECTION



8 PIN PHASE

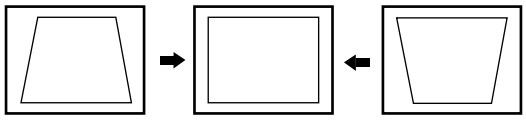

9 H SHIFT

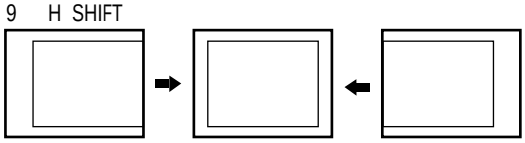

10 V BOW

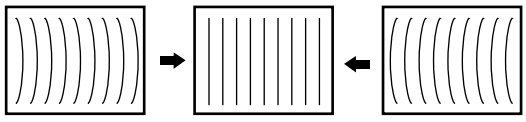

4-4 Other Adjustments

4-4-1 Screen Adjustment

1. Warm up the TV for at least 30 minutes.
2. Turn to the Video Mode (No Signal) using a remote-control.
3. Connect an oscilloscope to RK,GK,BK.
4. Adjust the VR (VR501, VR531, VR561) screen so that RK, GK, BK pulse is 20Vp-p each. (Turn the R,G,B VR screen fully counterclockwise in the area of each flyback line.)

4-4-2 White Balance Adjustment

1. Select the “STANDARD” video mode.
2. Input 100% white pattern.
3. In the stand-by mode, press the remote-control keys in the following sequence:
   Mute → 1 → 8 → 2 → Power ON
4. Warm up the TV for at least 30 minutes.
5. Input a 10-step signal.
6. R-cut off, B-cut off, and G-cut off by pressing the Volume +/- keys.
7. Adjust the low light with viewing the dark side of the screen.
8. Select R-drive, G-drive, and B-drive by pressing the Volume +/- keys.
9. Adjust the high light with viewing the light side of the screen.
10. If necessary, redo adjustments 6~9.
11. Press the Menu key to exit.

4-4-3 Sub-Brightness Adjustment

1. Input a sub-brightness adjustment signal. (TOSHIBA PATTERN)
2. In the stand-by mode, press the remote-control keys in the following sequence :
   Mute - 1 - 8 - 2 - Power ON
3. Select SBT by pressing the Volume +/- keys.
4. Adjust so that the 63 step on the right side of the screen is not seen (Use the Volume +/- keys).
5. Press the Menu key to exit.

4-4-4 High Voltage (29KV) Check

PRECAUTION

1. Input a lion head pattern.
2. Select “STANDARD” video mode.
3. Warm up the TV for at least 10 minutes.
4. Use a 1000:1 probe.

ADJUSTMENT

1. Connect the (+) terminal of the 1000:1 probe to the high voltage distributor and the (-) terminal to GND (located on the deflection board).
2. Adjust RR471S (located on the deflection board) so that the digital meter indicates DC 29V ± 0.1V.

4-4-5 F.S. (Fail Safe) Adjustment

Note : The finished product has a well-mounted VR (RR402S).
If necessary, do the F.S. adjustments in the following sequence.

1. Use a digital multimeter.
2. Connect the digital multimeter to the JIG pin (DZ482S) terminals
3. Adjust VR (RR402S) so that the voltage becomes 2.25V.
4. After the adjustments are complete, be sure to mount VR (RR402S) correctly.

4-4-6 F.S. (Fail Safe) Circuit Check

Note : The F.S. Circuit check must be performed after servicing.

1. Turn on the TV.
2. Select the “STANDARD” video mode.
3. Short F/S Test point (located on the SUB PCB). Then, both sound and picture disappear. (Note: Even if the shorted terminals are removed, both sound and picture do not appear. This proves the F.S. circuit is working.)
4. To restore both sound and picture, turn off the TV and reset it after about 30 seconds.

4-4-7 Static Focus Adjustment

PRECAUTION

1. Select the “STANDARD” video mode.
2. Input a crosshatch pattern.
3. Cover the lenses that are not being adjusted.
4. Connect a convergence jig and read data.
5. Adjust the lens for best focus. (See Fig, 4-1, next page)

STATIC FOCUS (CONTINUED)

Vary the focus pack VR (Red, Blue) on the front cabinet. Adjust the TV for best possible focus around the center of the crosshatch pattern, without losing overall screen balance.
Figure Crosshatch Pattern
Examine these points together.



Fig. 4-1 Crosshatch Pattern.

4-4-8 Lens Focus Adjustment

PRECAUTIONS

1. Do this adjustment after the static focus adjustment and the tilt adjustment.
2. Select the “STANDARD” video mode. (Contrast:100, Brightness:50)
3. Input a crosshatch pattern.

ADJUSTMENT

1. Loosen the lens screws.
2. Cover the two lenses that are not being adjusted.
3. Adjust the lens, observing the color aberration vertically and horizontally within 3 blocks of the center of the crosshatch pattern.
4. When the lens is turned clockwise, the color aberration will change as follows:

Lens	Color Aberration Change
R	Orange - Crimson
G	Blue - Red
B	Purple - Green

5. Green lens adjustment:
   Set the lens at the point where Blue just changes to Red. If the color aberration is irregular throughout the picture screen, adjust the lens to show Red color aberration (approximately 1~3 mm area) within a 3-block grid around the horizontal center-line. If the color aberration is irregular, adjust the lens as shown in the diagram below. (Accurate alignment of Green is important for overall color quality.)
6. Red lens adjustment
   Set the Red lens at the point where Orange becomes Crimson.
7. Blue lens adjustment
   Set the Blue lens at the point where Purple becomes Green.



Fig. 4-2 Color Aberration

4-4-9 Horizontal Dynamic Focus Adjustment

PRECAUTION

1. Input a crosshatch pattern.
2. Select the “STANDARD” video mode.
3. Warm up the set for at least 10 minutes.

ADJUSTMENT

1. Cover the Red and Blue lenses.
2. Use a digital multimeter.
3. Connect the '+' terminal of digital multimeter to D-Focus and the '-' terminal to GND.
4. Adjust L434 located on the sub PCB so that the digital multimeter indicates AC690±20Vp-p.
5. Balance the left and right sides of the dynamic focus lines.

4-5 Screen-Jig

4-5-1 PCL545R/PCL5415R(NORMAL MODE)

Screen Size : X 1098.4, Y 827.4 (X:378=9*2+30*12, Y:440=28*2+64*6)

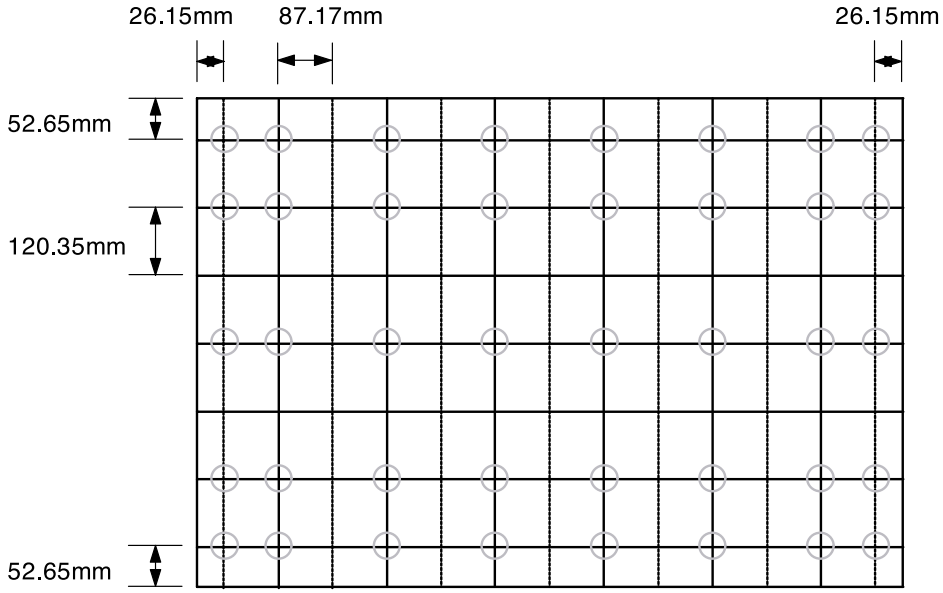

Note: "O" Cursor Point

4-5-2 PCL545R/PCL5415R(DTV MODE)

Screen Size : X 1098.4, Y 627.4(X:378=9*2+30*12, Y:488=40*2+68*6)

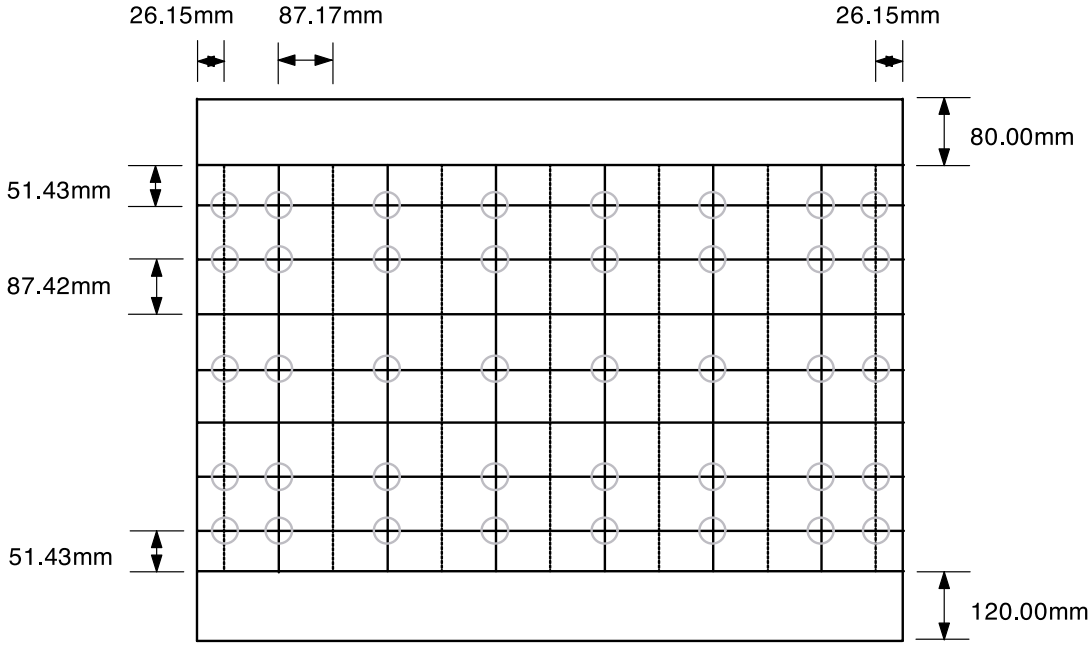

Note: "O" Cursor Point

4-5-3 PCL6215R(NORMAL MODE)

Screen Size : X 1253, Y 943 (X:378=9*2+30*12, Y:440=28*2+64*6)

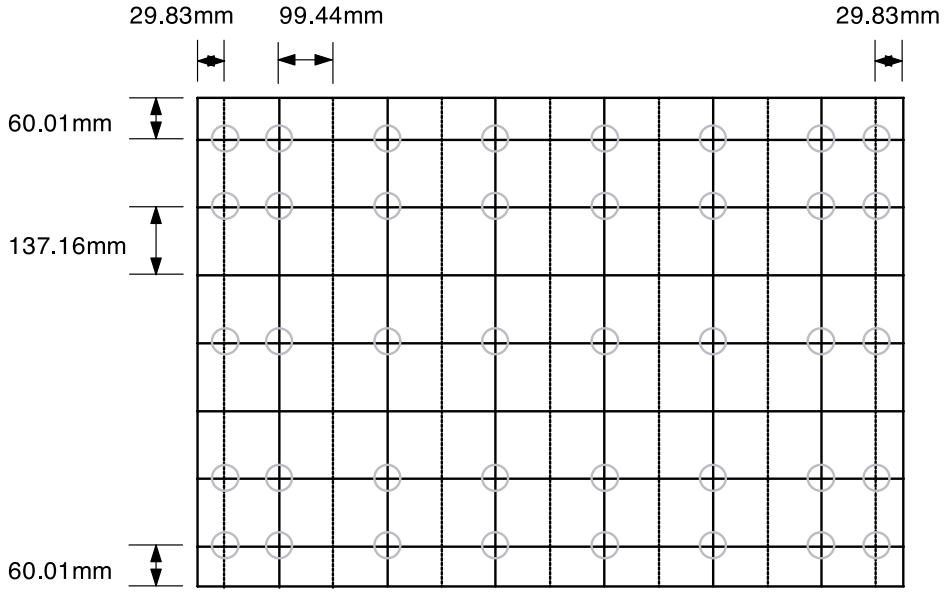

Note: "O" Cursor Point

4-5-4 PCL6215R(DTV MODE)

Screen Size : X 1253, Y 688+90+165(X:378=9*2+30*12, Y:488=40*2+68*6)

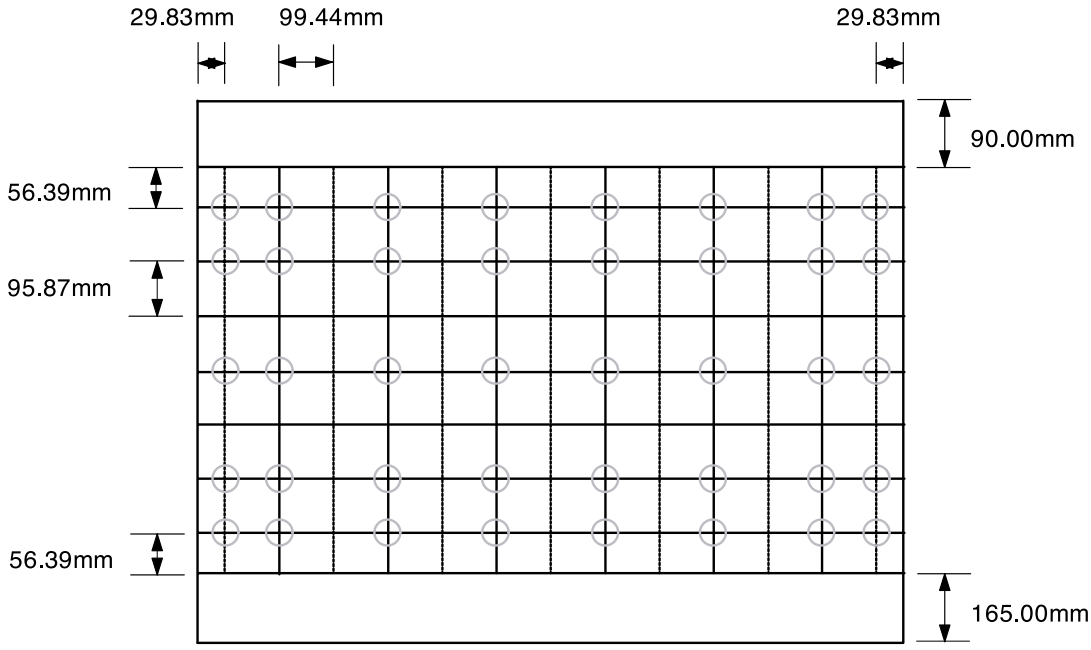

Note: "O" Cursor Point

4-5-5 46J8(NORMAL MODE)

Screen Size : X 1019.4 Y 573.4(X:378=9*2+30*12, Y:440=28*2+64*6)

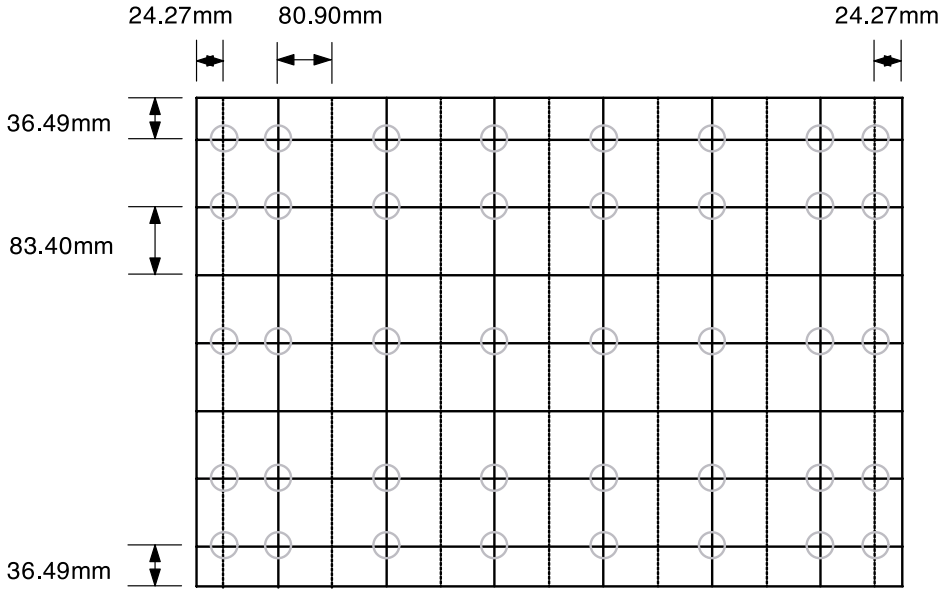

Note: "O" Cursor Point

4-5-6 46J8(DTV MODE)

Screen Size : X 1019.4 Y 573.4 (X:378=9*2+30*12, Y:488=40*2+68*6)

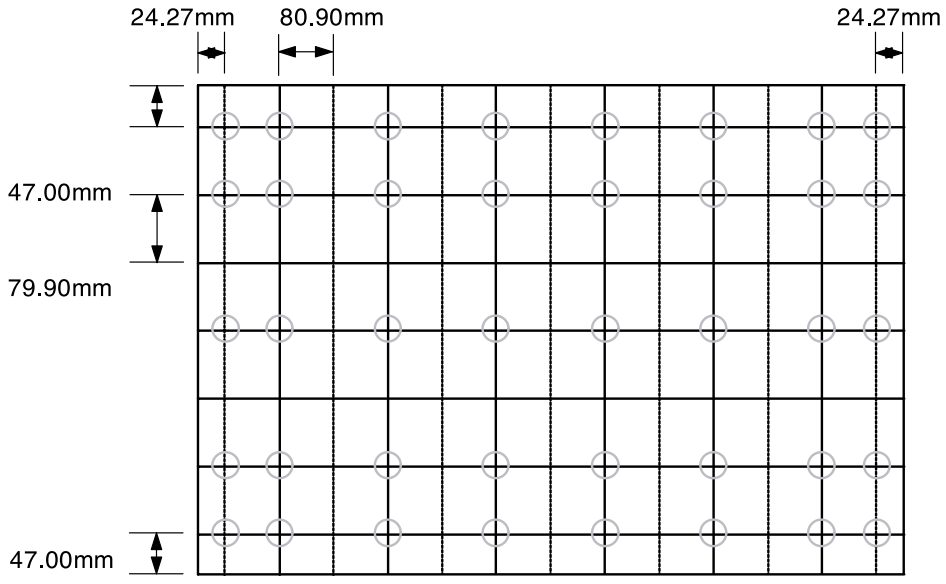

Note: "O" Cursor Point

4-5-7 552W/5515W(NORMLA MODE)

Screen Size : X 1215, Y 680 (X:378=9*2+30*12, Y:440=28*2+64*6)

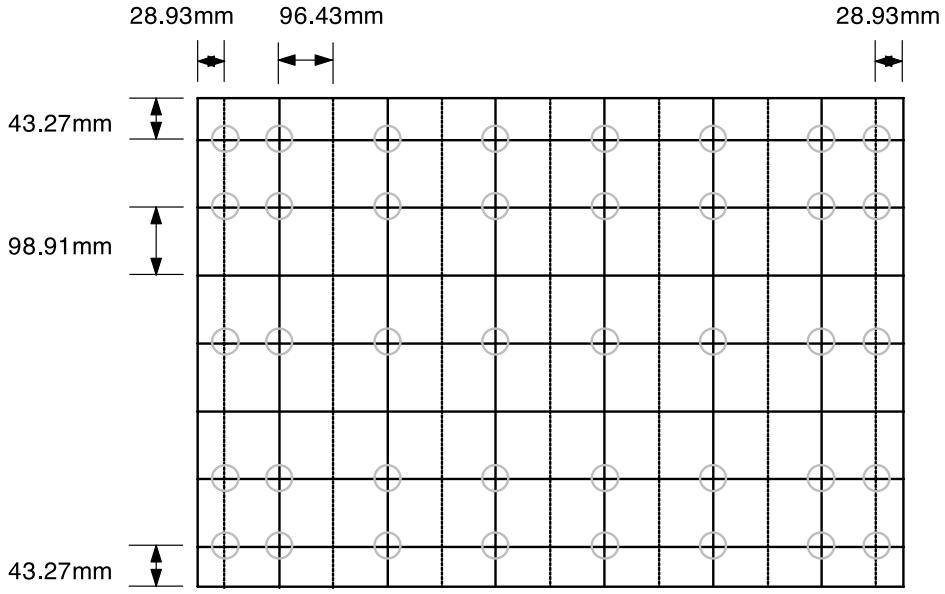

Note: "O" Cursor Point

4-5-8 552W/5515W(DTV MODE)

Screen Size : X 1215, Y 680 (X:378=9*2+30*12, Y:488=40*2+68*6)

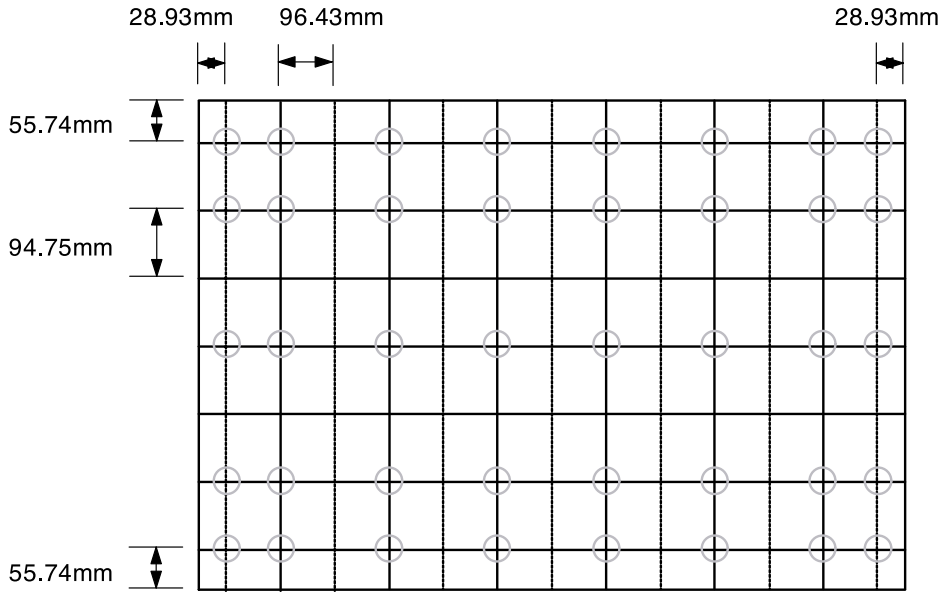

Note: "O" Cursor Point

4-5-9 652W/6515R(NORMAL MODE)

Screen Size : X 1444, Y 832 (X:378=9*2+30*12, Y:440=28*2+64*6)

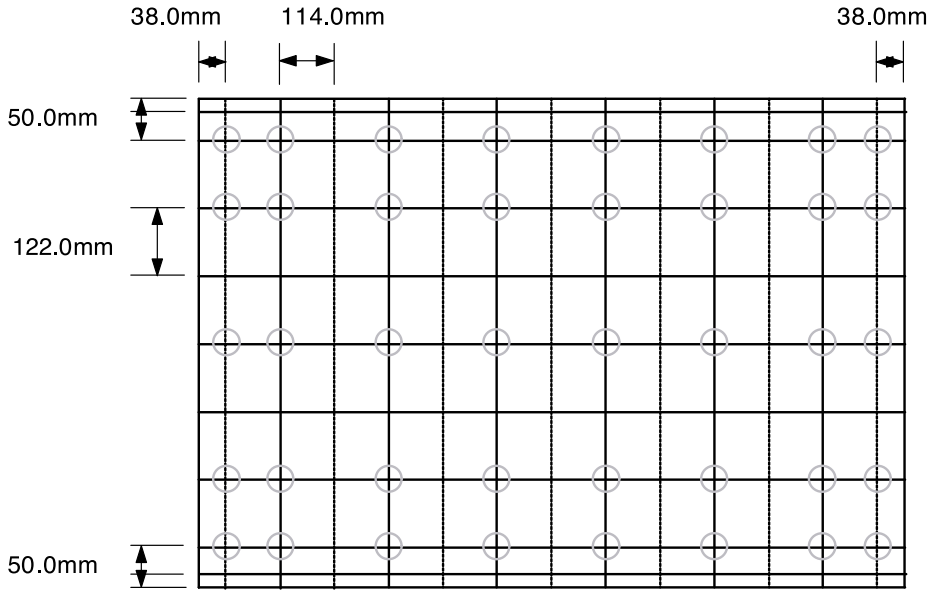

Note: "O" Cursor Point

4-5-10 652W/6515R(DTV MODE)

Screen Size : X 1444, Y 832 (X:378=9*2+30*12, Y:488=40*2+68*6)

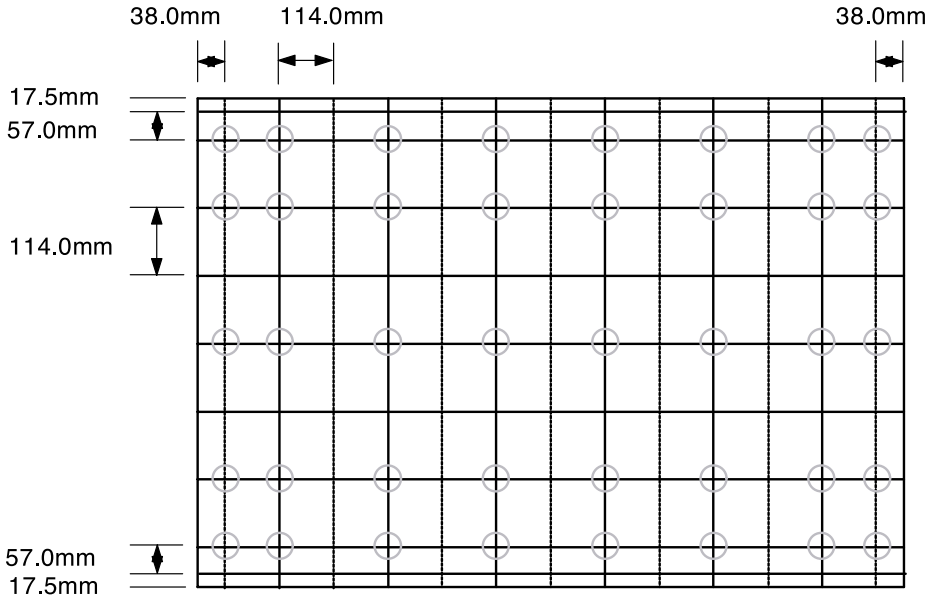

Note: "O" Cursor Point

4-6 Remote Control for Servicing (Convergence Mode)

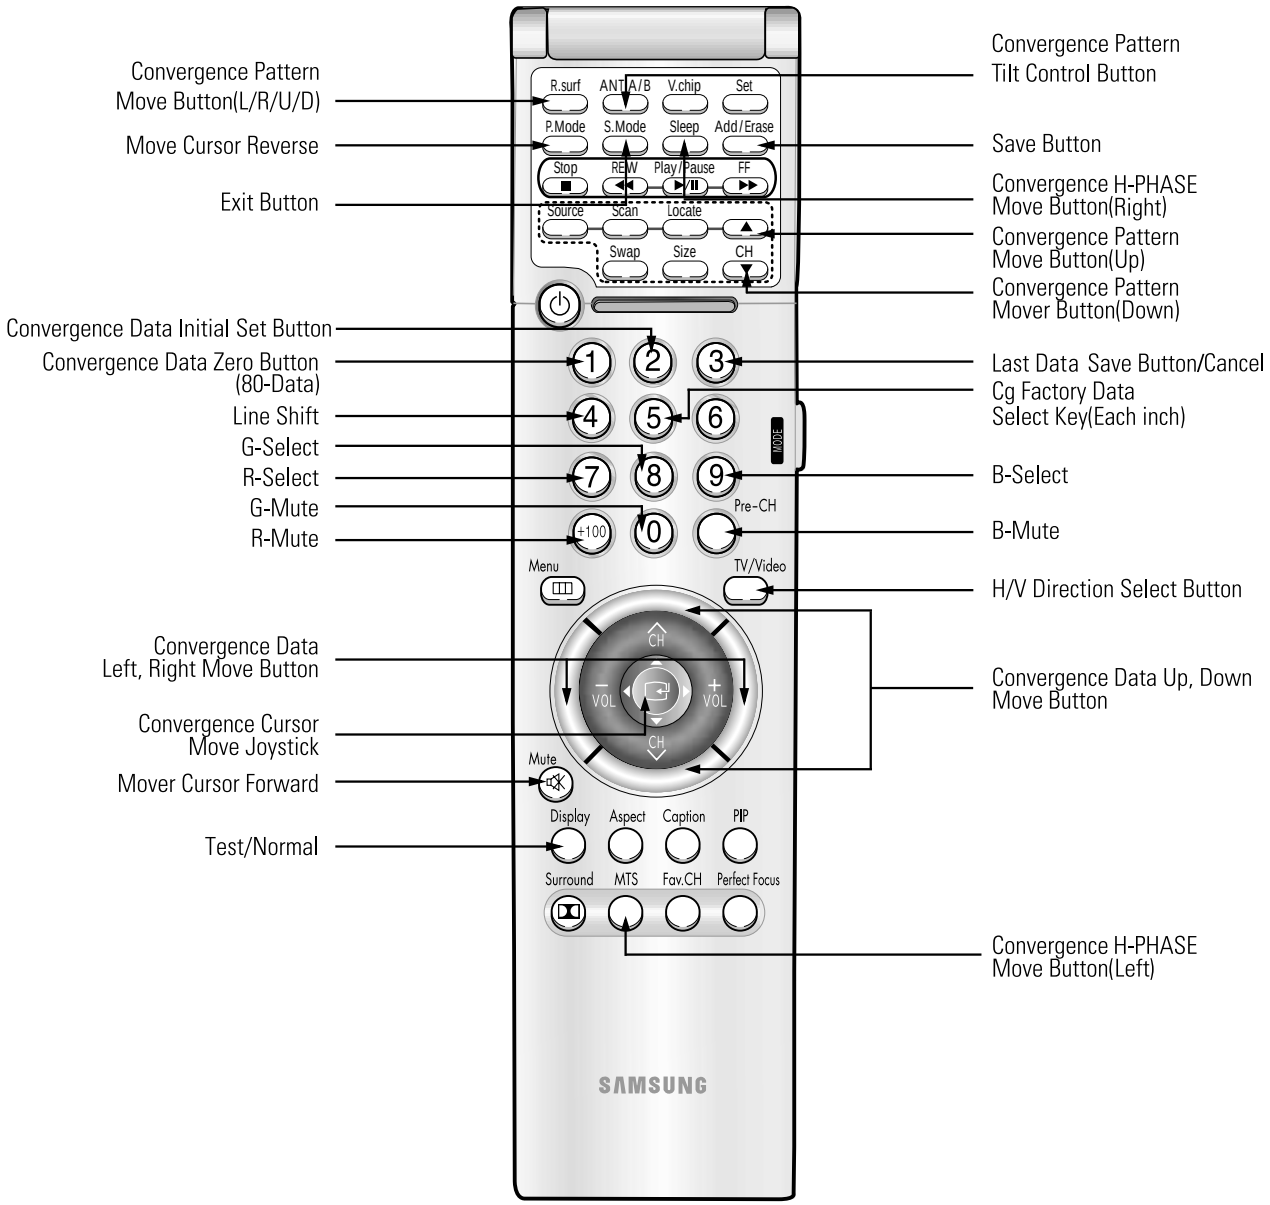

4-6-1 KEY Function

1. R-SELECT (7)
   Press to select RED color.

2. G-SELECT (8)
   Press to select GREEN color.

3. B-SELECT (9)
   Press to select BLUE color.

4. R-MUTE (+100)
   Press to mute RED color.

5. G-MUTE (0)
   Press to mute GREEN color.

6. B-MUTE (Pre-CH)
   Press to mute BLUE color.

7. CANCEL KEY (3)
   Press to revert to the previous data during the Convergence Adjustment.

8. TEST / NORMAL (Display)
   Press to check TV mode in the Convergence Mode.

9. LINE SHIFT (4)
   Press to move a line up / down or left / right.

10. FACTORY DATA SELECT BUTTON (2)
    Press to call the factory default values.

11. H / V DIRECTION SELECT BUTTON (TV/Video)
    Press to switch the cursor direction horizontally or vertically.

12. SAVE BUTTON (Add/Erase)
    After the Convergence Adjustments are completed, press to save data.

13 EXIT BUTTON (S.Mode)
   After the Convergence adjustments are completed, press to exit to TV mode.

14. MOVE CURSOR FORWARD (Mute)
Press to move the cursor right or down.

15. MOVE CURSOR REVERSE (P.Mode)
Press to move the cursor left or up.

16. CONVERGENCE PICTURE MOVE BUTTON

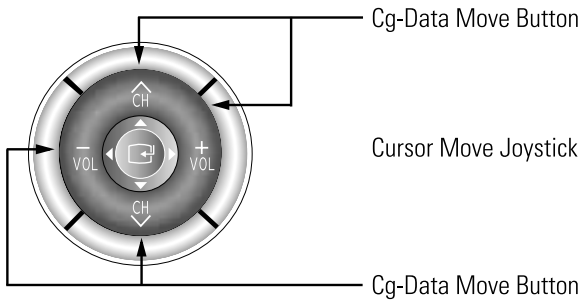

17. CONVERGENCE MOVE BUTTON
Press to move the convergence left (MTS) or right (Sleep) .

18. CONVERGENCE DATA ZERO BUTTON (1)
Press to zero the convergence correction data.

19. INITIAL DATA SET BUTTON (2)

Changes when applying Almighty-Cg, Module (How to extract the basic Cg Data)

Inch (Type)	Model Name	Basic Data	Screen Display	Discription
	Representative Model	Number after entring the Cg-Mode		
54” (54J9)	PCL545R/ PCL5415R	5-545 (Press in regular order)	+ + + + +	White Oval on the background (white circle)
62” (62J9)	PCL6215R	5-625 (Press in regular order)	+ + + + + +	
55” (552W)	HCL552W/ 5515W	5-552 (Press in regular order)	⬭ ⬭ ⬭ ⬭ ⬭	White Oval on the background (white border)
65” (652W)	HCL652W/ 6515W	5-652 (Press in regular order)	⬭ ⬭ ⬭ ⬭ ⬭ ⬭	

20. Move Convergence Pattern P54A Service Manual (R.surf)
After pressing the R.surf button, use the Channel Up / Down and Volume + / - buttons to move the Convergence Pattern up / down / left / right.

21. Convergence Pattern Tilt Control Button (ANT A/B)
After pressing the ANT A / B button, use the Channel Up / Down and Volume + / - buttons to create a tilt to the Convergence Pattern.

NOTE Note : Use the following two buttons only when they are indispensable.

4-7 Convergence Adjustment

NOTE **Special Notes**

- A sensor is attached on the center of each side of the Convergence Mode pattern (see figure below). The sensors are required for normal Perfect Focus function.
- Use a screen jig to do the convergence adjustments correctly (Especially, perform correct convergence adjustments on the center of each side where a sensor is located.)
- Do the convergence adjustments correctly. Otherwise, any Perfect Focus error can happen.

1. Warm up the TV for a least 30 minutes.

2. Input an NTSC Signal.(Use an antenna or AV source.)

NOTE Make sure that deflection yoke are properly adjusted so that the center of Green, Red, Blue pattern is aligned on the center of screen jig.

3. Enter the Convergence Mode by Pressing the remote control keys in the following sequence:

Menu → 1 → 8 → 3

NOTE If OSD displayed as shown in figure below, press the S.Mode key to exit. Then, redo step 3 to enter the Convergence Mode.
After entering the Convergence Mode, Stand by for about five seconds before doing the adjustments.

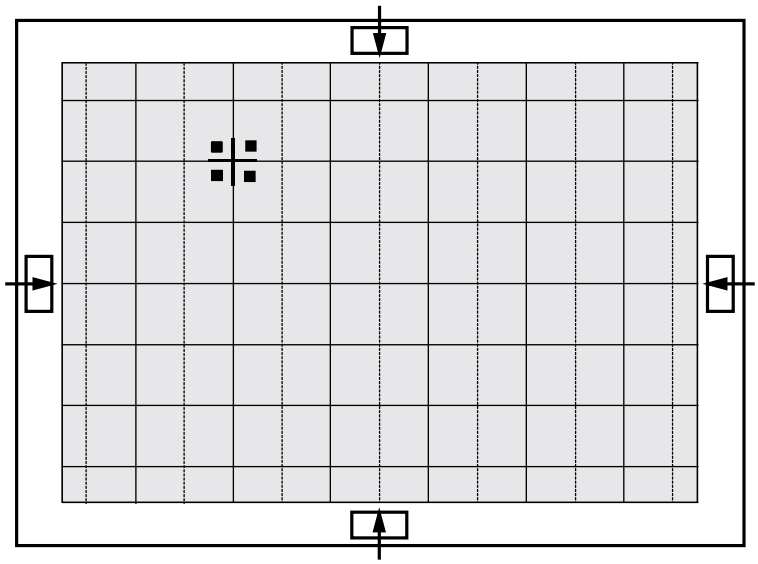

4. To adjust GREEN, first press the +100 and the Pre-CH keys, and then press the 8 key.

5. The TV/Video key moves the cursor horizontally or vertically.

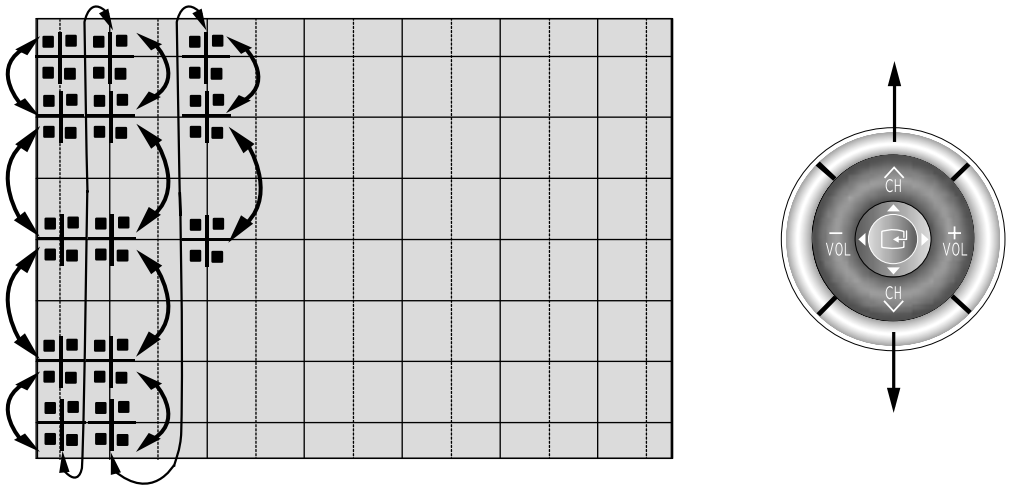

NOTE When the TV/Video key is pressed once again, the cursor moves horizontally.

6. The Mute key moves the cursor right, and the P.Mode key moves the cursor left.

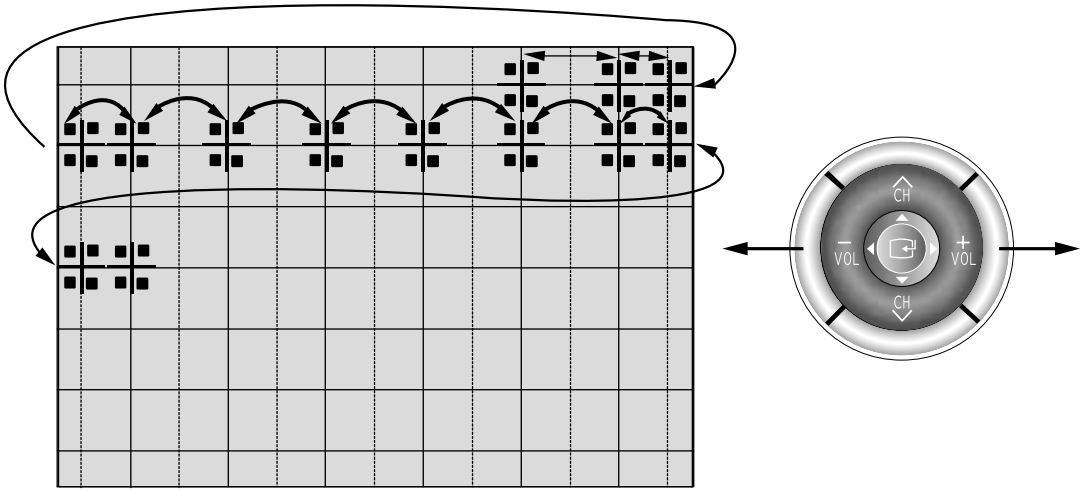

7. New Adjustment

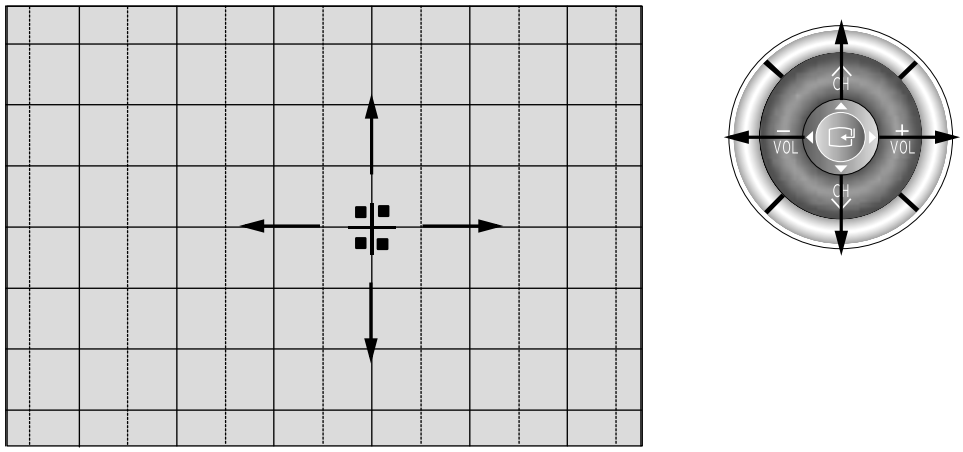

NOTE Use the joystick on the remote control(type: TM63) to move the cursor.
Move the joystick left/right/up/down to move the cursor left/right/up/down.

8. Use the (4) key for overall balance.

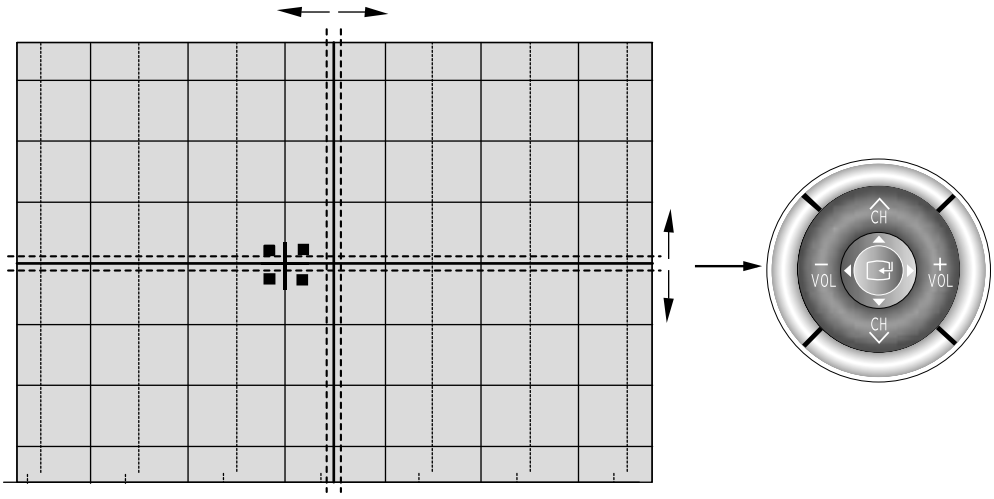

9. After the Line Shift is cancelled by pressing the (4) key, use the Channel and Volume keys (Up/Down) to make big adjustments.

10. After the green convergence adjustments are completed, press the Add/Erase key to save the data.

11. Superimpose the Red and Green colors by pressing the +100 and the 7 keys.

12. To adjust RED, redo steps 5~8.

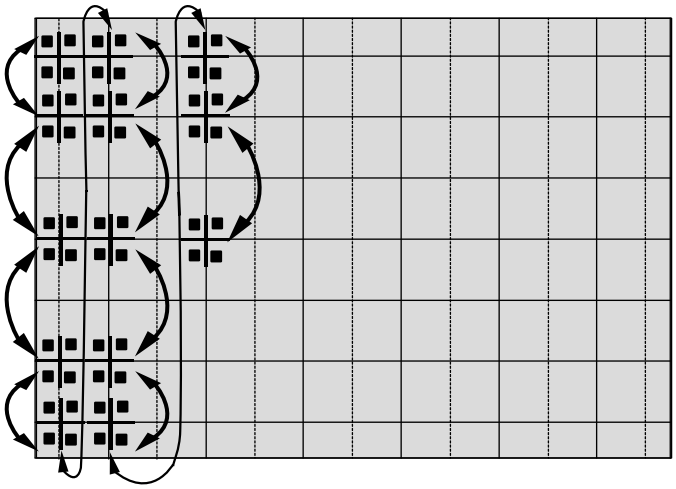

When the cursor moves vertically TV/Video

13. To superimpose the blue and green colors, press (1) the +100 key for R-Mute, (2) the Pre-CH key to cancel the B-Mute, and (3) the 9 key for B-select.

14. To adjust BLUE, redo steps 5 ~ 8, 12.

15. If any color is not properly adjusted when displaying the red, blue and green colors, readjust the color.

16. After the color adjustments are completed, press the (Add/Erase) key to save the data.

NOTE The cursor moves to center, and then automatically moves up and to the left about five seconds later.

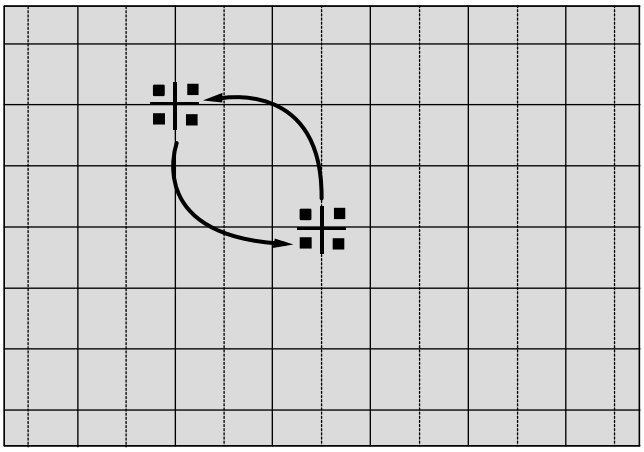

17. After the adjustment is completely saved, press the Perfect Focus key to perform Auto Convergence(Factory Mode). Auto Convergence is performed in the following sequences:

G → R → B

UP → LEFT → DOWN → RIGHT

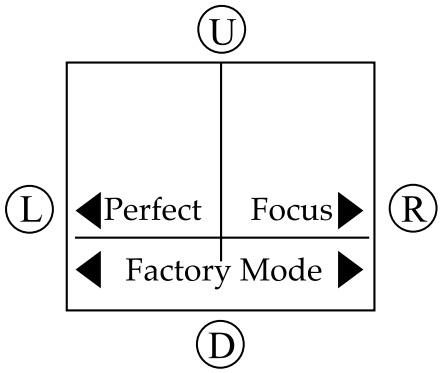

When Auto Convergence is complete, the data is automatically saved and the convergence pattern reverts.

NOTE
- After Factory Auto Convergence is complete, make sure that the cursor flickers for about 1 second on the center and then it is saved.
- Check the presence of error through the flicker of the cursor.
- When any error happens, be sure to re-do Factory Auto Convergence.
- When Convergence Adjustment is not normally done or the convergence center is misaligned with the sensing point, any adjustment error happens. Therefore, be sure to use a screen jig to correctly adjust during troubleshooting.

18. After the Convergence Adjustments are completed, press the S.Mode key to exit.

19. DTV Convergence Adjustment must be done same as the above Normal Mode Convergence Adjustment (Use a 16:9 screen jig for DTV)

20. After DTV Convergence Adjustment is complete, do the following items for normal operation of Perfect Focus.

    ① Select a DTV mode (Pattern: Lion Head Pattern)

    ② Enter the Factory Mode to change OFS 0 → 1

    ③ Move the mode geometrically in V-Size increased.

    ④ Adjust VSO/VAO/VLO to change the value of V-Size/V-Shift offset.
    (Vertical Size: 2.5~2:2.5~2/Horizontal Size: 5:5)

    ⑤ Re-change the OFS after all the adjustments are complete.
    (OFS 1 → 0)

    ⑥ Exit the Factory Mode.

    ⑦ Enter the Convergence Adjustment Mode.

    ⑧ Press the Perfect Focus key.
    (OSD: "Factory Mode")

    ⑨ If nothing is abnormal, then exit from the Convergence Adjustment Mode.

    ⑩ Re-do Perfect Focus in User Mode.
    (OSD: "Mode ON")

    ⑪ If no error happens, complete Perfect Focus.

NOTE

When Convergence Adjustment is not normally done or the convergence center is misaligned with the sensing point, any adjustment error happens. Therefore, be sure to use a screen jig to correctly adjust during troubleshooting.

4-8 MICOM and Pins Voltage

4-8-1 Pin Layout(Pro Gressive)

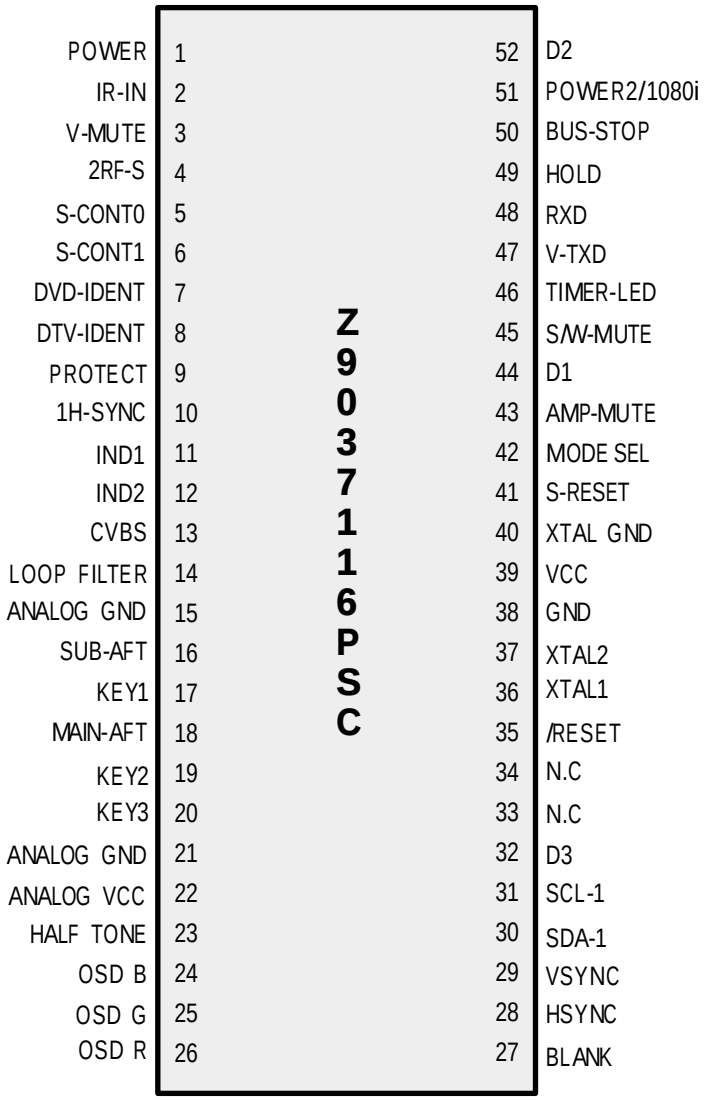

4-8-2 MICOM Pins(Progressive)

PIN NO.	ITEM	FUNCTION	OUT VOLT
1	POWER	POWER ON/OFF RELAY CONTROL	L --> H
2	IR IN	REMOCON INPUT	5V
3	V-MUTE	VIDEO SIGNAL MUTE	3V
4	2RF-S	2RF-SWITCHING	5V
5	S-CONT0	SOUND MODE SELECT	5V
6	S-CONT1	SOUND MODE SELECT	5V
7	DVD-IDENT	DVD-IDENT	5V
8	DTV-IDENT	DTV-IDENT	-
9	PROTECT	PROTECT PORT	-
10	1H-SYNC	NORMAL H,V-SYNC	3.5V
11	IND1	CLOCK BUS LINE	4.5V
12	IND2	DATA BUS LINE	4.5V
13	CVBS	CVBS	1.7V
14	LOOP FILTER	LOOP FILTER	1.9V
15	ANALOG GND	GND	GND
16	SUB-AFT	SUB AUTO FINE TURNING CONTROL	2.64V
17	KEY 1	KEY SCAN 1	4.84V
18	MAIN-AFT	MAIN TUNER AFT	1.9V
19	KEY 2	KEY SCAN 2	-
20	KEY 3	KEY SCAN 3	-
21	ANALOG GND	GND	-
22	ANALOG VCC	VCC	5V
23	HALF TONE	SIGNAL FOR OSC-FREQUENCY OSD CONTROL	-
24	OSD B	ON SCREEN DISPLAY BLUE OUTPUT	-
25	OSD G	ON SCREEN DISPLAY GREEN OUTPUT	-
26	OSD R	ON SCREEN DISPLAY RED OUTPUT	-

PIN NO.	ITEM	FUNCTION	OUT VOLT
27	BLANK	BLAKING SIGNAL OUTPUT	-
28	HSYNC	HORIZONTAL SYNC INPUT	-
29	VSYNC	VERTICAL SYNC INPUT	-
30	SDA-1	DATA BUS LINE	4.5V
31	SCL-1	CLOCK BUS LINE	4.12V
32	D3	CONVERGENCE D3	-
33	N.C	N.C	-
34	N.C	N.C	-
35	/RESET	RESET	4.74V
36	XTAL1	XTAL 1	1.72V
37	XTAL2	XTAL 2	2.2V
38	GND	GND	-
39	VCC	VCC	5V
40	XTAL GND	GND	-
41	S-RESET	SOUND RESET	-
42	MODE SELECT	DVD MODE SELECT(480i/480p)	5V
43	AMP-MUTE	MAIN AMP MUTE	-
44	D1	CONVERGENCE D1	-
45	S/W-MUTE	SWITCH MUTE (NOT USED)	-
46	TIMER-LED	TIMER LED	4.7V
47	V-TXD	-	4.6V
48	RXD	-	4.6V
49	HOLD	HOLD	4.65V
50	BUS-STOP	I^2C BUS STOP	5V
51	POWER2/1080i	1080i RELAY CONTROL	4.65V
52	D2	CONVERGENCE D2	-

4-8-3 Proscan Module (Progressive)

PIN NO.	ITEM	FUNCTION	OUT VOLT
1	Pr/R	Pr/R INPUT	2.0V
2	Y/G	Y/G INPUT	2.0V
3	Pb/B	Pb/B INPUT	2.0V
4	FB	FAST BLANKING INPUT	0.25V
5	GND	GND	-
6	HC	5V INPUT	-
7	VS1	VS1 INPUT	-
8	GND	GND	-
9	SDA	SERIAL DATA LINE	4.7V
10	SCL	SERIAL CLOCK LINE	4.8V
11	5V	5V	5V
12	27M	OPTION	-
13	GND	GND	GND
14	5V-	5V-	5V-
15	H-OUT	HORIZENTAL-OUT	N.C
16	V-OUT	VERTICAL-OUT	N.C
17	SCP		-
18	EW	EAST WEST OUT	2.2V
19	V-BLK	V-BLANKING	-
20	ABL	ABL INPUT	2.15V
21	AD-	VERTICAL DRIVE(-VOLTAGE)	2.95V
22	AD+	VERTICAL DRIVE(+VOLTAGE)	2.90V
23	H-BLK	H-BLANKING INPUT	-
24	HD	H-DRIVE OUT	1.6V
25	GND	GND	GND
26	PIP-RF		-
27	PIP-C		-
28	PIP-V/Y		-
29	GND	GND	GND
30	CVBS-Y		-

PIN NO.	ITEM	FUNCTION	OUT VOLT
31	CHR	CHROMA	-
32	GND	GND	GND
33	PC-R	N.C	-
34	PC-G	N.C	-
35	PC-B	N.C	-
36	PC-H	GND	GND
37	PC-V	OSD-R INPUT	-
38	GND	OSD-G INPUT	-
39	OSD-R	OSD-B INPUT	-
40	OSD-G	BLANK(MICOM OUT)	-
41	OSD-B	HALF TONE INPUT	-
42	YS/YM	VIDEO MUTE (V-CHIP ON)	4.72V
43	YS/YM	GND	GND
44	GND	9V	9V
45	9V	D-Pr INPUT	-
46	HD-Pr	D-Y INPUT	-
47	HD-Y	D-Pb INPUT	-
48	HD-Pb	N.C	-
49	GND	GND GND	
50	R-OUT	R-OUT	-
51	G-OUT	G-OUT	-
52	B-OUT	B-OUT	-
53	GND	GND	GND
54	IK	IK OUT	3.65V
55	GND	SPOT OUT	-
56	GND	GND	GND
57	VM-Y	VM-Y OUT	5.42V
58	YD	N.C	-
59	GND	GND	GND
60	CG-SYND	CG-SYNC INPUT	-

PIN NO.	ITEM	FUNCTION	OUT VOLT
61	CG-B	CG-B INPUT	-
62	CG-G	CG-G INPUT	-
63	CG-R	CG-R INPUT	-
64	GND	GND	GND

4-8-4 3D/COMB Module

PIN NO.	ITEM	FUNCTION	OUT VOLT
1	VIDEO	MAIN VIDEO INPUT	2.74V
2	GND	GND	GND
3	9V	9V INPUT	9V
4	GND	GND	GND
5	SCL	SERIAL CLOCK LINE	4.1V
6	SDA	SERIAL DATA LINE	4.1V
7	V-3D	COPY GUARD REJECT SIGNAL	3.8V
8	5V	5V INPUT	5V
9	Y-OUT	MAIN Y OUT	-
10	GND	GND	GND
11	C-OUT	MAIN C OUT	-
12	GND	GND	GND

4-8-5 Sound Module

PIN NO.	ITEM	FUNCTION	OUT VOLT
1	GND	GND	GND
2	GND	GND	GND
3	GND	GND	GND
4	S-RESET	SOUND RESET	-
5	MAIN-L	MAIN LEFT OUT	-
6	GND	GND	GND
7	GND	GND	GND
8	5V	5V	5V
9	MAIN-R	MAIN RIGHT OUT	-
10	GND	GND	GND
11	GND	GND	GND
12	GND	GND	GND
13	8V	8V	8V
14	SCL-1	SERIAL CLOCK LINE	-
15	GND	GND	GND
16	SDA-1	SERIAL DATA LINE	-
17	CENTER	CENTER OUT	-
18	GND	GND	GND
19	GND	GNAD	GND
20	12V	12V	12V
21	SURROUND	SURROUND OUT	-
22	GND	GND	GND
23	GND	GND	GND
24	S-F1	S-F1(ANT1)	-
25	GND	GND	GND
26	GND	GND	GND
27	AV4-L-IN	AV4 LEFT INPUT	-
28	A-MONO-IN	A-MONO INPUT	-
29	GND	GND	GND
30	GND	GND	GND

PIN NO.	ITEM	FUNCTION	OUT VOLT
31	AV4-R-IN	AV4 RIGHT INPUT	-
32	S-F2	S-F2(ANT2)	-
33	GND	GND	GND
34	GND	GND	GND
35	GND	GND	GND
36	GND	GND	GND
37	EXT-L-IN	EXTERNAL LEFT INPUT	-
38	H-PHONE-L	HEADPHONE LEFT OUT	-
39	GND	GND	GND
40	GND	GND	GND
41	EXT-R-IN	EXTERNAL RIGHT INPUT	-
42	H-PHONE-R	HEADPHONE RIGHT OUT	-
43	GND	GND	GND
44	GND	GND	GND
45	GND	GND	GND
46	GND	GND	GND
47	AV2-L-IN	AV2 LEFT INPUT	-
48	MONITOR-L	MONITOR OUT	-
49	GND	GND	GND
50	GND	GND	GND
51	AV2-R-IN	AV2 RIGHT INPUT	-
52	MONITOR-R	MONITOR OUT	-
53	GND	GND	GND
54	GND	GND	GND
55	GND	GND	GND
56	GND	GND	GND
57	AV1-L-IN	AV1 LEFT INPUT	-
58	AV1-L-OUT	AV1 LEFT OUTPUT	-
59	GND	GND	GND
60	GND	GND	GND

PIN NO.	ITEM	FUNCTION	OUT VOLT
61	AV1-R-IN	AV1 RIGHT INPUT	-
62	AV1-R-OUT	AV1 RIGHT OUT	-
63	GND	GND	GND
64	GND	GND	GND

4-8-6 Caption Module

PIN NO.	ITEM	FUNCTION	OUT VOLT
1	C-OUT	MAIN C-OUT	-
2	C-IN	MAIN C-IN	-
3	OSD-F/B	OSD-F/B IN	-
4	OSD-B	OSD-B IN	-
5	OSD-G	OSD-G IN	-
6	OSD-R	OSD-R IN	-
7	H-SYNC	H-SYNC	-
8	GND	GND	GND
9	CVBS	CVBS	-
10	5V-D	5V-D	-5V
11	GND	GND	GND
12	SCL	SCL	-
13	SDA	SDA	-
14	GND	GND	GND
15	V-SYNC	V-SYNC	-
16	V-OUT	SUB-BLK/MAIN-Y	-
17	12V	12V	12V
18	GND	GND	GND
19	OSD-F/B	OSD-F/B OUT	-
20	OSD-B	OSD-B OUT	-
21	OSD-G	OSD-G OUT	-
22	OSD-R	OSD-R OUT	-

4-8-7 CONV-Module

PIN NO.	ITEM	FUNCTION	OUT VOLT
1	6V	6V	6V
2	GND	GND	GND
3	FOCUS	N.C	-
4	GND	GND	GND
5	D2	SDA	-
6	D1	SCL	-
7	GND	GND	GND
8	C-SYNC	C-SYNC OUT	4.41V
9	R	WHEN TEST PATTERN R OUT	-
10	TEST-Y/G	WHEN TEST PATTERN G OUT	-
11	B	WHEN TEST PATTERN B OUT	-
12	D3	D3/NT-PAL SEL	0.2V
13	CTRL	CTRL	-
14	IR	INPUT REMOCON	3V
15	COMP	COMP VIDEO OUTPUT	-
16	GND	GND	GND
17	GND	GND	GND
18	GND	GND	GND
19	BV	BLUE VERTICAL OUT	-
20	BH	BLUE HORIZONTAL OUT	-
21	GV	GREEN VERTICAL OUT	-
22	GH	GREEN HORIZONTAL OUT	-
23	RV	RED VERTICAL OUT	-
24	RH	RED HORIZONTAL OUT	-
25	GND	GND	GND
26	H-BLK	H-BLANKING OUT	0.52V
27	V-BLK	V-BLANKING OUT	-
28	GND	GND	GND
29	N.C	N.C	-
30	-5.4V	-5.4V	-5.4V

PIN NO.	ITEM	FUNCTION	OUT VOLT
31	5.4V	5.4V	5.4V
32	GND	GND	GND

MENO

5. Troubleshooting

5-1 Convergence Misaligned

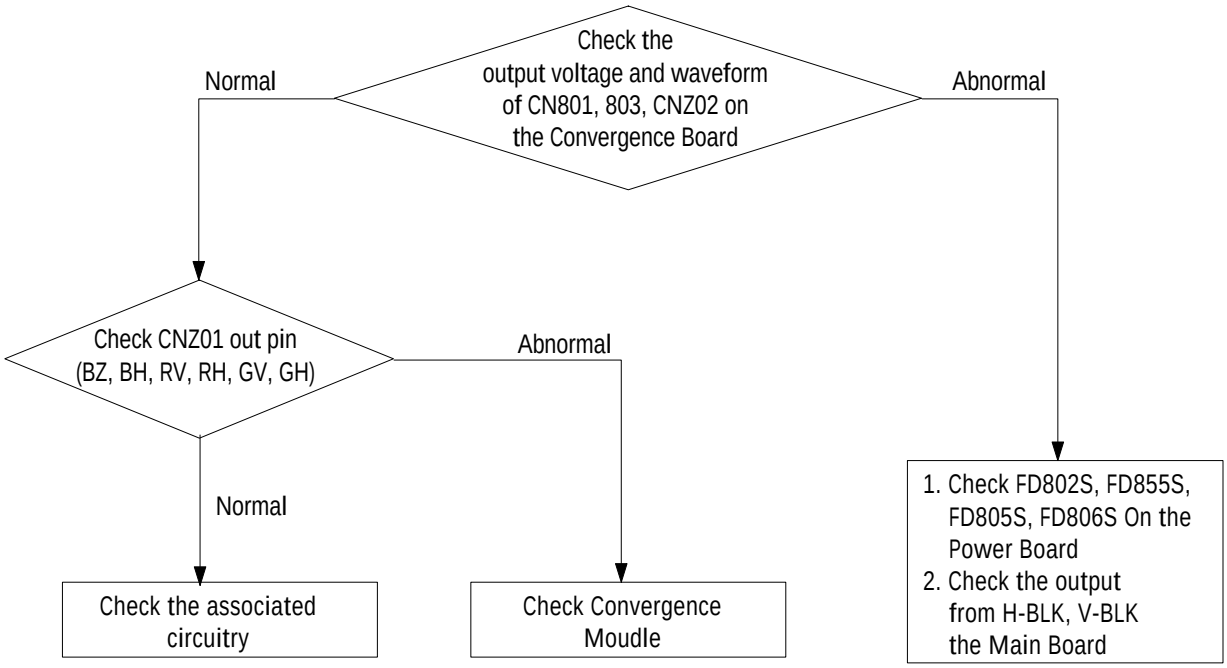

5-2 No Sound

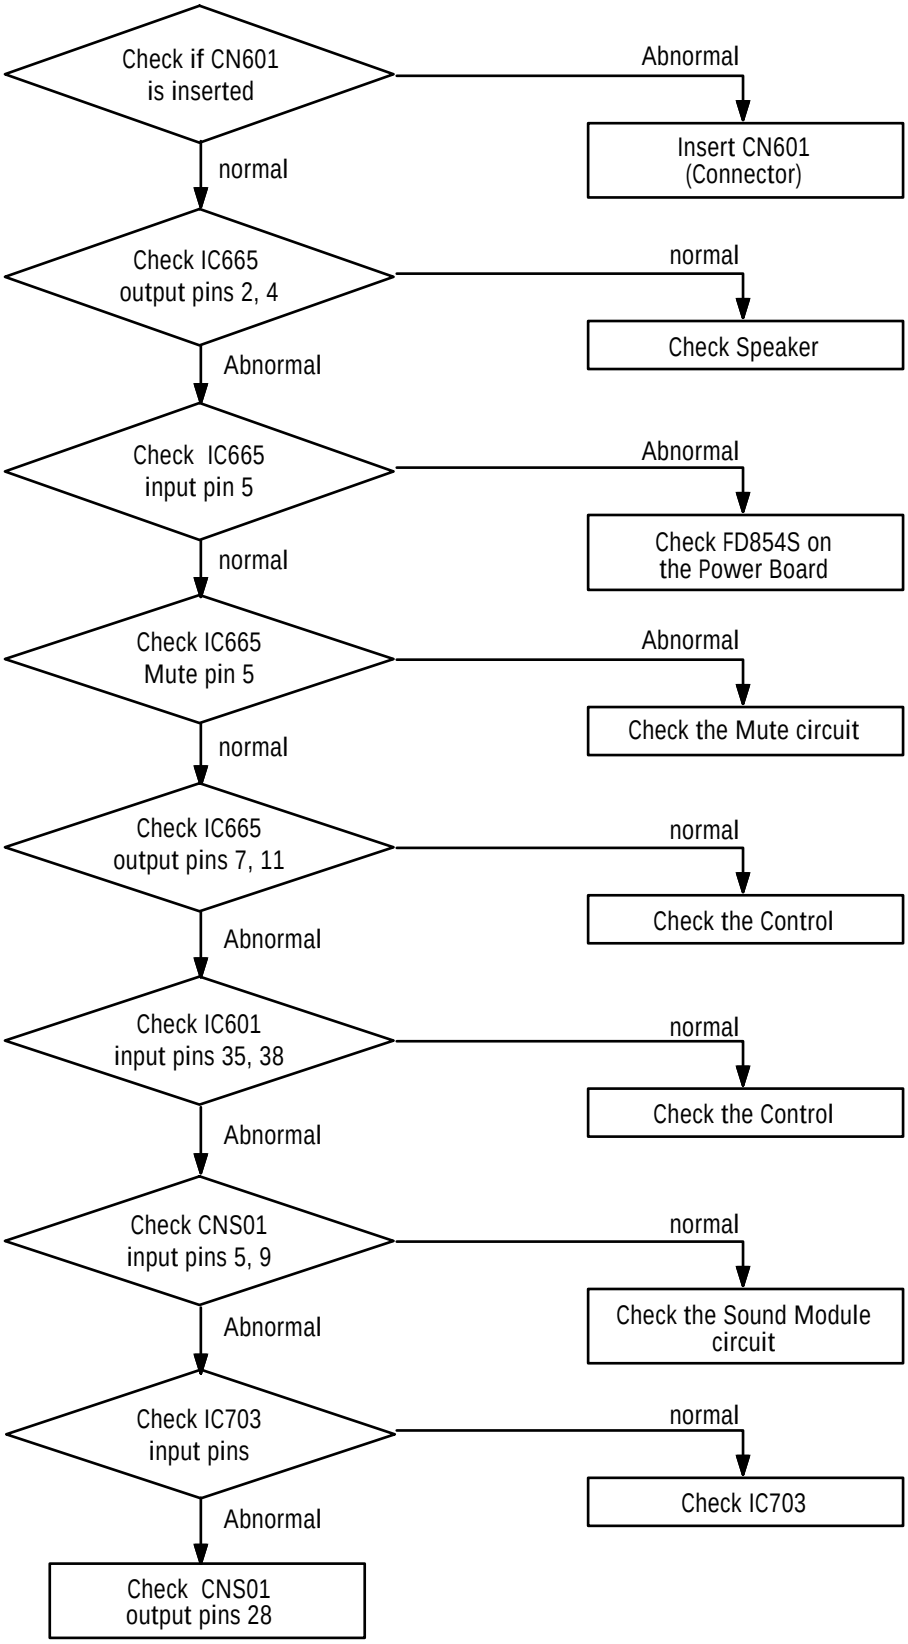
Check if CN601 is inserted
Abnormal
Insert CN601 (Connector)
normal
Check IC665 output pins 2, 4
normal
Check Speaker
Abnormal
Check IC665 input pin 5
Abnormal
Check FD854S on the Power Board
normal
Check IC665 Mute pin 5
Abnormal
Check the Mute circuit
normal
Check IC665 output pins 7, 11
normal
Check the Control
Abnormal
Check IC601 input pins 35, 38
normal
Check the Control
Abnormal
Check CNS01 input pins 5, 9
normal
Check the Sound Module circuit
Abnormal
Check IC703 input pins
normal
Check IC703
Abnormal
Check CNS01 output pins 28

5-3 No Raster (Sound OK)

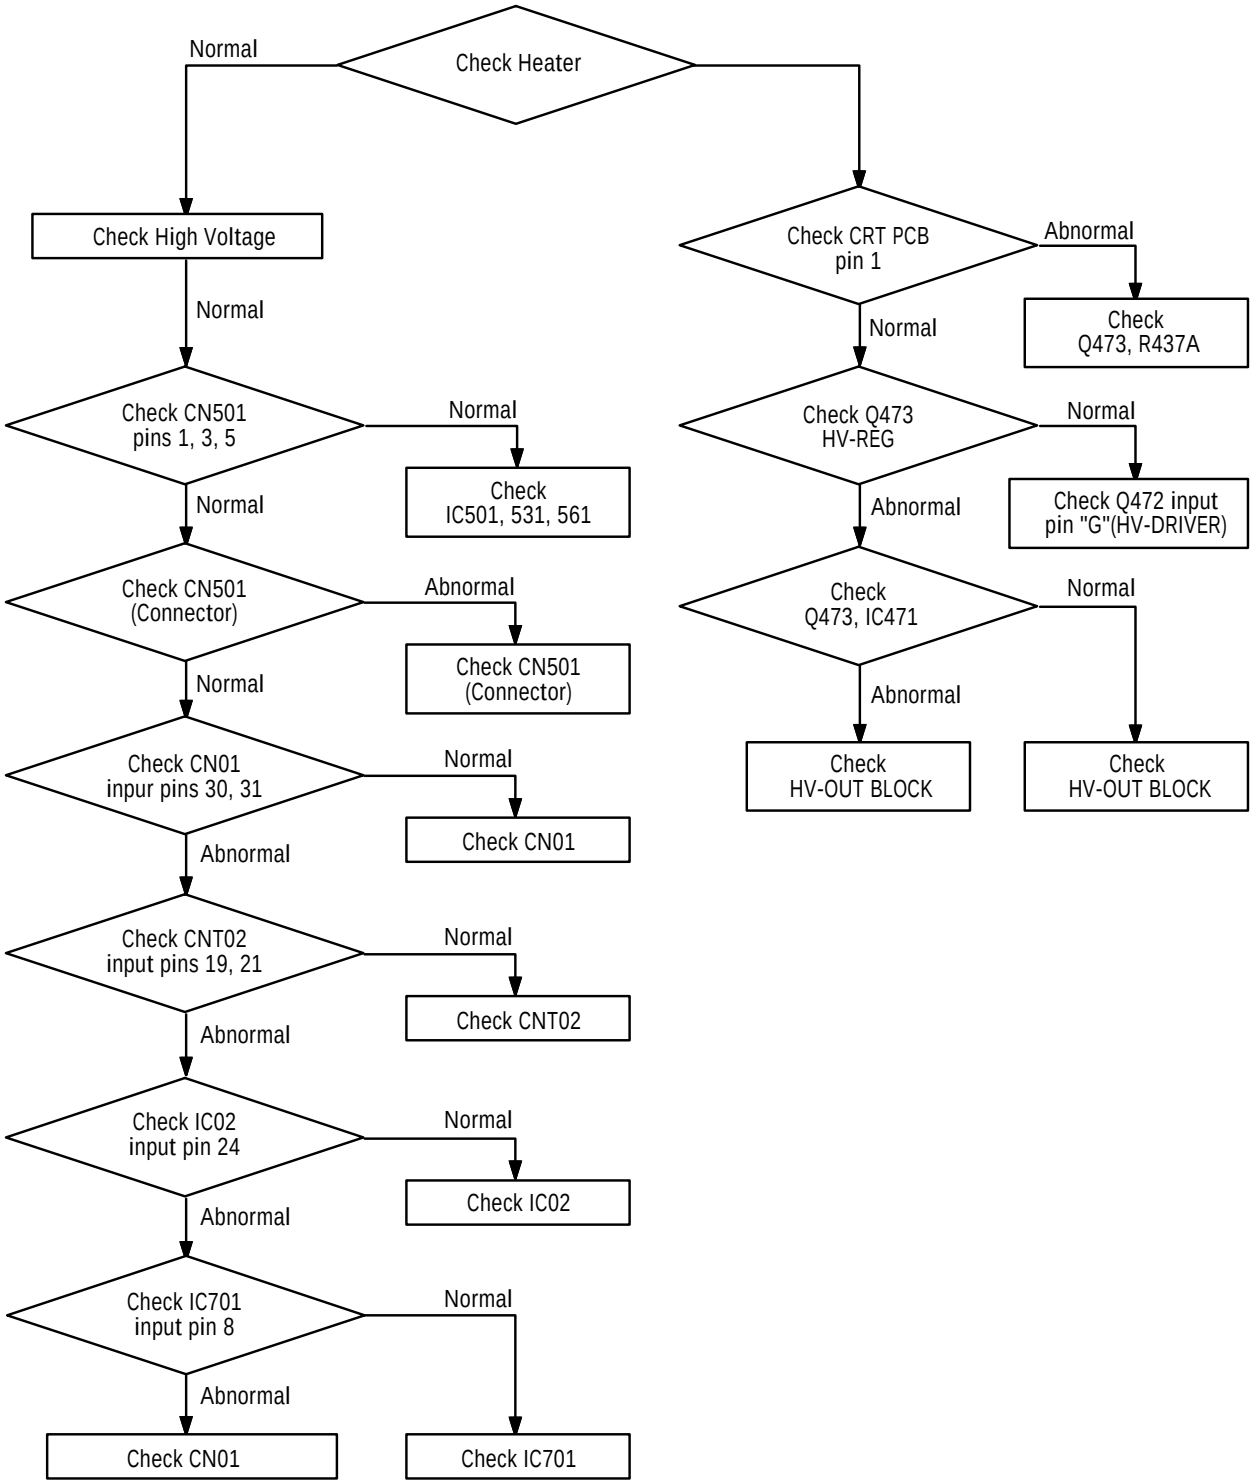

MEMO

6. Exploded View & Parts List

6-1 PCL545RX/XAA(PCL5415R3C/XAA)

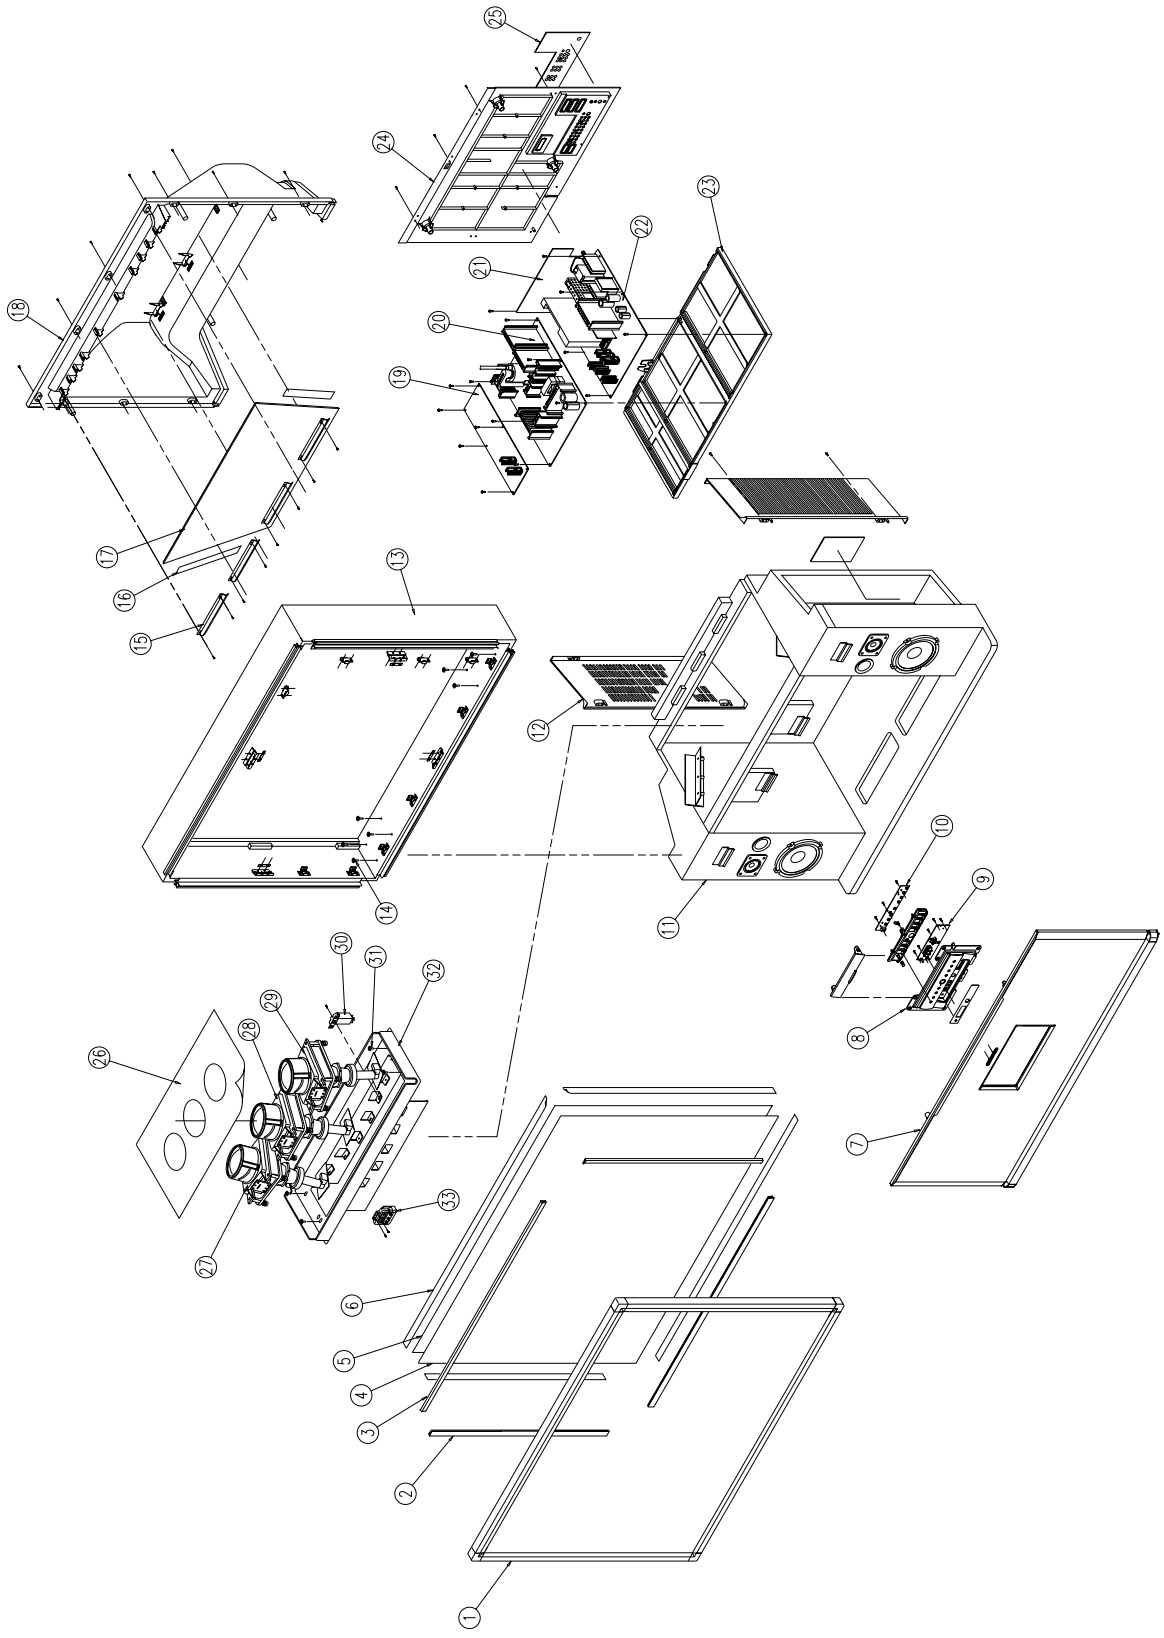

6-2 PCL545RX/XAA

No	Code No	Description	Specification	Q'ty	Remark
1	AA91-00654A	ASSY CABINET MASK;-,HB,GRAY,LG807P+BL903P SEA P54A			
2	AA60-00069C	SPACER-SCREEN;ABS,-,-,-,BLK,-,-,HB		2	
3	AA60-00069B	SPACER-SCREEN;ABS,-,-,-,BLK,-,-,HB		2	
4	AA67-00023A	SUN-SCREEN;-,53,H/C,A/S,PMMA,T=93%,T2.0,1125*854		1	
5	AA67-00116A	SCREEN-LENTI;-,53,-,PMMA,TINT=10%,T1.0,1125*854 B		1	
5	AA67-00116B	SCREEN-FRESNEL;-,53,-,T2.0,1125*854 B		1	
6	0203-001279	TAPE-OPP MASKING;#232,T0.14,W15,L50000,YEL		4(M)	
7	AA91-00653A	ASSY-FRONT,BOT;-,VO G4309,HIPS SP700N SEA		1	
8	AA91-00652A	ASSY-CONTROL;-,HB BLK,HIPS PCL545R SEA		1	
9	AA95-00998A	ASSY-PCB,A/V FRONT; -,PCL545R,P54A		1	
10	AA95-00961A	ASSY-PCB,CONTROL; -,PCL545R,P54A		1	
11	AA91-00475C	ASSY-WOOD,BOT;-,-,WOOD,PCL545R		1	
12	AA64-01385C	CABINET-BACK,SIDE;43,54,62J8,-,HIPS,V0,BLK		2	
13	AA91-00474C	ASSY-WOOD,TOP;-,-,WOOD,PCL545R		1	
14	6006-001094	SCREW-ASS'Y WOOD;WW,HH,+,M7,L32,ZPC(YEL),SWRCH18A		8	
15	AA91-00489B	ASSY-BRKT,MIRROR;-,-,SECC-1 T1.0,54J8		4	
16	AA63-60131F	SPACER-FELT;,FELT,-,-,-,BLK,T0.5,-,280X50		2	
17	AA67-00080A	MIRROR-BACK;54J8,GLASS,940*686*673(132)*3,-,-,T3.0		1	
18	AA64-01379B	CABINET-BACK,TOP;54J8,-,HIPS,HB,BLK		1	
19	AA95-00799A	ASSY-PCB, POWER; -, PCL545R,P54A		1	
20	AA95-00705A	ASSY-PCB, SUB; -,PCL545R,P54A		1	
21	AA95-00715B	ASSY-PCB, TERMINAL;-,PCL545R,P54A		1	
22	AA94-03388A	ASSY-PCB, MAIN; PCL545RX/XAA ,P54A		1	
23	AA61-00504B	HOLDER-CHASSIS;43,54,62J8,ABS,GRAY,VO,-,-		1	
24	AA64-01384B	CABINET-BACK,BOT;43,54,62J8,-,HIPS,VO,BLK		1	
25	AA64-01395G	INLAY-TERMINAL;J7,J8,PS SHEET,T0.5,-,BLK,-,P54A		1	
26	AA60-00072B	SPACER-COVER,DUST;43,53,61J8,FELT,V0		1	
27	AA94-03340A	ASSY CRT-(R);P16LSG03RJA,+380MG,7,BARE,PCL534R		1	
28	AA94-03341A	ASSY CRT-(G);P16LSG03HKA,+380MG,7,BARE,PCL534R		1	
29	AA94-03342A	ASSY CRT-(B);P16LSG03BMB,+380MG,7,BARE,PCL534R		1	
30	AA26-00101A	TRANS-FBT;-,FWZ-50A001E,50KV		1	
31	6006-001094	SCREW-ASS'Y WOOD;WW,HH,+,M7,L32,ZPC(YEL),SWRCH18A		4	
32	AA61-00475B	BRACKET-CRT,MAIN;54,SECC,T1.6,-,-		1	
33	AA59-00171A	MODULE-FOCUS,PACK; -,SVP-5200,S300-P3		1	

6-3 PCL5415R3C/XAA

No	Code No	Description	Specification	Q'ty	Remark
1	AA64-01915B	CABINET-MASK,ETC;DP,54J9,64-01393M,N,ABS		1	
2	AA60-00069C	SPACER-SCREEN;43,54.62J8,ABS,-,-,-,BLK,-		2	
3	AA60-00069B	SPACER-SCREEN;43,54,62J8,ABS,-,-,-,BLK,-		2	
4	AA67-00023A	SUN SCREEN,HC;-,53,H/C,A/S,PMMA,T=93%,T		1	
5	AA67-00116B	SCREEN-FRESNEL;53,-,T2,1125*854,-,-,-		1	
5	AA67-00116A	SCREEN-LENTI;53,-,T1,1123*852,-,-,TINT=1		1	
6	0203-001279	TAPE-OPP MASKING;#232,T0.14,W15,L50000,YEL		4(M)	
7	AA91-00660B	ASSY-FRONT,BOT;DP,91-00653B SEARS,54J9		1	
8	AA95-01068B	ASSY-CONTROL;DP,PCL545R,P54A,16.2KG		1	
9	AA41-00453A	PCB-AV FRONT;PCL545R,FR-1,1L,A,1.6T,330X		1	
10	AA41-00425A	PCB-CONTROL;SVP54J8SR,FR-1,1L,A,1.6T,245		1	
11	AA64-01402B	CABINET-WOOD,BOT;54J9,SDE8326R WOOD		1	
12	AA64-01385C	CABINET-BACK,SIDE;545R,625R(SEA),HIPS,V0		1	
13	AA64-01399B	CABINET-WOOD,TOP;54J9,SDE8326R,WOOD		1	
14	6006-001094	SCREW-ASS'Y WOOD;WW,HH,+,M7,L32,ZPC(YEL)		8	
15	AA91-00489B	ASSY-BRKT,MIRROR;-,-,SECC-1 T1.0,54J8		1	
16	AA63-60131A	SPACER-FELT;FELT,T0.5,BLK,80x70,SVP403J,		1	
17	AA67-00080A	MIRROR-BACK;54J8,GLASS,940*686*673(132)*		1	
18	AA64-01379B	CABINET-BACK,TOP;54J8,-,HIPS,HB,BLK		1	
19	AA95-00799A	ASSY PCB POWER;PCL545R,P54A,53		1	
20	AA95-00705A	ASSY-PCB,SUB;,PCL545R,P54A		1	
21	AA95-00716A	ASSY-PCB,TERMINAL;,PCL545R,P54A		1	
22	AA94-03388C	ASSY PCB MAIN(OPT);PCL5415R3C/XAA,P54A,U		1	
23	AA61-00504B	HOLDER-CHASSIS;43,54,62J8,ABS,GRAY,VO,-,		1	
24	AA64-01853A	CABINET-BACK,TOP;DP,54J8,AA64-01379B,HB		1	
25	AA64-01395L	INLAY-TERMINAL;J9,PS SHEET,T0.5,BLK,P54A		1	
26	AA60-00072B	SPACER-COVER,DUST;43,54,62J9,SPONGE 94HF		1	
27	AA97-01192A	ASSY CRT-(R);,+380MG,P16LSG03RJA,BARE,PC		1	
28	AA97-01193A	ASSY CRT-(G);,+380MG,P16LSG03HKA,BARE,PC		1	
29	AA97-01194A	ASSY CRT-(B);,+380MG,P16LSG03BMB,BARE,PC		1	
30	AA26-00100A	TRANS FBT;FFA97513L,CT29A7DR,0.3mH,-,-,-		1	
31	6006-001094	SCREW-ASS'Y WOOD;WW,HH,+,M7,L32,ZPC(YEL)		8	
32	AA61-00617A	BRACKET-CRT,MAIN;54J7,DP,-,-,AA61-00475B		1	
33	AA59-00171A	MODULE-FOCUS,PACK;SVP-5200,S300-P3,-,-,-		1	

6-4 HCL552WX/XAA(HCL5515WX/XAA)

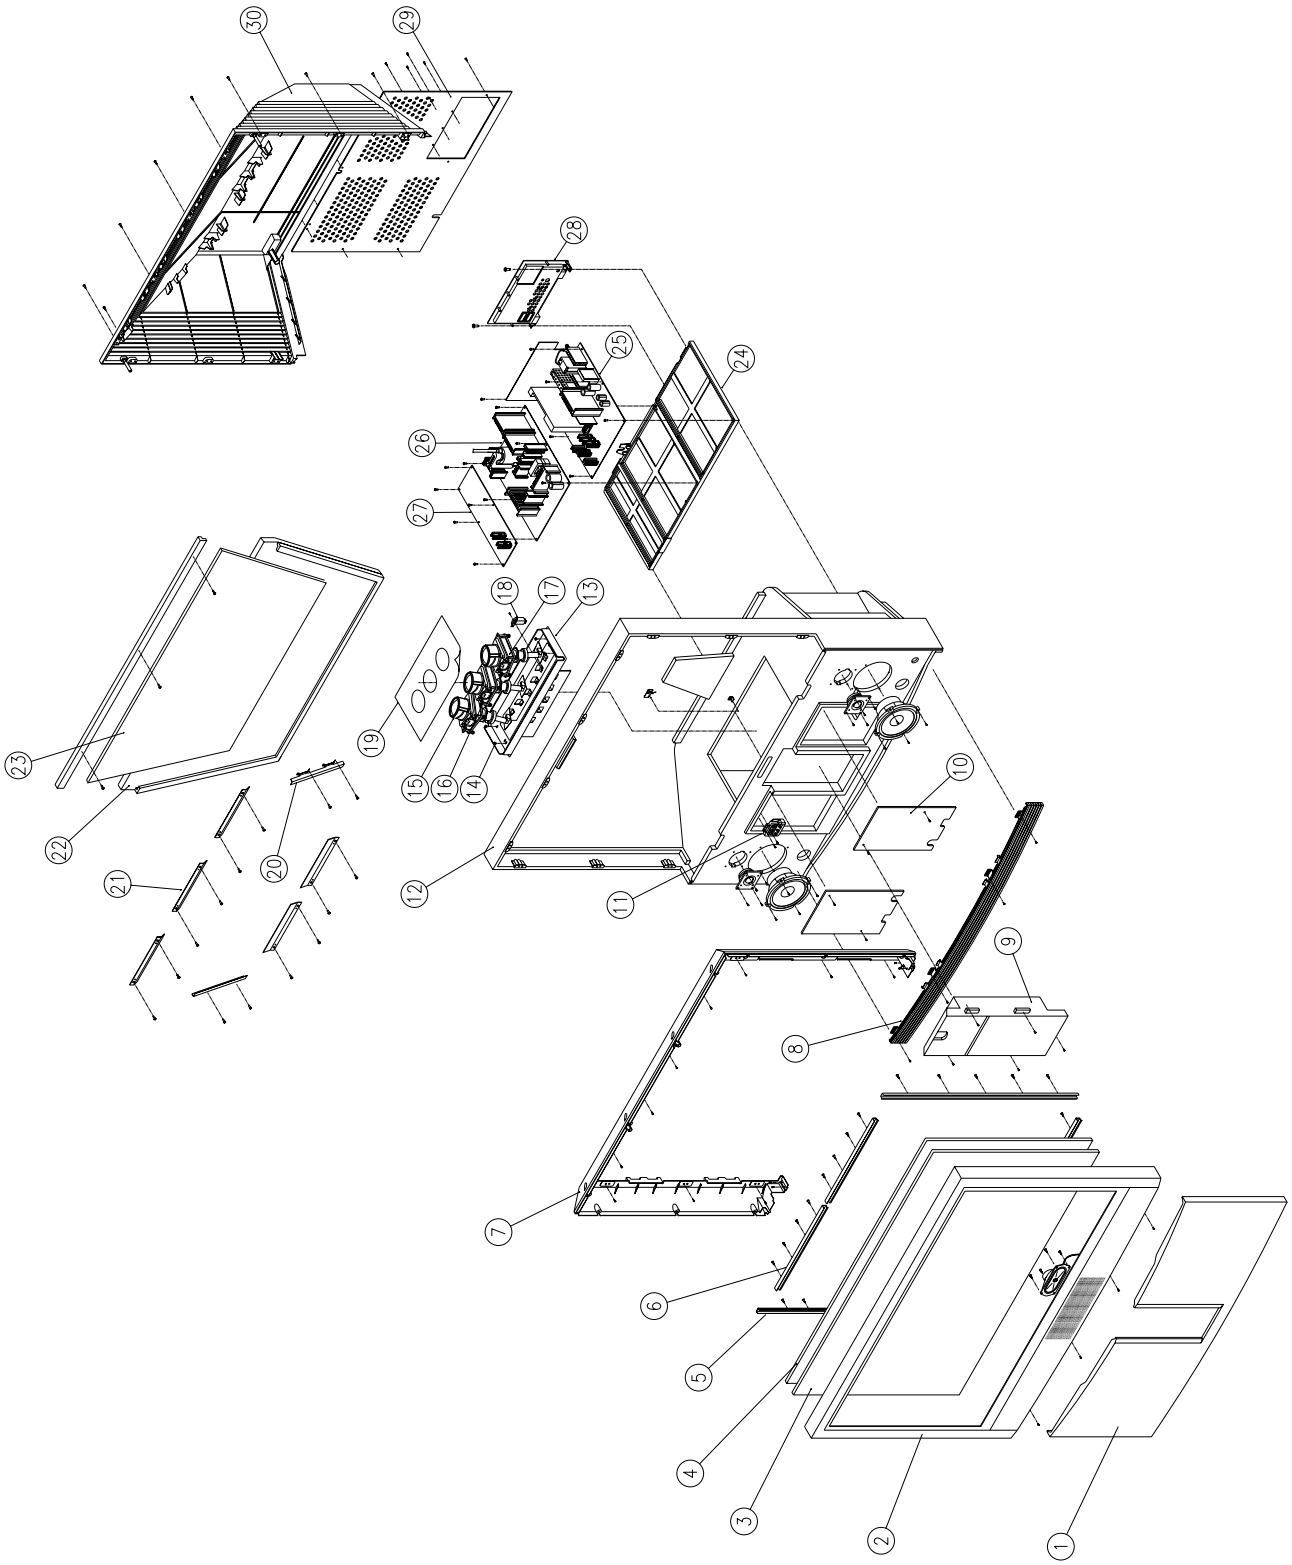

6-5 HCL552WX/XAA(HCL5515X/XAA)

No	Code No	Description	Specification	Q'ty	Remark
1	AA91-10404E	ASSY CABINET BOT;-,VO BLK,JERSEY SP700N		1	
2	AA91-10402K	ASSY CABINET FRONT;-,552W HDTV,(SPK)		1	
3	AA67-00053A	SUN-SCREEN;-,55W,H/C,A/S,PMMA,T=82%,T2.		1	
4	AA67-70055A	SCREEN;DNP,55W,-,-,TINT=10%,2.7,1251		1	
5	AA61-11024A	BRACKET-SCREEN,S;-,-,SECC-1,T1.0,-,-,-		2	
6	AA61-11023A	BRACKET-SCREEN,T;-,-,SECC-1,T1.0,-,-,-		4	
7	AA64-31316A	CABINET-MIDDLE;-,SPT555JHD,SV704P,HIPS,H		1	
8	AA64-80052A	LEG-FRONT;-,SPT555JHD,DG703P,HIPS,HB,BLK		1	
9	AA95-01155A	ASSY-DOOR;-,552W,652W,P54A,-,-,-		1	
10	AA63-30225A	COVER-WOOD;-,SPT-555JHD,-,WOOD,-,-,-,-		2	
11	AA59-00171A	MODULE-FOCUS,PACK;SVP-5200,S300-P3,BK,-		1	
12	AA91-00692A	ASSY-CABINET,WOOD;-,WOOD(R1),P54A,SDE8326		1	
13	AA61-00475B	BRACKET-CRT,MAIN;54,SECC,T1.6		1	
14	6006-001090	SCREW-ASS'Y TAPP;WW,HEX,M6,L28.0		4	
15	AA94-03599A	ASSY-CRT-(R);P16LNM07RJA,+380MG,55,-,-,B		1	
16	AA94-03600A	ASSY-CRT-(G);P16LNM07HKA,+380MG,55,-,-,B		1	
17	AA94-03601A	ASSY-CRT-(B);P16LNM07BMB,+380MG,55,-,-,B		1	
18	AA26-00101A	TRANS FBT;FWZ50A001E,-,-,		1	
19	AA60-00072B	SPACER-COVER,DUST;SPONGE,94HF-1		1	
20	AA61-11022A	BRACKET-MIRROR,S;-,-,SECC-1,T1.0,-,-,-		2	
21	AA61-11021A	BRACKET-MIRROR,T;-,-,SECC-1,T1.0,-,-,-		5	
22	AA64-31259A	CASE-MIRROR;-,SPT-555JHD,-,WOOD,-,-,-,-		1	
23	AA67-20028A	MIRROR-FRONT;55'W,GLASS,T=3.0,-,FSM,1074		1	
24	AA61-00051B	HOLDER-CHASSIS;-,ABS,V0,GRY,-		1	
25	AA94-03388A	ASSY PCB MAIN(OPT);PCL534R,P54A,-,-		1	
26	AA95-00705A	ASSY-PCB,SUB;PCL545R,P54A		1	
27	AA95-00799A	ASSY PCB POWER;PCL545R,P54A,53		1	
28	AA91-00594B	ASSY TERMINAL BOARD;-,HIPS,V0,BLK,P54A		1	
29	AA64-00624A	CABINET-BACK,BOARD;-,HARDBOARD,HIPS,V0,BLK		1	
30	AA64-31213B	CABINET-BACK-TOP;-,555J,-,HIPS,HB,BLK,-,		1	

6-6 HCL652WX/XAA(HCL6515WX/XAA)

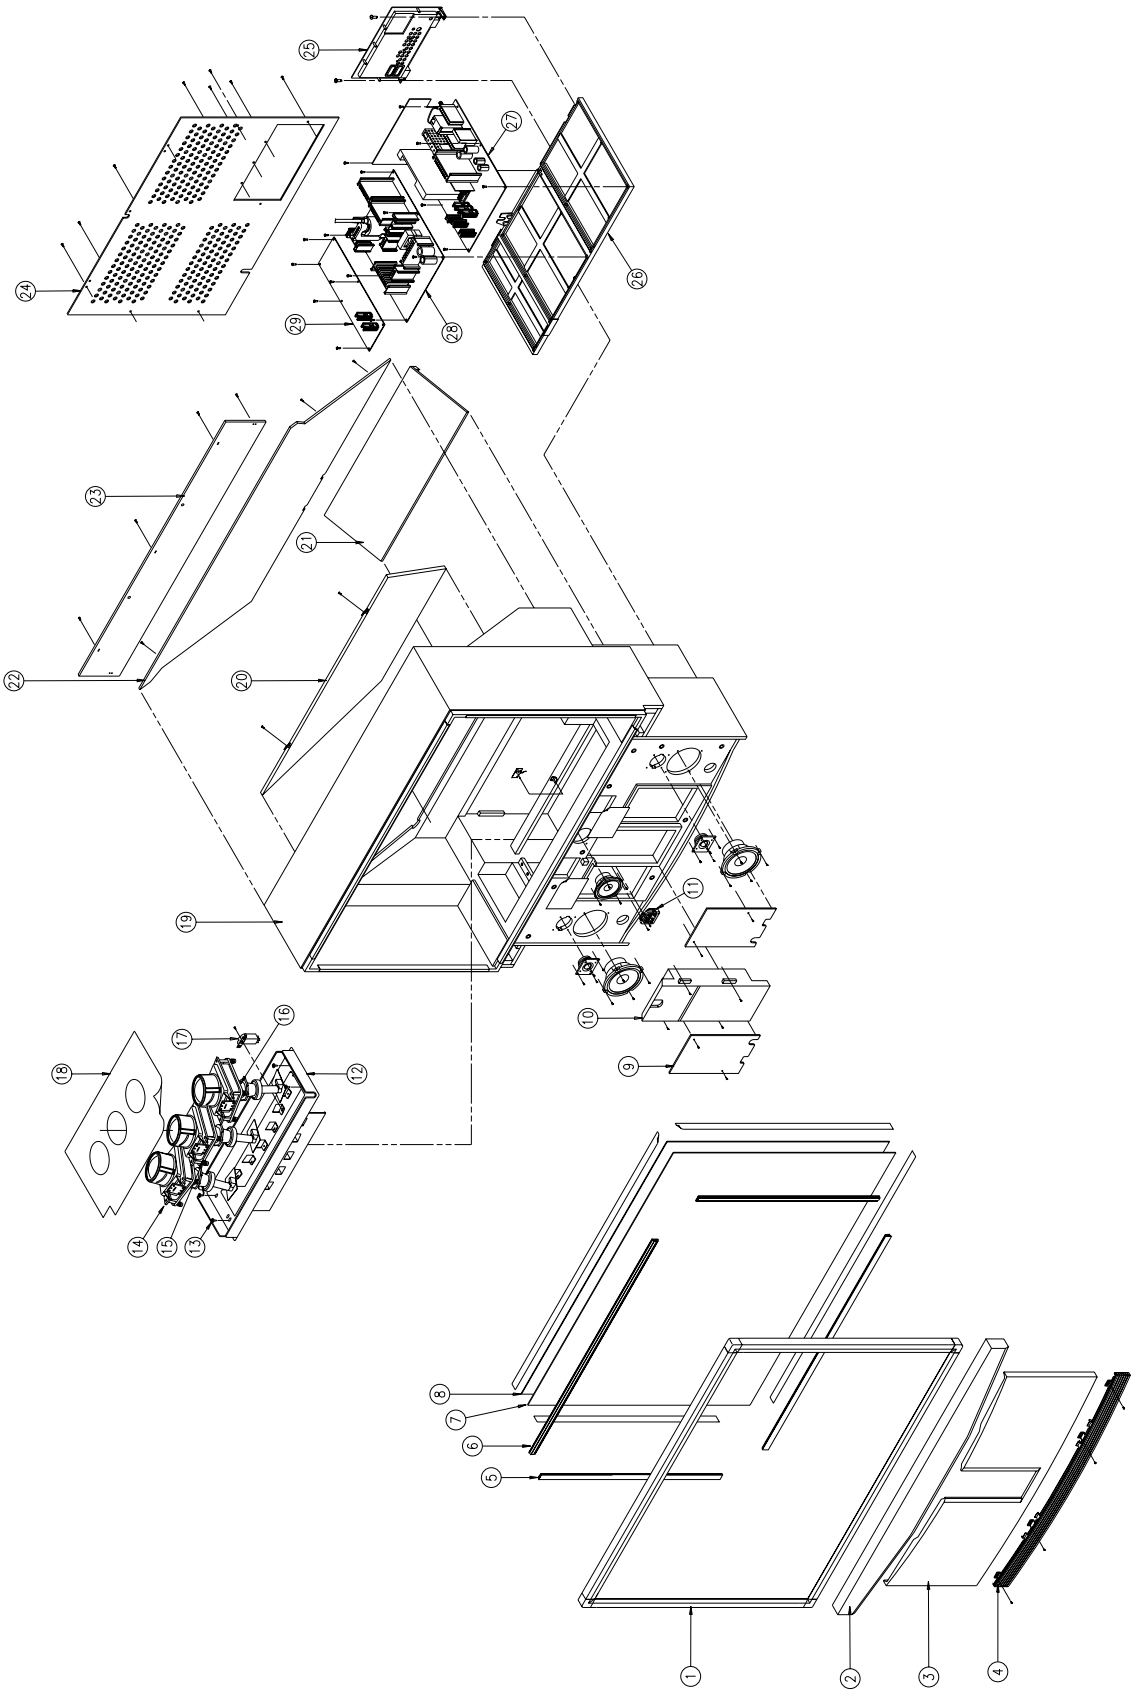

6-7 HCL652WX/XAA(HCL6515X/XAA)

No	Code No	Description	Specification	Q'ty	Remark
1	AA91-00695A	ASSY CABINET MASK;-,HB,BLK,D902+B901 HDT		1	
2	AA91-00696A	ASSY-DECORATION,JERSEY;-,PS,HB,BLK,SP500G,JERSEY		1	
3	AA91-10404E	ASSY CABINET BOT;-,VO BLK,JERSEY SP700N		1	
4	AA64-80052A	LEG-FRONT;-,SPT555JHD,DG703P,HIPS,HB,BLK		1	
5	AA60-00069M	SPACER-SCREEN;ABS HB BLK L840		2	
6	AA60-00069H	SPACER-SCREEN;ABS HB BLK L1440		2	
7	AA67-00021A	SUN-SCREEN;-,65¢©W,H/C,A/S,PMMA,TRAN=82%		1	
8	AA67-00009A	SCREEN-TINT;-,65W,DNP,P=0.72,TINT=10%,3.		1	
9	AA63-30225A	COVER-WOOD;-,SPT-555JHD,-,WOOD,-,-,-,-		2	
10	AA95-01155A	ASSY-DOOR;-,552W,652W,P54A,-,-,-		1	
11	AA59-00171A	MODULE-FOCUS,PACK;SVP-5200,S300-P3,BK,-		1	
12	AA61-00475B	BRACKET-CRT,MAIN;54,SECC,T1.6		1	
13	6006-001090	SCREW-ASS'Y TAPP;WW,HEX,M6,L28.0		4	
14	AA94-03599A	ASSY-CRT-(R);P16LNM07RJA,+380MG,55,-,-,B		1	
15	AA94-03600A	ASSY-CRT-(G);P16LNM07HKA,+380MG,55,-,-,B		1	
16	AA94-03601A	ASSY-CRT-(B);P16LNM07BMB,+380MG,55,-,-,B		1	
17	AA26-00101A	TRANS FBT;FWZ50A001E,-,-,		1	
18	AA60-00113A	SPACER-COVER,DUST;SPONGE,94HF-1		1	
19	AA91-00694A	ASSY-CABINET,WOOD;-,WOOD(R1),P54A,SDE8326		1	
20	AA67-00052A	MIRROR-FRONT;65W,GLASS,T3.0,FSM,-,1210*		1	
21	AA63-00465A	COVER-DUST;-,HCL652W,-,WOOD,-,BLK,-,-		1	
22	AA63-00109A	COVER-MIRROR;-,HCJ655W,-,WOOD,-,BLK,-,-		1	
23	AA63-00464A	COVER-BACK,TOP;-,HCL652W,-,WOOD,-,BLK,-,		1	
24	AA64-00623A	CABINET-BACK,BOARD;-,HCL652W,-,PS,V0,,-,BLK		1	
25	AA91-00594B	ASSY TERMINAL BOARD;-,HIPS,V0,BLK,P54A		1	
26	AA61-00051B	HOLDER-CHASSIS;-,ABS,V0,GRY,-		1	
27	AA94-03388A	ASSY PCB MAIN(OPT);PCL534R,P54A,-,-		1	
28	AA95-00705A	ASSY-PCB,SUB;PCL545R,P54A		1	
29	AA95-00799A	ASSY PCB POWER;PCL545R,P54A,53		1	

MENO

7. Electrical Parts List

7-1 PCL545RX/XAA

Loc. No.	Code No.	Description ; Specification	Remark

ASSY-PCB,INTERFACE

1		*AA95-00968A	ASSY-PCB,INTERFACE;,PCL545R,P54A	
..2	CN05	3711-003641	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
..2	CN09	3711-002646	CONNECTOR-HEADER;BOX,7P,1R,2.5mm,STRAIGH	
..2	CNW09	AA39-20029L	LEAD CONNECTOR ASSY;,7P,67096-007,S,800M	
..2	IC01	1201-000229	IC-OP AMP;324,DIP,14P,300MIL,QUAD,100V/m	
..2	IC02	1002-001256	IC-A/D CONVERTER;AD7823YN,8Bits,DIP,8P,2	
..2	IC03	1203-001006	IC-VOLTAGE REGULATOR;78R05,TO-220F,4P,-,	
..2	PCB	AA41-00397B	PCB-AUTO CONVERGENCE;PCL545R,FR-1,1L,B,1	
..2		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
..2		3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
..2		AA99-20088U	ASSY-PCB SUB,AUTO; AA95-00968A ,V	S.N.A
...3	C01	2201-000949	C-CERAMIC,DISC;0.005nF,0.5pF,50V,UJ,TP,4	
...3	C02	2201-000949	C-CERAMIC,DISC;0.005nF,0.5pF,50V,UJ,TP,4	
...3	C03	2201-000949	C-CERAMIC,DISC;0.005nF,0.5pF,50V,UJ,TP,4	
...3	C04	2201-000949	C-CERAMIC,DISC;0.005nF,0.5pF,50V,UJ,TP,4	
...3	C05	2401-001495	C-AL;47uF,20%,16V,GP,TP,5x11,5	
...3	C06	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
...3	C07	2301-000289	C-FILM,PEF;5.6nF,5%,50V,TP,7x6x3,5	
...3	C08	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
...3	C10	2401-000914	C-AL;22uF,20%,16V,GP,TP,5x11,5	
...3	C11	2401-001495	C-AL;47uF,20%,16V,GP,TP,5x11,5	
...3	C12	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
...3	C13	2401-001495	C-AL;47uF,20%,16V,GP,TP,5x11,5	
...3	C14	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
...3	C15	2401-000287	C-AL;100uF,20%,16V,WT,TP,6.3x11,5	
...3	C16	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
...3	D05	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3	DZ01	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3	DZ02	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3	DZ03	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3	DZ04	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3	DZ05	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3	DZ06	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3	DZ07	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3	DZ08	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3	DZ09	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
...3	DZ10	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3	DZ11	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3	DZ12	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3	DZ13	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3	EF01	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3	EF02	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3	EF03	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3	EF04	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3	EF05	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3	EF06	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3	EF07	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3	EF08	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3	EF09	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3	EF10	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3	EF11	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3	EF12	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3	L01	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
...3	Q05	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3	R13	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	R14	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	R15	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	R16	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	R17	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R18	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R19	2001-000645	R-CARBON;330KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	R20	2001-000645	R-CARBON;330KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	R21	2001-000645	R-CARBON;330KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	R22	2001-000645	R-CARBON;330KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	R23	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R24	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R25	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R26	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R27	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R30	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R31	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R32	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	R33	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	R34	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
...3	R35	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R36	2001-000210	R-CARBON;0ohm,5%,1/8W,AA,TP,1.8x3.2mm	
...3	R37	2001-000302	R-CARBON;10OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R38	2001-000302	R-CARBON;10OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R40	2001-000605	R-CARBON;3.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	R41	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R42	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	

ASSY PCB POWER

1		*AA95-00799A	ASSY PCB POWER;PCL545R,P54A,53	
..2	C812	2401-000701	C-AL;2200uF,20%,250V,GP,-,35x70mm,1	
..2	C813	2401-000701	C-AL;2200uF,20%,250V,GP,-,35x70mm,1	
..2	C831	2306-000323	C-FILM,MPPF;2.2nF,5%,1.6KV,TP,28.5x15.5x	
..2	C862	2401-003076	C-AL;3300uF,20%,50V,WP,BK,18x35.5mm	
..2	C865	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
..2	C868	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
..2	C875	2401-002251	C-AL;470uF,20%,200V,GP,BK,25x40mm,1	
..2	CN802	AA39-00116A	LEAD CONNECTOR-ASSY;,12P,YBNH250-12,3515	
..2	CN803	AA39-00116A	LEAD CONNECTOR-ASSY;,12P,YBNH250-12,3515	
..2	CX801S	2306-000112	C-FILM,MPPF;100nF,20%,250V,BK,-,15mm	
..2	CX802S	2306-000112	C-FILM,MPPF;100nF,20%,250V,BK,-,15mm	
..2	CY801S	2201-000987	C-CERAMIC,DISC;2.2nF,20%,400V,Y5U,TP,12.	
..2	CY802S	2201-000987	C-CERAMIC,DISC;2.2nF,20%,400V,Y5U,TP,12.	
..2	D801S	AA96-50310A	ASSY-H/S;-,POWER,AA62-30150C,RBV606,-	
...3		AA62-30150C	HEAT SINK-ES;-,A6063 EXTR,-,WHT,40(24.5)	
...3		AA60-30003A	WASHER;-,-,-,T1.5,-,SBHG-1,-	
...3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...3		0402-000549	DIODE-BRIDGE;RBV606,600V,6A,-,BK	
...3		0205-000129	GREASE-SILICON;SC102,JAPAN	
..2	D810	0402-000250	DIODE-RECTIFIER;RG4C,1000V,1A,-	
..2	D854	AA96-50153C	ASSY-H/S;-,-,AA62-30013D,FLM-G12S,-	
...3		0402-000233	DIODE-RECTIFIER;FML-G12S,200V,5A,-,-	
...3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...3		AA62-30013D	HEAT SINK-ES;-,A6063 EXTR,-,-,55(21) T02	
..2	D855	AA96-50153C	ASSY-H/S;-,-,AA62-30013D,FLM-G12S,-	
..2	D856	AA96-50153C	ASSY-H/S;-,-,AA62-30013D,FLM-G12S,-	
..2	D857	AA96-50153C	ASSY-H/S;-,-,AA62-30013D,FLM-G12S,-	
..2	D858	AA96-50153C	ASSY-H/S;-,-,AA62-30013D,FLM-G12S,-	
..2	D859	AA96-50153A	ASSY-H/S;-,TR,AA62-30013D,FMG-26S,-	
...3		0402-000231	DIODE-RECTIFIER;FMG-G26S,600V,4A,TO-220F	
...3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...3		AA62-30013D	HEAT SINK-ES;-,A6063 EXTR,-,-,55(21) T02	
..2	FD802S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
..2	FD804S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
..2	FD855S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
..2	FP801S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
..2	IC801S	AA96-00035A	ASSY-H/S;-,POWER,AA62-30181P,STR-F6656,	
...3		0205-000129	GREASE-SILICON;SC102,JAPAN	
...3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...3		AA13-00018A	IC-HYBRID;-,STR-F6656,LF1351,5PIN,-,-	
...3		AA62-30181P	HEAT-SINK,ES;-,-,T1.0,WHITE,SCREW-HOLE(2	
..2	IC804	1203-001400	IC-POWER PRESCALER;SE110N,T0-220(SIP),3P	

Loc. No.	Code No.	Description ; Specification	Remark
..2 LX801S	AA29-30002L	FILTER-LINE NOISE;-,10mHMIN,5A,AC90~260V	
..2 LX802S	AA29-30002M	FILTER-LINE NOISE;-,1mHMIN,5A,AC90~260V,	
..2 LX803S	AA29-30002M	FILTER-LINE NOISE;-,1mHMIN,5A,AC90~260V,	
..2 NT801S	1404-001195	THERMISTOR-NTC;5.1ohm,15%,2900,27mW/C,BK	
..2 PC801S	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4,ST	
..2 PCB	AA41-00342A	PCB-POWER;PCL545R,CEM-1,1L,A,1.6T,330X24	
..2 R817	2009-001096	R-METAL PLATE;0.07ohm,5%,5W,CL,BK,5x14x1	
..2 R841	2008-001096	R-FUSIBLE(S);3.3OHM,5%,1/2W,AC,BK,2.5X6.	
..2 T801S	AA26-00099A	TRANS SWITCHING;EER5345,PCL544R,AC220V,1	
..2	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
..2	AA99-20081T	ASSY-PCB SUB,AUTO; AA95-00799A ,V	S.N.A
...3 C809	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
...3 C814	2201-002041	C-CERAMIC,DISC;0.82nF,10%,2kV,Y5P,TP,9x5	
...3 C815	2201-000406	C-CERAMIC,DISC;0.27nF,10%,2kV,Y5P,TP,6.3	
...3 C816	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
...3 C817	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
...3 C818	2301-001216	C-FILM,PPF;47nF,5%,630V,TP,20x14.5x22,7.	
...3 C819	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
...3 C833	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
...3 C834	2401-003028	C-AL;100uF,20%,25V,WT,TP,6.3x11,5	
...3 C851	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
...3 C852	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
...3 C853	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
...3 C854	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
...3 C855	2401-000703	C-AL;2200uF,20%,25V,GP,-,12.5x25mm,	
...3 C861	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
...3 C864	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
...3 C871	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
...3 C872	2401-000703	C-AL;2200uF,20%,25V,GP,-,12.5x25mm,	
...3 C874	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
...3 C877	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
...3 D834	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3 D843	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3 D851	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
...3 D853	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
...3 DZ858	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
...3 F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
...3 F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
...3 F802A	3602-000114	FUSE-HOLDER;-,-,30mohm	
...3 F802B	3602-000114	FUSE-HOLDER;-,-,30mohm	
...3 F804A	3602-000114	FUSE-HOLDER;-,-,30mohm	
...3 F804B	3602-000114	FUSE-HOLDER;-,-,30mohm	
...3 F855A	3602-000114	FUSE-HOLDER;-,-,30mohm	
...3 F855B	3602-000114	FUSE-HOLDER;-,-,30mohm	
...3 FD805S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
...3 FD806S	3601-001065	FUSE-AXIAL LEAD;125V,3.5A,FAST-ACTING,CE	
...3 FD854S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
...3 FD871S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
...3 L806	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 L807	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 L808	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
...3 L810	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 L811	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 L812	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 L813	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 L814	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
...3 L815	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 L816	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 L831	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
...3 L832	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
...3 L851	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 L857	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 L859	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 Q801	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 R808	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R808A	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R812	2003-002170	R-METAL OXIDE(S);15Kohm,5%,2W,AG,TP,3.9x	
...3 R814	2003-002170	R-METAL OXIDE(S);15Kohm,5%,2W,AG,TP,3.9x	
...3 R815	2003-000512	R-METAL OXIDE(S);15Kohm,5%,3W,AA,TP,6x16	
...3 R815A	2003-000512	R-METAL OXIDE(S);15Kohm,5%,3W,AA,TP,6x16	
...3 R832	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 R834	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R837	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R838	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R855	2001-001196	R-CARBON(S);9.1KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R871	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
...3 R872	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
...3 R873	2004-004366	R-METAL(S);1.3Kohm,1%,1/2W,AA,TP,2.5x6.5	
...3 R874	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R875	2004-004366	R-METAL(S);1.3Kohm,1%,1/2W,AA,TP,2.5x6.5	
...3 RP801S	2002-001010	R-COMPOSITION;1.8Mohm,5%,1/2W,AA,TP,3.7x	
...3 RX801S	2002-001011	R-COMPOSITION;3.3Mohm,5%,1/2W,AA,TP,3.7x	
...3 RY801S	2002-001013	R-COMPOSITION;4.7Mohm,5%,1/2W,AA,TP,3.7x	
...3 VP801S	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
...3 VX801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	

ASSY-PCB,TERMINAL

1	*AA95-00716A	ASSY-PCB,TERMINAL;,PCL545R,P54A	
..2 CNT01	3711-003630	CONNECTOR-HEADER;BOX,32P,2R,2.54mm,ANGLE	
..2 CNT02	3711-003630	CONNECTOR-HEADER;BOX,32P,2R,2.54mm,ANGLE	
..2 CNY01	3711-003601	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,ANGLE,	
..2 IC703	0904-001121	IC-I/O SUPPORT CHIP;8574,8BIT,DIP,16P,30	
..2 IC705	0801-000213	IC-CMOS LOGIC;4052,MULTIPLEXER,DIP,16P,3	
..2 ICD01	1204-001510	IC-SEPARATOR;EL4583CN,DIP,16P,-,PLASTIC,	
..2 ICD02	0801-000284	IC-CMOS LOGIC;4528,MULTIVIBRATOR,DIP,16P	
..2 ICD03	1204-001510	IC-SEPARATOR;EL4583CN,DIP,16P,-,PLASTIC,	
..2 JKV02	3722-001039	JACK-RCA;9P,3.4mm,SN,BLK,#16-22	
..2 JKV03	3722-001382	JACK-RCA;5P(9P),3.4MM,NI,R/W/G/BLUE,-	
..2 JKV04	3722-001382	JACK-RCA;5P(9P),3.4MM,NI,R/W/G/BLUE,-	
..2 JKV08	3722-000544	JACK-VHS;4P,11.5mm,AG,BLK,N	
..2 RD18	2001-000954	R-CARBON;750KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..2	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	
..2	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
..2	AA99-20091R	ASSY-PCB SUB,AUTO; AA95-00716A ,V	
...3 C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
...3 C702	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 C704	2203-000815	C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP,160	
...3 C705	2203-000815	C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP,160	
...3 C706	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C707	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C708	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C709	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C710	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C711	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C712	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 C713	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C714	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C715	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C716	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
...3 C717	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 C718	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C719	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C720	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C721	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C722	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C723	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 C724	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C727	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C730	2401-002299	C-AL;4.7uF,20%,50V,GP,TP,5x7,5	
...3 C731	2401-002299	C-AL;4.7uF,20%,50V,GP,TP,5x7,5	
...3 C732	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
...3 C733	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
...3 C734	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
...3 C735	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
...3 C736	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
...3 C737	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
...3 C738	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
...3 C739	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 C740	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
...3 C741	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 C760	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11,5	
...3 C761	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11,5	
...3 C762	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11,5	
...3 C763	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11,5	
...3 C764	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11,5	
...3 C765	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11,5	
...3 C766	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11,5	
...3 C767	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11,5	
...3 C768	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C769	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	

Loc. No.	Code No.	Description ; Specification	Remark
...3 C780	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
...3 CD01	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
...3 CD02	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD03	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
...3 CD04	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD05	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
...3 CD06	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
...3 CD07	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD08	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD09	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
...3 CD10	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
...3 CD11	2401-000404	C-AL;10uF,20%,16V,BP,TP,5x11,5	
...3 CD12	2401-000404	C-AL;10uF,20%,16V,BP,TP,5x11,5	
...3 CD13	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD14	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD15	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD16	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
...3 CD17	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
...3 CD18	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
...3 IC701	1001-001030	IC-VIDEO SWITCH;TDA6920X,-,SOP,28P,300MI	
...3 IC702	1001-001030	IC-VIDEO SWITCH;TDA6920X,-,SOP,28P,300MI	
...3 L701	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 L702	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 L711	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 L720	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 L721	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 L722	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 L723	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 L724	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 L725	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 L726	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 LD01	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 LD02	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 LD04	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 PCB	AA41-00343A	PCB-TERMINAL;PCL545R,FR-4,2L,A,1.6T,180X	
...3 Q701	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
...3 Q702	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
...3 Q703	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
...3 Q704	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
...3 Q705	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
...3 Q706	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
...3 Q707	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
...3 Q711	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
...3 Q712	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
...3 Q714	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
...3 QD01	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD02	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD03	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD04	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 R701	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R702	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R703	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R704	2007-001157	R-CHIP;750ohm,5%,1/16W,DA,TP,1608	
...3 R705	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R706	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R707	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
...3 R708	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R709	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R710	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R712	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R713	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R714	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R715	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R716	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R717	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R718	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R719	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R720	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R721	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R722	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R723	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R724	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R725	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R726	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R727	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R728	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R729	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R734	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
...3 R735	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
...3 R740	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R741	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R742	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R743	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R744	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R745	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R748	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
...3 R749	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
...3 R750	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
...3 R751	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
...3 R752	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
...3 R753	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
...3 R754	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
...3 R755	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
...3 R756	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
...3 R757	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
...3 R758	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
...3 R759	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
...3 R760	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R761	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
...3 R762	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R763	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R764	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
...3 R765	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R766	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R767	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R768	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R769	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R774	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R775	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 R776	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R777	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R779	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R780	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R788	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R791	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R792	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R793	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R794	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R795	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 R796	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 R797	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 R820	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 R821	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 R829	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R830	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 RD01	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
...3 RD02	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
...3 RD03	2007-000094	R-CHIP;22Kohm,5%,1/16W,DA,TP,1608	
...3 RD04	2007-000096	R-CHIP;30Kohm,5%,1/16W,DA,TP,1608	
...3 RD05	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RD06	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
...3 RD07	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
...3 RD08	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
...3 RD09	2007-000087	R-CHIP;6.8Kohm,5%,1/16W,DA,TP,1608	
...3 RD11	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
...3 RD12	2007-000913	R-CHIP;43Kohm,5%,1/16W,DA,TP,1608	
...3 RD13	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
...3 RD14	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
...3 RD15	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
...3 RD16	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
...3 RD17	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
...3 RD19	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
...3 RD20	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
...3 RD21	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RN701	2011-000160	R-NETWORK;10Kohm,5%,1/8W,A,SIP,9P,TP	
...3 RP784	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 RY701	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 RY702	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 RY703	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark

ASSY-PCB,V/M

1	*AA95-00714A	ASSY-PCB,V/M;,PCL545R,P54A	
..2 CNZ101	AA39-20055E	LEAD CONNECTOR-ASSY;,6P,YBNH025-06,67096	
..2 PCB	AA41-00344A	PCB-VM;PCL545R,FR-1,1L,A,1.6T,245X245	
..2 QZ101	AA96-50162F	ASSY-H/S;-,POWER,AA62-30013E,2SA1011,30	
...3	0502-000131	TR-POWER;2SA1011-D,PNP,1.2W,TO-220,-,60	
...3	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...3	AA62-30013E	HEAT-SINK,ES;-,A6063 EXTR,-,-,30(21) T02	
..2 QZ102	AA96-50162G	ASSY-H/S;-,AMP,AA62-30013E,2SC2344,30MM	
...3	0502-000153	TR-POWER;2SC2344-D,NPN,1.2W,TO-220,-,60	
...3	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...3	AA62-30013E	HEAT-SINK,ES;-,A6063 EXTR,-,-,30(21) T02	
..2 RZ120	2008-001097	R-FUSIBLE(S);33OHM,5%,1/2W,AC,BK,2.5X6.5	
..2	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
..2	AA99-20080N	ASSY-PCB SUB,AUTO; AA95-00714A ,V	S.N.A
...3 CNZ102	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,STRAIGH	
...3 CNZ103	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,STRAIGH	
...3 CNZ104	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,STRAIGH	
...3 CZ101	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
...3 CZ102	2401-001157	C-AL;33uF,20%,160V,GP,TP,12.5x20,5	
...3 CZ103	2201-000516	C-CERAMIC,DISC;4.7nF,+100-0%,500V,Y5U,TP	
...3 CZ104	2201-000193	C-CERAMIC,DISC;0.01nF,0.25pF,50V,NP0,TP,	
...3 CZ105	2201-000516	C-CERAMIC,DISC;4.7nF,+100-0%,500V,Y5U,TP	
...3 CZ106	2201-000193	C-CERAMIC,DISC;0.01nF,0.25pF,50V,NP0,TP,	
...3 CZ107	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11,5	
...3 CZ108	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
...3 CZ109	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
...3 CZ110	2201-000604	C-CERAMIC,DISC;0.056nF,+100-0%,500V,SL,T	
...3 CZ111	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
...3 CZ112	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
...3 DZ101	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3 DZ102	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 DZ103	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3 DZ104	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3 DZ105	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 DZ106	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 LZ101	2701-000002	INDUCTOR-AXIAL;100uH,10%,4.2x9.8mm	
...3 QZ103	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
...3 QZ104	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 QZ105	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 QZ106	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 RFZ101	2008-001086	R-FUSIBLE(S);3.3ohm,5%,2W,AG,TP,3.9x12mm	
...3 RZ101	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RZ102	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RZ103	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
...3 RZ104	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RZ105	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RZ106	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RZ107	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ108	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RZ109	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RZ110	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RZ111	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
...3 RZ112	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
...3 RZ113	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
...3 RZ114	2003-000532	R-METAL OXIDE(S);18ohm,5%,2W,AF,TP,4x12m	
...3 RZ115	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ116	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ117	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RZ118	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RZ119	2001-000554	R-CARBON;270OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ121	2001-000666	R-CARBON;33OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ122	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
...3 RZ123	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
..2	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
..2	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
..2	AA33-00008A	MAGNET CONVERGENCE;JH92LTU-36A,7inchPRT,	

ASSY-PCB,SUB

1	*AA95-00705A	ASSY-PCB,SUB;,PCL545R,P54A	

Loc. No.	Code No.	Description ; Specification	Remark
..2 C432	2306-000267	C-FILM,MPPF;8.2nF,5%,1.6KV,TP,28.5x18.5x	
..2 C438	2306-000267	C-FILM,MPPF;8.2nF,5%,1.6KV,TP,28.5x18.5x	
..2 C445	2401-001622	C-AL;6.8uF,20%,50V,BP,TP,16x25mm,7.	
..2 C481	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
..2 C491	2306-000322	C-FILM,MPPF;12nF,5%,1.6KV,TP,29x20.5x13,	
..2 C876	2401-000787	C-AL;220uF,20%,160V,GP,TP,16x31.5mm	
..2 CN202	AA39-00116A	LEAD CONNECTOR-ASSY;,12P,YBNH250-12,3515	
..2 CN801	AA39-00180A	LEAD CONNECTOR ASSY;,14P,YBNH250-14,3515	
..2 CN802	3711-003974	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
..2 CN803	3711-003974	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
..2 CNW801	AA39-20061G	LEAD CONNECTOR-ASSY;,3P,YFH800-03,S,100M	
..2 CNZ02	AA39-00115A	LEAD CONNECTOR-ASSY;,10P,YBNH250-10,3515	
..2 CR430S	2301-001343	C-FILM,MPPF;3.9nF,5%,2kV,TP,29x9.5x16mm,	
..2 CR431S	2301-001343	C-FILM,MPPF;3.9nF,5%,2kV,TP,29x9.5x16mm,	
..2 CR436S	2306-000235	C-FILM,MPPF;560nF,5%,400V,TP,26*22.5*14,	
..2 CR471S	2301-001091	C-FILM,MPPF;470nF,5%,400V,TP,26x21.5x14.	
..2 CR473S	2306-000322	C-FILM,MPPF;12nF,5%,1.6KV,TP,29x20.5x13,	
..2 CR474S	2306-000326	C-FILM,MPPF;4.7nF,5%,1.6KV,TP,28.5x16x9m	
..2 CS803	2401-003370	C-AL;47uF,20%,450V,GP,BK,16X35.5,7.	
..2 CY811S	2201-000446	C-CERAMIC,DISC;3.3nF,20%,400V,Y5U,TP,15x	
..2 CY812S	2201-000446	C-CERAMIC,DISC;3.3nF,20%,400V,Y5U,TP,15x	
..2 D464	0402-000236	DIODE-RECTIFIER;GI824,400V,5A,-,TP	
..2 D811S	0402-000102	DIODE-BRIDGE;D2SB60,600V,1.5A,-	
..2 IC301	AA96-50406A	ASSY-H/S;-,-,AA62-30180K,LA7845,-	
...3	0205-000129	GREASE-SILICON;SC102,JAPAN	
...3	1204-000517	IC-VERTIVAL DEF.;LA7845,SIP,7P,-,PLASTIC	
...3	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...3	AA62-30180K	HEAT SINK-ES;-,A6063 EXTR,-,WHT,50/13,-,	
..2 IC421	1203-000165	IC-POSI.ADJUST REG.;78R12,TO-220,3P,-,-	
..2 IC430	1203-000162	IC-POSI.ADJUST REG.;317,TO-220,3P,-,PLAS	
..2 IC431	1201-000191	IC-OP AMP;4558,DIP,8P,300MIL,DUAL,20V/mV	
..2 IC471	1203-000610	IC-PWM CONTROLLER;494,DIP,16P,300MIL,PLA	
..2 ICS801	AA13-00024A	IC-HYBRID;-,TNY253P,-,8PIN,-,-	
..2 ICS807	AA96-00111P	ASSY H/S;-,MAIN,AA62-30013L,KA278RA05,F	
...3	1203-001978	IC-VOLTAGE REGULATOR;KA278RA05,TO-220F,4	
...3	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...3	AA62-30013L	HEATSINK-ES;-,-,-,-,44/22,-,WHT,-,-,-,-	
..2 ICZ103	AA96-00034A	ASSY-H/S;-,CONVERGENCE,AA62-30173D,STK3	
...3	0205-000129	GREASE-SILICON;SC102,JAPAN	
...3	1201-001225	IC-VIDEO AMP;392,SIP,22P,-,TRIPLE,-,PLAS	
...3	6003-001021	SCREW-TAPTITE;RH,+,B,M3,L15,ZPC(YEL),SWR	
...3	AA62-30173D	HEAT SINK-ES;-,-,T1.0,WHITE,SCREW-HOLE(2	
..2 ICZ104	AA96-00034A	ASSY-H/S;-,CONVERGENCE,AA62-30173D,STK3	
..2 L432	AA27-00095A	COIL HORIZ. WIDTH;-,600uH,YL9N 15x27.5 C	
..2 L434	AA27-00174A	COILHORIZ.WIDTH;600UH,600UH,SB-5SOS6X20,	
..2 L435	AA27-10001C	COIL-CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
..2 L482	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
..2 L494	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
..2 L854	AA27-10001C	COIL-CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
..2 L860	AA27-10001C	COIL-CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
..2 L862	AA27-10001C	COIL-CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
..2 L872	AA27-10001C	COIL-CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
..2 L874	AA27-10002L	COIL-CHOKE;-,24UH,K,-,2A,-,24UH-K,10X10M	
..2 LC431S	AA27-30003M	COIL-LINEARLITY;-,5uH,OWA14x15,USRC0.1x6	
..2 PC811S	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4,ST	
..2 PCB	AA41-00340B	PCB-SUB;PCL545R,CEM-1,1L,B,1.6T,330X24	
..2 Q353	0502-000442	TR-POWER;2SC4636RB,NPN,2W,TO-220,ST,10-	
..2 Q431	AA96-00033E	ASSY H/S;-,H-OUT,AA62-30173C,2SC5446, F	
...3	AA02-00007A	MICA;DPM-04,MICA,22x29x0.15mm	
...3	AA62-30173C	HEAT SINK-ES;-,-,T1.0,WHITE,SCREW-HOLE(2	
...3	AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,-,SBHG	
...3	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...3	0502-001175	TR-POWER;2SC5446,NPN,200000mW,TO-3PL,BK	
...3	0402-001296	DIODE-RECTIFIER;FMP-3FU,1.5KV,5A,TO-3PF,	
...3	0205-000129	GREASE-SILICON;SC102,JAPAN	
..2 Q433	AA96-50407A	ASSY-H/S;-,-,AA62-30154G,KSD73Y,-	
...3	0205-000129	GREASE-SILICON;SC102,JAPAN	
...3	0502-000298	TR-POWER;KSD73,NPN,30000mW,TO-220,TP,12	
...3	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...3	AA62-30154G	HEAT SINK-ES;-,A6063 EXTR,-,WHT,50/16,-,	
..2 Q441	AA96-50383F	ASSY-H/S;-,-,AA62-30180D,2SD921,-	
...3	0205-000129	GREASE-SILICON;SC102,JAPAN	
...3	0502-001104	TR-POWER;2SD921,NPN,80W,TO-3P,BK,700-	
...3	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...3	AA62-30180D	HEAT SINK-ES;-,A6063 EXTR.,2,WHT,50mm,-,	
..2 Q473	AA96-00037A	ASSY-H/S;-,-,AA62-30181N,2SC4125, IRFS6	
...3	0502-001100	TR-POWER;2SC4125,NPN,70W,TO-3PML,BK,8-	

Loc. No.	Code No.	Description ; Specification	Remark
...3	AA62-30181N	HEAT-SINK,ES;-,-,T1.0,WHITE,SCREW-HOLE(2	
...3	AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,-,SBHG	
...3	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...3	0505-001202	FET-SILICON;IRFS640A,N,200V,9.8A,0.18ohm	
...3	0205-000129	GREASE-SILICON;SC102,JAPAN	
..2 RL811S	3501-001053	RELAY-POWER;5Vdc,530mW,10A,1FormA,15mS,5	
..2 RL812S	3501-001040	RELAY-POWER;12VDC,500mW,10A,1FormA,15mS,	
..2 T431	AA26-50001U	TRANS-HORIZ.DRIVE;-,28mH,105uH,4uH,ER28x	
..2 T432	AA26-00012A	TRANS-DUMMY;-,1.3MH,EER4445,110V/7.6V/21	
..2 T433	AA26-00011A	TRANS-DUMMY;-,3.5MH,EE2834,-,BK	
..2 T444S	AA26-00100A	TRANS FBT;FFA97513L,CT29A7DR,0.3mH,-,-,-	
..2 T461	AA26-50001V	TRANS-HORIZ.DRIVE;-,6.0mH,113uH,4uH,EI19	
..2 T481	AA26-00091A	TRANS-HV-STORAGE;4mH,-,14P,830uH,180V,10	
..2 TS811S	AA26-00055B	TRANS SWITCHING;,HLK436W,AC80V,AC80~280V	
..2	AA65-30104B	CLAMP-WIRE;NYLON 66,V2,BLK,W2 Z5,ALL MOD	
..2	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
..2	AA99-20081X	ASSY-PCB SUB,AUTO; AA95-00705A ,V	S.N.A
...3 C301	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
...3 C302	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
...3 C303	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
...3 C304	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
...3 C305	2201-002022	C-CERAMIC,DISC;0.005nF,0.25pF,500V,NP0,T	
...3 C307	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
...3 C308	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
...3 C309	2305-000285	C-FILM,MPEF;220NF,5%,100V,TP,10.5X5.5X15	
...3 C311	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
...3 C351	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
...3 C352	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
...3 C353	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
...3 C354	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
...3 C355	2201-000991	C-CERAMIC,DISC;0.56nF,10%,2kV,Y5P,TP,7.5	
...3 C405	2201-000558	C-CERAMIC,DISC;0.47nF,10%,50V,Y5P,TP,5x3	
...3 C406	2201-000370	C-CERAMIC,DISC;0.22nF,10%,50V,Y5P,TP,4x3	
...3 C412	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
...3 C413	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
...3 C417	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
...3 C418	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
...3 C419	2201-000180	C-CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3,5	
...3 C426	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
...3 C427	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
...3 C428	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
...3 C429	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
...3 C437	2401-003114	C-AL;4.7uF,20%,250V,WT,TP,10x16,5	
...3 C450	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
...3 C451	2401-001160	C-AL;33uF,20%,160V,GP,-,16x35mm,7.5	
...3 C452	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
...3 C453	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
...3 C454	2401-001428	C-AL;470uF,20%,50V,GP,TP,10x20,5	
...3 C455	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
...3 C456	2401-001527	C-AL;47uF,20%,250V,HR,TP,13x25mm,5m	
...3 C457	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
...3 C458	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
...3 C459	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
...3 C460	2303-000331	C-FILM,PPF;4.7nF,5%,630V,TP,19.5x12x7,7.	
...3 C467	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
...3 C468	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
...3 C469	2201-000180	C-CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3,5	
...3 C472	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
...3 C476	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
...3 C477	2301-000213	C-FILM,PEF;220nF,5%,250V,TP,21.5x11,7.5	
...3 C478	2301-000020	C-FILM,PEF;27nF,5%,100V,TP,7.3x4x12.5mm,	
...3 C479	2301-000200	C-FILM,PEF;2.2nF,5%,200V,TP,11.0x6.0x9.0	
...3 C480	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
...3 C483	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
...3 C484	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
...3 C487	2305-000178	C-FILM,MPEF;10nF,5%,100V,TP,-,5mm	
...3 C488	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
...3 C489	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
...3 C490	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
...3 C492	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
...3 C857	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
...3 C866	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
...3 C869	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
...3 C873	2401-001998	C-AL;1000uF,20%,25V,GP,TP,10x20,5mm	
...3 CN401	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5MM,STRAIGH	
...3 CN403	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,STRAIGH	
...3 CR401S	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
...3 CR402S	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,	
...3 CR403S	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,	
...3 CS804	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
...3 CS805	2401-001101	C-AL;330uF,20%,16V,GP,TP,8x11.5,5	
...3 CS807	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
...3 CS808	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
...3 CS809	2201-000556	C-CERAMIC,DISC;0.47nF,10%,500V,Y5P,TP,5.	
...3 CS812	2201-002076	C-CERAMIC,DISC;0.068nF,5%,1kV,SL,TP,8x4m	
...3 CS813	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
...3 CS814	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
...3 CZ101	2401-001428	C-AL;470uF,20%,50V,GP,TP,10x20,5	
...3 CZ102	2401-001428	C-AL;470uF,20%,50V,GP,TP,10x20,5	
...3 CZ108	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
...3 CZ109	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
...3 CZ110	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
...3 CZ111	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
...3 CZ112	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
...3 CZ113	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
...3 CZ114	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
...3 CZ115	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
...3 CZ116	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
...3 CZ117	2201-000327	C-CERAMIC,DISC;2.2nF,10%,50V,Y5V,TP,6.5x	
...3 CZ118	2201-000327	C-CERAMIC,DISC;2.2nF,10%,50V,Y5V,TP,6.5x	
...3 CZ126	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
...3 CZ127	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
...3 CZ128	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
...3 CZ132	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
...3 CZ133	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
...3 CZ134	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
...3 CZ135	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
...3 CZ136	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
...3 CZ137	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
...3 CZ138	2201-000327	C-CERAMIC,DISC;2.2nF,10%,50V,Y5V,TP,6.5x	
...3 CZ139	2201-000327	C-CERAMIC,DISC;2.2nF,10%,50V,Y5V,TP,6.5x	
...3 CZ151	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
...3 CZ152	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
...3 CZ153	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
...3 CZ154	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
...3 CZ155	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
...3 CZ156	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
...3 D302	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3 D353	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 D384	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
...3 D385	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 D433	0402-000537	DIODE-RECTIFIER;RH1A,600V,0.6A,DO-204AC	
...3 D434	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3 D435	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
...3 D436	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 D440	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
...3 D441	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
...3 D442	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 D443	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 D444	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3 D445	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
...3 D451	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
...3 D453	0402-001286	DIODE-RECTIFIER;RP1H,2000V,.1A,-,TP	
...3 D472	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3 D474	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3 D477	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 D478	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 D479	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 D480	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
...3 D484	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
...3 D501	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
...3 DR401S	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 DR402S	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 DR404S	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
...3 DS805	0404-001056	DIODE-SCHOTTKY;RK16,60V,1.5A,DO-204AC,TP	
...3 DS807	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3 DS809	0404-001056	DIODE-SCHOTTKY;RK16,60V,1.5A,DO-204AC,TP	
...3 DZ301	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
...3 DZ304	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
...3 DZ305	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
...3 DZ306	0403-001330	DIODE-ZENER;MTZJ30A,26.99-28.39V,500mW,D	
...3 DZ307	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
...3 DZ386	0403-001316	DIODE-ZENER;MTZJ3.0A,2.85-3.07V,500mW,DO	
...3 DZ395	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	

Loc. No.	Code No.	Description ; Specification	Remark
...3 DZ400	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
...3 DZ413	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
...3 DZ473	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
...3 DZ474	0403-000734	DIODE-ZENER;TZP15B,15V,14.7-16.5V,1W,DO-	
...3 DZ481	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
...3 DZ482S	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
...3 DZ483	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
...3 DZ801	0406-001106	DIODE-TVS;P6KE300A,285/-/315V,600W,DO-20	
...3 DZ802	0406-001106	DIODE-TVS;P6KE300A,285/-/315V,600W,DO-20	
...3 DZ803	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
...3 DZ804	0403-000716	DIODE-ZENER;MTZJ4.7B,4.7V,4.55-4.8V,500m	
...3 DZ805	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
...3 DZ806	0403-000691	DIODE-ZENER;R2K,170V,170-200V,-,-,TP	
...3 DZ807	0403-000734	DIODE-ZENER;TZP15B,15V,14.7-16.5V,1W,DO-	
...3 ICR01S	1203-001217	IC-POSI.ADJUST REG.;431,TO-92,3P,4.58MIL	
...3 L341	2701-000116	INDUCTOR-AXIAL;10uH,10%,4.2x9.8mm	
...3 L480	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 L481	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
...3 L483	2901-000299	FILTER-EMI ON BOARD;-,6A,UL/CSA,-,9x7.5,	
...3 L492	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
...3 L493	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
...3 L495	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
...3 L499	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 LS801	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 LS802	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 LZ107	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
...3 LZ108	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
...3 LZ109	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
...3 LZ110	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
...3 LZ111	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
...3 LZ112	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
...3 Q301	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 Q350	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 Q351	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 Q352	0501-000366	TR-SMALL SIGNAL;KSC2330-Y,NPN,1W,TO-92L,	
...3 Q381	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 Q382	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 Q401	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 Q402	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 Q421	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 Q422	0505-000156	FET-SILICON;IRF620,N,200V,5A,0.8ohm,50W,	
...3 Q432	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
...3 Q435	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
...3 Q436	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 Q451	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 Q461	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 Q471	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 Q472	0505-000156	FET-SILICON;IRF620,N,200V,5A,0.8ohm,50W,	
...3 Q474	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 Q481	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 Q482	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
...3 QR401S	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
...3 QS801	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
...3 QS802	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 R301	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
...3 R302	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
...3 R303	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
...3 R305	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
...3 R306	2003-002129	R-METAL OXIDE(S);3.9ohm,5%,2W,AF,TP,3.9x	
...3 R307	2003-001036	R-METAL OXIDE(S);3.3ohm,5%,2W,AF,TP,3.9x	
...3 R308	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
...3 R310	2003-002009	R-METAL OXIDE(S);390ohm,5%,2W,AF,TP,3.9x	
...3 R312	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R313	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R314	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R332	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
...3 R333	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
...3 R334	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
...3 R350	2001-000878	R-CARBON;6.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R351	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R352	2001-000837	R-CARBON;51KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R353	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R354	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R355	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R356	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R357	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R358	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R359	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 R360	2001-000723	R-CARBON;4.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R361	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
...3 R362	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
...3 R363	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
...3 R364	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
...3 R365	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
...3 R366	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W,AA,TP,3.7x	
...3 R384	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R385	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R386	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R387	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R388	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R389	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R397	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R405	2009-001109	R-TEMPERATURE;240ohm,5%,1/4W,AA,TP,2.3x6	
...3 R406	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP,2.4x6.	
...3 R407	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
...3 R408	2004-001402	R-METAL(S);6.8Kohm,1%,1/2W,AA,TP,2.4x6.4	
...3 R409	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 R410	2001-000052	R-CARBON(S);3.3KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R411	2008-001113	R-FUSIBLE(S);0.22ohm,10%,2W,AG,TP,3.9x12	
...3 R412	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R413	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
...3 R414	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R415	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R416	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R417	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R418	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R419	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R420	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R421	2003-002159	R-METAL OXIDE;150OHM,5%,1W,AG,TP,4.3X12M	
...3 R422	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 R423	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R424	2008-000299	R-FUSIBLE(S);47ohm,5%,2W,AF,TP,3.9x10mm	
...3 R425	2003-000417	R-METAL OXIDE(S);1.2Kohm,5%,3W,AA,TP,6x1	
...3 R426	2003-002153	R-METAL OXIDE;4.7OHM,5%,2W,AG,TP,6X16MM	
...3 R427	2003-002152	R-METAL OXIDE;1OHM,5%,2W,AG,TP,6X16MM	
...3 R427A	2003-002152	R-METAL OXIDE;1OHM,5%,2W,AG,TP,6X16MM	
...3 R428	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
...3 R428A	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
...3 R429	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
...3 R430	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
...3 R432	2001-001144	R-CARBON(S);4.7KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R433	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R434	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R435	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
...3 R436	2001-001182	R-CARBON(S);7.5KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R437	2008-001087	R-FUSIBLE(S);1.8ohm,5%,2W,AG,TP,3.9x12mm	
...3 R438	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R439	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R440	2008-000282	R-FUSIBLE;0.47ohm,5%,1W,AA,TP,3.9x12mm	
...3 R441	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
...3 R442	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
...3 R442A	2008-000254	R-FUSIBLE(S);0.68ohm,5%,2W,AF,TP,3.9x10m	
...3 R443	2003-002156	R-METAL OXIDE;560OHM,5%,2W,AG,TP,6X16MM	
...3 R443A	2003-002156	R-METAL OXIDE;560OHM,5%,2W,AG,TP,6X16MM	
...3 R444	2003-000995	R-METAL OXIDE(S);3.3Kohm,5%,2W,AF,TP,3.9	
...3 R445	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
...3 R446	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R447	2008-000254	R-FUSIBLE(S);0.68ohm,5%,2W,AF,TP,3.9x10m	
...3 R448	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R449	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
...3 R454	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R455	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R456	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R458	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R459	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 R460	2003-002044	R-METAL OXIDE(S);100ohm,5%,1W,AF,TP,2.5x	
...3 R461	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R462	2008-001079	R-FUSIBLE;4.7OHM,5%,2W,AF,TP,3.9X10MM	
...3 R463	2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP,3.9x	
...3 R464	2003-002158	R-METAL OXIDE;0.68OHM,5%,1W,AG,TP,4.3X12	
...3 R465	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
...3 R466	2004-001386	R-METAL(S);16.9Kohm,1%,1/2W,AA,TP,2.4x6.	
...3 R467	2004-001986	R-METAL(S);35.7Kohm,1%,1/2W,AA,TP,2.4x6.	
...3 R468	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	

Loc. No.	Code No.	Description ; Specification	Remark
...3 R469	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
...3 R470	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 R471	2004-002011	R-METAL(S);110Kohm,1%,1/2W,AA,TP,2.4x6.4	
...3 R472	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
...3 R473	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
...3 R474	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R475	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R482	2001-001031	R-CARBON;91KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R483	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R484	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R485	2008-001137	R-FUSIBLE(S);3.3ohm,5%,1W,AF,TP,3.9x10mm	
...3 R486	2008-001018	R-FUSIBLE(S);0.47ohm,10%,2W,AF,TP,3.9x10	
...3 R487	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R488	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R489	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R490	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R491	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 R492	2001-000508	R-CARBON;220KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R494	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R495	2001-000262	R-CARBON;1.8MOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R501	2004-001376	R-METAL(S);11Kohm,1%,1/2W,AA,TP,2.4x6.4m	
...3 R502	2004-001369	R-METAL(S);1.2Kohm,1%,1/2W,AA,TP,2.4x6.4	
...3 R856	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R857	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 RF801S	2008-000282	R-FUSIBLE;0.47ohm,5%,1W,AA,TP,3.9x12mm	
...3 RFS802	2008-000294	R-FUSIBLE(S);33ohm,5%,2W,AF,TP,3.9x10mm	
...3 RFZ19	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
...3 RFZ20	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
...3 RFZ21	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
...3 RFZ22	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
...3 RFZ50	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
...3 RFZ51	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
...3 RFZ52	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
...3 RFZ53	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
...3 RR401S	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
...3 RR402S	2103-001086	VR-SEMI;100KOHM,25%,0.3W,TOP	
...3 RR403S	2004-004001	R-METAL(S);180Kohm,1%,1/2W,AA,TP,2.5x6.5	
...3 RR404S	2004-004046	R-METAL(S);430Kohm,1%,1/2W,AA,TP,2.5x6.5	
...3 RR405S	2004-004046	R-METAL(S);430Kohm,1%,1/2W,AA,TP,2.5x6.5	
...3 RR406S	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
...3 RR407S	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RR408S	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RR409S	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
...3 RR410S	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RR471S	2103-001024	VR-SEMI;50Kohm,25%,0.3W,TOP	
...3 RS801	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 RS803	2001-001159	R-CARBON(S);510OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RS804	2001-001182	R-CARBON(S);7.5KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 RS805	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
...3 RS806	2001-001159	R-CARBON(S);510OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RS807	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RS808	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RS809	2001-001099	R-CARBON(S);2.7KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 RS810	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 RS811	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 RZ104	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RZ105	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RZ106	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RZ107	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RZ108	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RZ109	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RZ110	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ111	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ112	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ113	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RZ114	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ115	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RZ116	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ117	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RZ118	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ123	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
...3 RZ124	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
...3 RZ125	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
...3 RZ126	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
...3 RZ127	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
...3 RZ128	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
...3 RZ129	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
...3 RZ129A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
...3 RZ130	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
...3 RZ130A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
...3 RZ131	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
...3 RZ131A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
...3 RZ132	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
...3 RZ132A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
...3 RZ133	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ134	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ135	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ136	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RZ137	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ138	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RZ139	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ140	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RZ141	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ142	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
...3 RZ143	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
...3 RZ144	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
...3 RZ145	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
...3 RZ146	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
...3 RZ147	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
...3 RZ148	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
...3 RZ148A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
...3 RZ149	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
...3 RZ149A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
...3 VP811S	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
..2	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	

ASSY-CONTROL

1		*AA95-01068A	ASSY-CONTROL;,PCL545R,P54A	S.N.A
..2	PCB+A/	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
..2		AA91-00652A	ASSY-CONTROL;,HIPS HB BLK,SEA,PCL545R(54	S.N.A
...3	KC+PC	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR	
...3	KNOPOW	AA61-60003J	SPRING-CS;-,SUS304,0.5,OD6,H12,N7,-,-,-	
...3		AA64-01750B	KNOB POWER;54J9,62J9,ABS HB,GRAY,SV-012P	S.N.A
...3		AA64-01752B	INDICATOR LED;54J9,62J9,ACRYL,CLR	S.N.A
...3		AA64-01755B	WINDOW REMOCON;54J9,62J9,PC,SEMI VIOLET	S.N.A
...3		AA64-01749B	KNOB-CONTROL,HOLDER;54J9,62J9,ABS HB,BLK	S.N.A
...3		AA64-01747B	DOOR-AV;54J9,62J9,HIPS HB,BLK,BL903P	S.N.A
...3		AA64-01746B	PANEL-CONTROL;54J9,62J9,HIPS HB,BLK,LG80	S.N.A
...3		AA64-01396E	INLAY-AV;43,54,62J8,PS SHEET,T0.5,-,BLK	
..2		AA95-00961A	ASSY-PCB,CONTROL;-,PCL534R,P54A,-,-,-	S.N.A
...3	CNW01	AA39-00223A	LEAD CONNECTOR ASSY;,11P,67096-011,35155	
...3	CNY01	3711-003353	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,ANGLE,	
...3	CNY02	3711-000447	CONNECTOR-HEADER;3WALL,3P,1R,2.5mm,ANGLE	
...3	CNYW02	AA39-20016A	LEAD CONNECTOR-ASSY;,3P,67096-003,S,200,	
...3	CY01	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
...3	DZY02	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3	DZY03	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3	LEDY01	0601-001381	LED;ROUND,RED/GRN,5.0MM,650/563NM	
...3	PCB	AA41-00425A	PCB-CONTROL;SVP54J8SR,FR-1,1L,A,1.6T,245	S.N.A
...3	QY01	0504-000123	TR-DIGITAL;KSR1010,NPN,300mW,10K,TO-92,T	
...3	RMY01	AA59-60002B	MODULE-REMOCON;-,ORC-50HF,38KHZ,940MM,ME	
...3	RY02	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	RY03	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	RY04	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	RY05	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	RY06	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	RY07	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4M	
...3	RY08	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
...3	RY09	2001-000109	R-CARBON(S);47OOHM,5%,1/2W,AA,TP,2.4X6.4	
...3	SWY01	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY02	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY03	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY04	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY05	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY06	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY07	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY08	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3		3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
..2		AA95-00998A	ASSY-PCB,A/V FRONT;,PCL545R,P54A	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
...3 CNY01A	3711-003974	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
...3 CNY702	3711-000447	CONNECTOR-HEADER;3WALL,3P,1R,2.5mm,ANGLE	
...3 CNYW01	AA39-00231A	LEAD CONNECTOR ASSY;,12P,35155-1200,6709	
...3 JK101	3722-000544	JACK-VHS;4P,11.5mm,AG,BLK,N	
...3 JK102	3722-001164	JACK-RCA;3P,3.4mm,SN,WH:YE:RE,#16-22	
...3 PCB	AA41-00453A	PCB-AV FRONT;PCL545R,FR-1,1L,A,1.6T,330X	S.N.A
...3 RK101	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 SW101	3404-000208	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
...3	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	

ASSY-PCB,SENSOR

1	*AA95-01031A	ASSY-PCB,SENSOR;,PCL545R,P54A	
..2 CN01	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,STRAIGH	
..2 D01	0603-001067	PHOTO DIODE;-,10V,560nm,BK	
..2 PCB	AA41-00433A	PCB-SENSOR;PCL545R,CEM-1,1L,A,1.6T,245X2	
..2 Q01	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..2	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
..2	AA99-20090G	ASSY-PCB SUB,AUTO; AA95-01031A ,V	S.N.A
...3 R01	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R02	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R03	2001-000454	R-CARBON;2.2MOHM,5%,1/8W,AA,TP,1.8X3.2M	

ASSY PCB CRT

1	*AA95-00970A	ASSY PCB CRT;-,P54A,54,U.S.A,PCL545R	
..2 C511	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
..2 C541	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
..2 C571	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
..2 CN501	3711-003051	CONNECTOR-HEADER;BOX,8P,1R,2.5mm,STRAGHT	
..2 CN502	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5mm,STRAGH	
..2 CN502B	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5mm,STRAGH	
..2 CN503	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5mm,STRAGH	
..2 CN503B	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5mm,STRAGH	
..2 CNW401	AA39-20027C	LEAD CONNECTOR-ASSY;,6P,67096-006,S,500,	
..2 CNW501	AA39-00127B	LEAD CONNECTOR-ASSY;,8P,35155-0800,S,600	
..2 CNW502	AA39-00112A	LEAD CONNECTOR-ASSY;,10P,35155-1000,S,30	
..2 CNW503	AA39-00112A	LEAD CONNECTOR-ASSY;,10P,35155-1000,S,30	
..2 FOCUS-	AA39-20115B	LEAD CONNECTOR-ASSY;,1P,BUSHING,-,700MM,	
..2 FOCUS-	AA39-20115A	LEAD CONNECTOR-ASSY;,1P,BUSHING,500,3239	
..2 FOCUS-	AA39-20115A	LEAD CONNECTOR-ASSY;,1P,BUSHING,500,3239	
..2 GBW-GN	3811-000446	WIRE-PVC CU;TCWA,600V,ROLL,17/0.16mm,#22	
..2 GBW-SC	3811-000480	WIRE-PVC CU;BCWA,1KV,ROLL,17/0.16mm,#22,	
..2 GNDWIR	AA39-00198A	LEAD CONNECTOR ASSY;,3P,YFH800-03,YFH800	
..2 GRW-GN	3811-000446	WIRE-PVC CU;TCWA,600V,ROLL,17/0.16mm,#22	
..2 GRW-SC	3811-000480	WIRE-PVC CU;BCWA,1KV,ROLL,17/0.16mm,#22,	
..2 IC501	AA96-50151B	ASSY-H/S;-,AMP,AA61-10060A,TDA6111Q,-	
...3	1201-001131	IC-VIDEO AMP;6111,SIP,9P,-,SINGLE,-,PLAS	
...3	6001-000057	SCREW-MACHINE;RH,+,M3,L6,ZPC(BLK),SWRCH1	
...3	6021-000222	NUT-HEXAGON;2C,M3,ZPC(YEL),SM20C 1	
...3	AA61-10060A	BRACKET-TR;W3220,CUS-1 1/2H,T0.5,-,-,-,-	
..2 IC531	AA96-50151B	ASSY-H/S;-,AMP,AA61-10060A,TDA6111Q,-	
..2 IC561	AA96-50151B	ASSY-H/S;-,AMP,AA61-10060A,TDA6111Q,-	
..2 PCB	AA41-00406A	PCB-CRT;PCL545R,FR-1,1L,A,1.6T,245X245	
..2 SG502	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
..2 SG532	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
..2 SG562	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
..2 V501	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U	
..2 V531	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U	
..2 V561	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U	
..2 VR501	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
..2 VR531	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
..2 VR561	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
..2	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
..2	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
..2	AA99-20087L	ASSY-PCB SUB,AUTO; AA95-00970A ,V	S.N.A
...3 C502	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
...3 C503	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
...3 C504	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
...3 C505	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
...3 C506	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
...3 C507	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
...3 C510	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
...3 C512	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
...3 C513	2201-000983	C-CERAMIC,DISC;1nF,10%,2kV,Y5P,TP,9x5,7.	
...3 C514	2201-000599	C-CERAMIC,DISC;0.56nF,10%,500V,Y5P,TP,5.	
...3 C532	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
...3 C533	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
...3 C534	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
...3 C535	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
...3 C536	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
...3 C537	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
...3 C540	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
...3 C542	2201-000983	C-CERAMIC,DISC;1nF,10%,2kV,Y5P,TP,9x5,7.	
...3 C543	2201-000599	C-CERAMIC,DISC;0.56nF,10%,500V,Y5P,TP,5.	
...3 C562	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
...3 C563	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
...3 C564	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
...3 C565	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
...3 C566	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
...3 C567	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
...3 C570	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
...3 C572	2201-000983	C-CERAMIC,DISC;1nF,10%,2kV,Y5P,TP,9x5,7.	
...3 C573	2201-000599	C-CERAMIC,DISC;0.56nF,10%,500V,Y5P,TP,5.	
...3 CN401	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5MM,STRAIGH	
...3 D501	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3 D502	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3 D503	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
...3 D504	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 D509	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 D510	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 D531	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3 D532	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3 D533	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
...3 D561	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3 D562	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3 D563	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
...3 DZ501	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
...3 DZ502	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
...3 DZ503	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
...3 DZ531	0403-001317	DIODE-ZENER;MTZJ3.0B,3.01-3.22V,500mW,DO	
...3 DZ532	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
...3 DZ533	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
...3 DZ561	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
...3 DZ562	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
...3 DZ563	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
...3 L501	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
...3 L531	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
...3 L561	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
...3 Q501	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
...3 Q502	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 Q504	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
...3 Q531	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
...3 Q533	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
...3 Q561	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
...3 Q563	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
...3 R500	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R502	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R503	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R504	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R505	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R506	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
...3 R507	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R508	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
...3 R509	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R510	2001-001000	R-CARBON;82KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R511	2001-000313	R-CARBON;11KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R513	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
...3 R514	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R515	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
...3 R516	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R517	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R518	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
...3 R519	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
...3 R520	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
...3 R521	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R522	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W,AA,TP,3.7x	

Loc. No.	Code No.	Description ; Specification	Remark
...3 R523	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W,AA,TP,3.7x	
...3 R524	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 R526	2001-000539	R-CARBON;24KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R527	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R528	2001-001015	R-CARBON;9.1KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R529	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
...3 R532	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R533	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R536	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
...3 R537	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R538	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
...3 R540	2001-000837	R-CARBON;51KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R541	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R543	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
...3 R544	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R545	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
...3 R546	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R547	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R548	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
...3 R549	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
...3 R550	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
...3 R551	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R552	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W,AA,TP,3.7x	
...3 R553	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W,AA,TP,3.7x	
...3 R554	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 R555	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R556	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R557	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R559	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
...3 R562	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R563	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R564	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R566	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
...3 R567	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R568	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R569	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R570	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R571	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R572	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
...3 R573	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
...3 R574	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R575	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
...3 R576	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R577	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R578	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
...3 R579	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
...3 R580	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
...3 R581	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R582	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W,AA,TP,3.7x	
...3 R583	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W,AA,TP,3.7x	
...3 R584	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 R589	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
...3 SG351	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
...3 SG501	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
...3 SG503	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
...3 SG533	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
...3 SG561	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
...3 SG563	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	

ASSY PCB MAIN(OPT)

1	*AA94-03388D	ASSY PCB MAIN(OPT);PCL5415RX/XAA,P54A,U.	
..2 C664	2401-001068	C-AL;3300uF,20%,50V,GP,BK,22x40,10	
..2 C665	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
..2 CG-BOT	AA63-00397B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,SOUN	
..2 CG-TOP	AA63-00396B	SHIELD CASE-TOP;PRJT,P54A,SPTE,T0.5,SOUN	
..2 CN01	3703-001150	CONNECTOR-DIN;32P,2R,FEMALE,STRAIGHT,AUF	
..2 CN02	3703-001150	CONNECTOR-DIN;32P,2R,FEMALE,STRAIGHT,AUF	
..2 CNM01	3703-001187	CONNECTOR-DIN;64P,2R,FEMALE,STRAIGHT,AU	
..2 CNS01	3703-001187	CONNECTOR-DIN;64P,2R,FEMALE,STRAIGHT,AU	
..2 CNT01	3710-001208	CONNECTOR-SOCKET;32P,2R,2.54mm,STRAIGHT,	
..2 CNT02	3710-001208	CONNECTOR-SOCKET;32P,2R,2.54mm,STRAIGHT,	
..2 CNZ01	3703-001150	CONNECTOR-DIN;32P,2R,FEMALE,STRAIGHT,AUF	
..2 DW-BOT	AA63-00395B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,D/W	
..2 DW-TOP	AA63-00394B	SHIELD CASE-TOP;PRJT P54A,SPTE,T0.5,D/W	
..2 IC102	AA96-00110C	ASSY-H/S;-,-,AA62-30013K,SI-3090C,-	
...3	1203-000577	IC-VOLTAGE REGUATOR;3090,ZIP,5P,-,PLASTI	
...3	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...3	AA62-30013K	HEATSINK-ES;-,-,-,-,44/18,-,WHT,A6063 EX	
..2 IC104	AA96-00110A	ASSY-H/S;-,-,AA62-30013K,SI-3050C,-	
...3	1203-000203	IC-POSI.ADJUST REG.;3050,TO-220,5P,-,PLA	
...3	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...3	AA62-30013K	HEATSINK-ES;-,-,-,-,44/18,-,WHT,A6063 EX	
..2 IC106	AA96-00110A	ASSY-H/S;-,-,AA62-30013K,SI-3050C,-	
..2 IC655	AA96-00038A	ASSY-H/S;-,SOUND AMP,AA62-30173E,TDA726	
...3	0205-000129	GREASE-SILICON;SC102,JAPAN	
...3	1201-001026	IC-POWER AMP;7265,ZIP,11P,19.6MIL,DUAL,1	
...3	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...3	AA62-30173E	HEAT-SINK,ES;-,-,T1.0,WHITE,SCREW-HOLE(1	
..2 ICZ101	AA96-00110A	ASSY-H/S;-,-,AA62-30013K,SI-3050C,-	
..2 ICZ102	1203-000121	IC-NEGA.FIXED REG.;7906,TO-220,3P,-,PLAS	
..2 L601	AA29-00004A	FILTER-LINE NOISE;-,20UH,3A,AC80-260V,TQ	
..2 L602	AA27-10001C	COIL-CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
..2 MI-BOT	AA63-00397B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,SOUN	
..2 MI-TOP	AA63-00396B	SHIELD CASE-TOP;PRJT,P54A,SPTE,T0.5,SOUN	
..2 SO-BOT	AA63-00397B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,SOUN	
..2 SO-TOP	AA63-00396B	SHIELD CASE-TOP;PRJT,P54A,SPTE,T0.5,SOUN	
..2 TU103S	AA59-00164A	MODULE-RF,SPLITTER;-,UMX-NT-005,-,2IN/3O	
..2 WIRE	AA65-30018A	CLAMP-WIRE;NYLON-66,-,-,DATL-600,DONG-A,	
..2	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
..2	AA99-30217G	ASSY-PCB ROBOT; AA94-03388D ,ER	
...3 CN201	3711-003974	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
...3 CN501	3711-003051	CONNECTOR-HEADER;BOX,8P,1R,2.5mm,STRAGHT	
...3 CN801	3711-003975	CONNECTOR-HEADER;BOX,14P,1R,2.5mm,STRAIG	
...3 CN901	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
...3 CNZ02	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5mm,STRAGH	
...3 IC103	AA96-50147B	ASSY-H/S;-,TR,AA62-30012B,KA7808,-	
....4	1203-000293	IC-POSI.FIXED REG.;7808,TO-220,3P,-,PLAS	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
....4	AA62-30012B	HEAT SINK-ES;-,A6063 EXTR,-,-,45(16) T02	
...3 IC107	AA96-00111L	ASSY-H/S;-,-,AA62-30013L,KA78R12,-	
....4	1203-000165	IC-POSI.ADJUST REG.;78R12,TO-220,3P,-,-,	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
....4	AA62-30013L	HEATSINK-ES;-,-,-,-,44/22,-,WHT,-,-,-,-	
...3 TU101S	AA40-00032A	TUNER-F/S;TCPN3081PC09A(S),NTSC,TR,181CH	
...3 TU102S	AA40-00032A	TUNER-F/S;TCPN3081PC09A(S),NTSC,TR,181CH	
...3	AA99-10211S	ASSY-PCB MAIN,AUTO; AA99-30217G ,V	
....4 C100	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
....4 C101	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
....4 C102	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
....4 C103	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 C104	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
....4 C105	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 C106	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C107	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C110	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
....4 C111	2201-000180	C-CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3,5	
....4 C117	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C118	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C119	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
....4 C120	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
....4 C121	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
....4 C122	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
....4 C123	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C124	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C125	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C126	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
....4 C127	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C128	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C129	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
....4 C130	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
....4 C131	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
....4 C132	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 C133	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C134	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C135	2401-003034	C-AL;220uF,20%,16V,WT,TP,8x11.5,5	
....4 C136	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C137	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
....4 C138	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
....4 C140	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C142	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C144	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
....4 C145	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
....4 C146	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
....4 C147	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
....4 C149	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
....4 C150	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
....4 C151	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
....4 C152	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
....4 C153	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C154	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C155	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C157	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
....4 C191	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
....4 C666	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C667	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
....4 C668	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
....4 C676	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
....4 C686	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
....4 C687	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
....4 C688	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
....4 C689	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C690	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C691	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
....4 C701	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C801	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
....4 C901	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
....4 C902	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C903	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 CN101	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,STRAIGH	
....4 CN601	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	
....4 CN902	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,STRAIGH	
....4 CNY01	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5MM,STRAIGH	
....4 CZ101	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
....4 CZ102	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
....4 CZ103	2401-000689	C-AL;2200uF,20%,16V,GP,TP,13x25,5	
....4 CZ104	2401-000689	C-AL;2200uF,20%,16V,GP,TP,13x25,5	
....4 CZ105	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 CZ106	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 CZ107	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 CZ108	2201-000982	C-CERAMIC,DISC;10nF,+80-20%,50V,Y5V,TP,4	
....4 CZ109	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
....4 CZ110	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
....4 D603	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D604	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D605	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D606	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D664	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D665	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D701	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D702	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D703	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DZ128	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 DZ665	0403-001039	DIODE-ZENER;MA2560,56V,52-60V,1W,DO-41,T	
....4 DZ701	0403-001140	DIODE-ZENER;RD10ESAB-T4,10V,9.19-10.30V,	
....4 DZ801	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
....4 L100	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
....4 L101	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
....4 L102	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
....4 L103	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
....4 L104	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
....4 L105	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
....4 L107	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
....4 L108	2701-001007	INDUCTOR-AXIAL;24uH,10%,4.5x14mm	
....4 L110	2701-000116	INDUCTOR-AXIAL;10uH,10%,4.2x9.8mm	
....4 L111	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L112	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L113	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L603	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L604	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L605	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L901	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
....4 LDZ101	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
....4 LDZ102	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
....4 LZ101	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ102	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ103	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
....4 LZ104	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	

Loc. No.	Code No.	Description ; Specification	Remark
....4 PCB	AA41-00332B	PCB-MAIN;PCL545R,FR-1,1L,A,1.6T,330X245	
....4 Q601	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q666	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q668	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q701	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q702	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 R102	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R103	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R104	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R105	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R106	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R107	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R110	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R111	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R112	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R113	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R115	2001-000869	R-CARBON;56OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R117	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R602	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R603	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R604	2001-001168	R-CARBON(S);6.8KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R605	2001-001106	R-CARBON(S);220KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R661	2004-001970	R-METAL;1.8Kohm,1%,1/2W,AA,TP,6.5x2.5m	
....4 R662	2004-001970	R-METAL;1.8Kohm,1%,1/2W,AA,TP,6.5x2.5m	
....4 R663	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R664	2004-001970	R-METAL;1.8Kohm,1%,1/2W,AA,TP,6.5x2.5m	
....4 R665	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R666	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R669	2001-001121	R-CARBON(S);3.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R670	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R671	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R672	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R673	2001-001086	R-CARBON(S);18KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R673A	2001-001144	R-CARBON(S);4.7KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R681	2004-001970	R-METAL;1.8Kohm,1%,1/2W,AA,TP,6.5x2.5m	
....4 R682	2004-002019	R-METAL(S);33Kohm,1%,1/2W,AA,TP,2.5x6.5m	
....4 R683	2004-002019	R-METAL(S);33Kohm,1%,1/2W,AA,TP,2.5x6.5m	
....4 R685	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
....4 R686	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
....4 R687	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R689	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R690	2001-001144	R-CARBON(S);4.7KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R691	2001-001144	R-CARBON(S);4.7KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R701	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R702	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R703	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R704	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R888	2003-001098	R-METAL OXIDE(S);22Kohm,5%,3W,AA,TP,6x16	
....4 RF101	2008-001116	R-FUSIBLE(S);0.68ohm,10%,2W,AG,TP,3.9x12	
....4 RF104	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
....4 RF121	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
....4 RZ01	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ02	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RZ101	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ102	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..2	AA39-20010F	LEAD CONNECTOR-ASSY;,1P,YFH800-01,S,700,	
..2	AA39-20577A	LEAD CONNECTOR-ASSY;,6(3)P,YFH806-06,800	
..2	AA95-00996A	ASSY-PCB,DW-SRC;,PCL545R,P54A	
...3 CN01	3703-001124	CONNECTOR-DIN;32P,2R,MALE,ANGLE,AUF	
...3 CN02	3703-001124	CONNECTOR-DIN;32P,2R,MALE,ANGLE,AUF	
...3 CX01	2801-004019	CRYSTAL-UNIT;20.25MHz,30ppm,28-AAM,13pF,	
...3 DX01	2801-003811	CRYSTAL-UNIT;24.576MHZ,20PPM,28-AAM,30PF	
...3 PX01	2801-004019	CRYSTAL-UNIT;20.25MHz,30ppm,28-AAM,13pF,	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
...3	AA99-20088T	ASSY-PCB SUB,AUTO; AA95-00996A ,V	S.N.A
....4 CC01	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
....4 CC02	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CC03	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
....4 CC04	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
....4 CC05	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 CC06	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
....4 CC07	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CC08	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
....4 CC09	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 CC10	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CC11	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CC12	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
....4 CC13	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CC14	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CC15	2203-001646	C-CERAMIC,CHIP;3pF,0.5pF,50V,NPO,TP,2012	
....4 CC16	2203-001646	C-CERAMIC,CHIP;3pF,0.5pF,50V,NPO,TP,2012	
....4 CC17	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
....4 CC18	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
....4 CC19	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 CC20	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
....4 CC21	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 CC22	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
....4 CC23	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 CC24	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 CC25	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 CC26	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 CC27	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 CC28	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 CC29	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
....4 CC30	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 CC31	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
....4 CC32	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
....4 CC33	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
....4 CC35	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 CC36	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 CC37	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
....4 CC38	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
....4 CC39	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
....4 CC40	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
....4 CC41	2203-000998	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,160	
....4 CC42	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 CC43	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CC44	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 CC45	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
....4 CC47	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CC48	2203-005384	C-CERAMIC,CHIP;4700nF,+80-20%,10V,Y5V,TP	
....4 CC49	2203-005384	C-CERAMIC,CHIP;4700nF,+80-20%,10V,Y5V,TP	
....4 CC50	2203-005384	C-CERAMIC,CHIP;4700nF,+80-20%,10V,Y5V,TP	
....4 CD01	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
....4 CD02	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
....4 CF01	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
....4 CF02	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
....4 CL03	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
....4 CL05	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 CL06	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 CL07	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 CQ01	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 CQ02	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 CQ03	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 CQ04	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 CQ05	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 CR01	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
....4 CR02	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
....4 CR03	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
....4 CR04	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
....4 CR05	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 CR06	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 CR07	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 CR08	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 CR09	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 CR10	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 CR12	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
....4 CR13	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
....4 CR14	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
....4 CR15	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
....4 CR16	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
....4 CR20	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 CR22	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 CR25	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
....4 CR27	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 CR28	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 CR29	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
....4 CR30	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
....4 CR31	2007-000643	R-CHIP;270ohm,5%,1/16W,DA,TP,1608	
....4 CR32	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
....4 CR33	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
....4 CR35	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 CR37	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 CR38	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
....4 CR45	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 CR46	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 CR47	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
....4 CR48	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
....4 CR49	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
....4 CR50	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
....4 CR51	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
....4 CR52	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
....4 CR53	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
....4 CR54	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
....4 CR55	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
....4 CR56	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
....4 DC16	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 DC17	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 DC18	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 DC19	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 DC20	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 DC21	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
....4 DC22	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
....4 DC23	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 DC24	2203-001656	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,1608	
....4 DC25	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 DC26	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 DC27	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
....4 DC28	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 DC29	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 DC30	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 DC31	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 DC32	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 DC33	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 DC34	2203-000998	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,160	
....4 DC35	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 DC36	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
....4 DC37	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 DC38	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
....4 DC39	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
....4 DD01	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
....4 DD02	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
....4 DD03	0403-000689	DIODE-ZENER;DTZ5.1A,5.1V,4.84-5.04V,200m	
....4 DD06	0403-000689	DIODE-ZENER;DTZ5.1A,5.1V,4.84-5.04V,200m	
....4 DD07	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
....4 DL05	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 DL06	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 DL07	2702-001092	INDUCTOR-RADIAL;2.2uH,10%,6x4mm	
....4 DQ01	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
....4 DR16	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 DR17	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 DR18	2007-000101	R-CHIP;82Kohm,5%,1/16W,DA,TP,1608	
....4 DR19	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
....4 DR20	2007-000081	R-CHIP;2.7Kohm,5%,1/16W,DA,TP,1608	
....4 DR22	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 DR23	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
....4 DR24	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
....4 DR25	2007-000129	R-CHIP;27Kohm,5%,1/16W,DA,TP,1608	
....4 DR26	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 DR27	2007-000127	R-CHIP;9.1Kohm,5%,1/16W,DA,TP,1608	
....4 DR29	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 DR30	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 DR31	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 DR32	2007-000118	R-CHIP;390ohm,5%,1/16W,DA,TP,1608	
....4 DR33	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 DR34	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 DR35	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 DR36	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
....4 DR37	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 DR38	2007-000079	R-CHIP;1.8Kohm,5%,1/16W,DA,TP,1608	
....4 DR40	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 DR41	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 DR44	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 DR46	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
....4 IC01	1204-001598	IC-VIDEO PROCESS;VPC3230D-B2,QFP,80P,-,P	
....4 IC02	1204-001623	IC-VERTICAL PROCESSO;SDA9400,QFP,64P,-,P	
....4 IC03	1002-001045	IC-D/A CONVERTER;9280,8BIT,PLCC,68P,-,-,	
....4 IC06	1204-001372	IC-HOR./VER.PROCESSO;SDA9361,QFP,44P,-,P	
....4 IC07	1204-001550	IC-VIDEO PROCESS;CXA2101AQ,QFP,80P,-,PLA	
....4 IC11	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
....4 IC12	1203-001140	IC-VOL. DETECTOR;7039,TO-92P,3P,-,PLASTI	

Loc. No.	Code No.	Description ; Specification	Remark
....4 IC13	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
....4 PC01	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
....4 PC02	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 PC03	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
....4 PC04	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC05	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
....4 PC06	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 PC07	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC08	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC09	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC10	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC11	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC12	2203-001646	C-CERAMIC,CHIP;3pF,0.5pF,50V,NPO,TP,2012	
....4 PC13	2203-001646	C-CERAMIC,CHIP;3pF,0.5pF,50V,NPO,TP,2012	
....4 PC14	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
....4 PC15	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
....4 PC16	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 PC17	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
....4 PC18	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 PC19	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
....4 PC20	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 PC21	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 PC22	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 PC23	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 PC24	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
....4 PC25	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 PC26	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
....4 PC27	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
....4 PC28	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
....4 PC29	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC30	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC31	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC32	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC33	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC34	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC35	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC36	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC37	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC38	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC39	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC40	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC41	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 PC42	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC43	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 PC47	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
....4 PC48	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
....4 PC49	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
....4 PC52	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
....4 PC53	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC54	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
....4 PC55	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 PC56	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 PC57	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 PC58	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 PC78	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PCB	AA41-00418A	PCB-DW SRC;PCL545R,FR-4,4L,A,1.6T,245X24	
....4 PIC01	1204-001598	IC-VIDEO PROCESS;VPC3230D-B2,QFP,80P,-,P	
....4 PIC02	1109-001144	IC-FIFO;81V04160,2x256Kx8Bit,TQFP,100P	
....4 PIC04	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
....4 PL01	3301-001324	CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM,	
....4 PL02	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 PR01	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
....4 PR02	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
....4 PR03	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 PR04	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 PR06	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
....4 PR07	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
....4 PR08	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
....4 PR11	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
....4 PR12	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
....4 PR19	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
....4 PR20	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
....4 SC01	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 SC02	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC03	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 SC04	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC05	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC06	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC07	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC08	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC09	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC11	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC12	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC13	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC14	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC21	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC22	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
....4 SC23	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC24	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC25	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 SC26	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
....4 SC27	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC28	2203-000552	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,1608	
....4 SC29	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC30	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 SC31	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 SC32	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC33	2203-000552	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,1608	
....4 SC34	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC35	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC36	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 SC37	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC38	2203-000552	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,1608	
....4 SC51	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 SC52	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC53	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 SC54	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SF01	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
....4 SL01	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 SL02	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 SL03	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 SL04	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 SL05	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 SL06	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 SL08	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 SL09	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
....4 SR01	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 SR02	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 SR03	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 SR04	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
....4 SR05	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
....4 SR06	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
....4 SR07	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
....4 SR08	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 SR09	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 SR11	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 SR12	2007-001056	R-CHIP;6.2Kohm,5%,1/16W,DA,TP,1608	
....4 SR13	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
....4 SR14	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 SR15	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 SR16	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
....4 SR17	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 SR18	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 SR19	2007-000381	R-CHIP;13Kohm,5%,1/16W,DA,TP,1608	
....4 SR21	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
....4 SR22	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 SR23	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 SR24	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 SR25	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP,2012	
....4 YC01	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC02	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC03	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC04	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC05	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC06	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC07	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC08	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC09	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC10	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC11	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC12	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC13	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC14	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC15	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	

Loc. No.	Code No.	Description ; Specification	Remark
....4 YC16	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC17	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC18	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC19	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC20	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC21	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 YC22	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC23	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 YC24	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC25	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC26	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 YC27	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 YC28	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 YC29	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 YC30	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC31	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
....4 YC32	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 YC33	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 YC34	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 YC35	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 YC36	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 YC37	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 YC38	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
....4 YC39	2203-000998	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,160	
....4 YC40	2203-000998	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,160	
....4 YC45	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC46	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 YC47	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 YC48	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 YC49	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC50	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC51	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
....4 YC52	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
....4 YC53	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC54	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC55	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC56	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC57	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 YC58	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC59	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC60	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC62	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
....4 YC63	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
....4 YC66	2203-000815	C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP,160	
....4 YD01	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
....4 YD02	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
....4 YD03	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
....4 YD04	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
....4 YD05	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
....4 YF01	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
....4 YF02	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
....4 YF03	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
....4 YF04	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
....4 YF05	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
....4 YL01	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
....4 YL02	2702-000160	INDUCTOR-RADIAL;4.7uH,10%,6x6.4mm	
....4 YQ01	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
....4 YQ02	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
....4 YQ03	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
....4 YQ06	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 YQ08	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
....4 YQ11	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 YQ12	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 YR05	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR06	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR07	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR08	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR09	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR10	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR100	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR101	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR102	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR103	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR104	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR105	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR11	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR12	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
....4 YR14	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
....4 YR15	2007-000939	R-CHIP;47Kohm,1%,1/16W,DA,TP,1608	
....4 YR18	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR23	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 YR24	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 YR25	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR26	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR27	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR28	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR29	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
....4 YR30	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR31	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
....4 YR32	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR33	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
....4 YR40	2007-000691	R-CHIP;3.3Mohm,5%,1/16W,DA,TP,1608	
....4 YR41	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR43	2007-000799	R-CHIP;360ohm,5%,1/16W,DA,TP,1608	
....4 YR44	2007-000799	R-CHIP;360ohm,5%,1/16W,DA,TP,1608	
....4 YR45	2007-000799	R-CHIP;360ohm,5%,1/16W,DA,TP,1608	
....4 YR46	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR47	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR48	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR50	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
....4 YR51	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR53	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR56	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR59	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 YR60	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR61	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
....4 YR62	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 YR63	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR64	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR65	2007-000583	R-CHIP;22Kohm,1%,1/16W,DA,TP,1608	
....4 YR77	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
....4 YR78	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
....4 YR79	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
....4 YR83	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR85	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR86	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR88	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 YR89	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 YR90	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR91	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR92	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR98	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 YR99	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
...3	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	
..2	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
..2	AA95-00707A	ASSY-PCB,CAPTION;,PCL545R,P54A	
...3 BK01	AA61-10068A	BRACKET-PCB;M2160,SPTE,T0.3,-,-,-,-	
...3 CNC01	3711-002709	CONNECTOR-HEADER;NOWALL,12P,1R,2.5MM,ANG	
...3 CNC02	3711-002708	CONNECTOR-HEADER;NOWALL,10P,1R,2.5mm,ANG	
...3 ICC01	1204-001718	IC-DECODER;Z86129,DIP,18P,300MIL,PLASTIC	
...3 ICC02	1001-001083	IC-VIDEO SWITCH;NJM2248D,-,DIP,8P,300MIL	
...3 ICC03	1001-001083	IC-VIDEO SWITCH;NJM2248D,-,DIP,8P,300MIL	
...3 PCB	AA41-00337A	PCB-CAPTION;PCL545R,FR-1,1L,A,1.6T,245X2	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
...3	AA99-20080H	ASSY-PCB SUB,AUTO; AA95-00707A ,V	S.N.A
....4 CC01	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
....4 CC02	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 CC03	2201-000600	C-CERAMIC,DISC;0.56nF,10%,50V,Y5P,TP,5x3	
....4 CC04	2401-000223	C-AL;100nF,20%,50V,LL,TP,5x11mm,5mm	
....4 CC05	2301-000310	C-FILM,PEF;68nF,5%,50V,TP,8.0X8.5X4.0X5,	
....4 CC06	2301-000301	C-FILM,PEF;6.8nF,5%,50V,TP,6.5X5.5X3.0X5	
....4 CC07	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
....4 CC08	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 CC09	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 CC10	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 CC11	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
....4 CC12	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 CC13	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
....4 CC14	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 CC15	2201-000600	C-CERAMIC,DISC;0.56nF,10%,50V,Y5P,TP,5x3	
....4 CC16	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 CC19	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 DC01	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DC02	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	

Loc. No.	Code No.	Description ; Specification	Remark
....4 DC03	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 LC01	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
....4 QC01	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 QC02	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 RC01	2004-000433	R-METAL;1Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
....4 RC02	2004-000433	R-METAL;1Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
....4 RC03	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RC04	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RC05	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RC06	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RC07	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RC08	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RC09	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RC10	2004-000433	R-METAL;1Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
....4 RC11	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RC12	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RC13	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RC14	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RC15	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RC16	2004-000218	R-METAL;10Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
....4 RC17	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RC18	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RC19	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RC20	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RC21	2001-000628	R-CARBON;3000HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RC22	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RC23	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RC24	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RC25	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
....4 RC30	2001-000708	R-CARBON;39OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..2	AA95-00706C	ASSY-PCB,CONV MDL;,PCL545R,P54A	
...3 C163	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
...3 CN103	3711-001094	CONNECTOR-HEADER;BOX,7P,1R,2.5mm,ANGLE,-	
...3 CN201	3703-001124	CONNECTOR-DIN;32P,2R,MALE,ANGLE,AUF	
...3 IC113	1203-000641	IC-RESET;7442,TO-92,3P,-,PLASTIC,-0.3/7	
...3	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
...3	AA99-20087Z	ASSY-PCB SUB,AUTO; AA95-00706C ,V	S.N.A
....4 C101	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.	
....4 C102	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.	
....4 C103	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.	
....4 C104	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C105	2203-000851	C-CERAMIC,CHIP;0.039nF,5%,50V,NP0,TP,160	
....4 C106	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C107	2203-000715	C-CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,1608	
....4 C108	2402-000170	C-AL,SMD;1uF,20%,50V,GP,TP,4.3x4.3x5.4,	
....4 C109	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C110	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 C111	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C112	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
....4 C113	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
....4 C114	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C115	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C116	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C117	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C118	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C119	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C121	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C122	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C123	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C124	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C125	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C126	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C127	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C128	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C129	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C130	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C131	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C132	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C133	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
....4 C134	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C135	2203-000715	C-CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,1608	
....4 C136	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C137	2203-000715	C-CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,1608	
....4 C138	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C139	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C140	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
....4 C141	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C142	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
....4 C143	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C144	2203-000715	C-CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,1608	
....4 C145	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C146	2203-000715	C-CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,1608	
....4 C147	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C148	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
....4 C149	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C150	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C151	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C152	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
....4 C153	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C154	2203-000715	C-CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,1608	
....4 C155	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C156	2203-000715	C-CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,1608	
....4 C157	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C158	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
....4 C159	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C160	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C161	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.	
....4 C162	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.	
....4 C164	2402-000173	C-AL,SMD;4.7uF,20%,35V,GP,TP,4.3x4.3x5.	
....4 C165	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C166	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C167	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
....4 C168	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C169	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C170	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C172	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.	
....4 C173	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.	
....4 C174	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.	
....4 C201	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C202	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C203	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C204	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C205	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C206	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C301	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.	
....4 D101	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
....4 D102	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
....4 DZ101	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ102	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ105	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ106	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ107	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ108	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ109	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ110	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ111	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ112	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ113	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ114	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ115	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ116	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ201	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ202	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ203	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ204	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ205	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 EF101	2901-000229	FILTER-EMI SMD;50V,0.3A,-,22000pF,4.5x3.	
....4 EF102	2901-000229	FILTER-EMI SMD;50V,0.3A,-,22000pF,4.5x3.	
....4 EF105	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF106	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF107	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF108	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF109	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF110	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF111	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF112	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF113	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF114	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF115	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF116	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF201	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF202	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	

Loc. No.	Code No.	Description ; Specification	Remark
....4 EF203	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF204	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF205	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 IC101	AA13-00071A	IC-ASIC;-,SDC91,QFP,208P,CONV CONTROLL	
....4 IC102	0801-001043	IC-CMOS LOGIC;74HC4046,PHASE-LOCKED-LOOP	
....4 IC103	AA09-00032A	IC-MCU;TSC87251G2D-OTP,TSC87251G2D-OT	
....4 IC104	1103-001167	IC-EEPROM;28C64,8KX8BIT,TSOP,28P,-,120NS	
....4 IC105	1201-001520	IC-VIDEO AMP;2210,SOP,8P,150MIL,DUAL,7dB	
....4 IC106	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
....4 IC107	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
....4 IC108	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
....4 IC109	0801-001156	IC-CMOS LOGIC;74HC4066,BILATERAL SWITCH,	
....4 IC110	0801-001156	IC-CMOS LOGIC;74HC4066,BILATERAL SWITCH,	
....4 IC111	1001-000105	IC-ANALOG SWITCH;CD4066BM,BILATERAL CMOS	
....4 IC112	1001-000105	IC-ANALOG SWITCH;CD4066BM,BILATERAL CMOS	
....4 IC201	1203-001502	IC-POSI.FIXED REG.;431,SOT-23,3P,-,PLAST	
....4 PCB	AA41-00188F	PCB-CONVERGENCE MODULE;SVP-43J5M,FR-4,2L	
....4 Q101	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
....4 Q102	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
....4 Q103	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
....4 Q104	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
....4 Q107	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
....4 Q109	0505-000257	FET-SILICON;2SK217,N,-,20mA,-,150mW,SOT-	
....4 Q110	0505-000257	FET-SILICON;2SK217,N,-,20mA,-,150mW,SOT-	
....4 Q111	0505-000257	FET-SILICON;2SK217,N,-,20mA,-,150mW,SOT-	
....4 Q112	0505-000257	FET-SILICON;2SK217,N,-,20mA,-,150mW,SOT-	
....4 Q113	0505-000257	FET-SILICON;2SK217,N,-,20mA,-,150mW,SOT-	
....4 Q114	0505-000257	FET-SILICON;2SK217,N,-,20mA,-,150mW,SOT-	
....4 R101	2007-000882	R-CHIP;4.7ohm,5%,1/16W,DA,TP,1608	
....4 R102	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
....4 R103	2007-000882	R-CHIP;4.7ohm,5%,1/16W,DA,TP,1608	
....4 R104	2007-000882	R-CHIP;4.7ohm,5%,1/16W,DA,TP,1608	
....4 R105	2007-000416	R-CHIP;15ohm,5%,1/16W,DA,TP,1608	
....4 R106	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
....4 R107	2007-000102	R-CHIP;100Kohm,5%,1/16W,DA,TP,1608	
....4 R108	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R109	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
....4 R110	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
....4 R111	2007-000381	R-CHIP;13Kohm,5%,1/16W,DA,TP,1608	
....4 R112	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R113	2007-000099	R-CHIP;62Kohm,5%,1/16W,DA,TP,1608	
....4 R114	2007-000309	R-CHIP;10ohm,5%,1/16W,DA,TP,1608	
....4 R116	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R117	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R118	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R119	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R120	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R121	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
....4 R122	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R124	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R125	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
....4 R126	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
....4 R127	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
....4 R128	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R129	2007-000043	R-CHIP;1Kohm,1%,1/16W,DA,TP,1608	
....4 R130	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
....4 R131	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
....4 R132	2007-000043	R-CHIP;1Kohm,1%,1/16W,DA,TP,1608	
....4 R133	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
....4 R134	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
....4 R135	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R136	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R137	2007-000043	R-CHIP;1Kohm,1%,1/16W,DA,TP,1608	
....4 R138	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
....4 R139	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
....4 R140	2007-000043	R-CHIP;1Kohm,1%,1/16W,DA,TP,1608	
....4 R141	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
....4 R142	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
....4 R143	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R144	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R145	2007-000043	R-CHIP;1Kohm,1%,1/16W,DA,TP,1608	
....4 R146	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
....4 R147	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
....4 R148	2007-000043	R-CHIP;1Kohm,1%,1/16W,DA,TP,1608	
....4 R149	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
....4 R150	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
....4 R151	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R152	2007-000102	R-CHIP;100Kohm,5%,1/16W,DA,TP,1608	
....4 R153	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R154	2007-000134	R-CHIP;33Kohm,5%,1/16W,DA,TP,1608	
....4 R155	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 R156	2007-001056	R-CHIP;6.2Kohm,5%,1/16W,DA,TP,1608	
....4 R157	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
....4 R158	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R159	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R160	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R161	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R162	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R163	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R164	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R165	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R167	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R175	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 R176	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R178	2007-000729	R-CHIP;300ohm,5%,1/16W,DA,TP,1608	
....4 R179	2007-000729	R-CHIP;300ohm,5%,1/16W,DA,TP,1608	
....4 R180	2007-000729	R-CHIP;300ohm,5%,1/16W,DA,TP,1608	
....4 R181	2007-000729	R-CHIP;300ohm,5%,1/16W,DA,TP,1608	
....4 R182	2007-000729	R-CHIP;300ohm,5%,1/16W,DA,TP,1608	
....4 R183	2007-000729	R-CHIP;300ohm,5%,1/16W,DA,TP,1608	
....4 R192	2007-000309	R-CHIP;10ohm,5%,1/16W,DA,TP,1608	
....4 R193	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R194	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R201	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
....4 R203	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
....4 R204	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
....4 R205	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
....4 R206	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
....4 R207	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
....4 R208	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
....4 R301	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
....4 R302	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
....4 R303	2007-000093	R-CHIP;20Kohm,5%,1/16W,DA,TP,1608	
....4 R304	2007-000093	R-CHIP;20Kohm,5%,1/16W,DA,TP,1608	
....4 R305	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R306	2007-000704	R-CHIP;3.6Kohm,5%,1/16W,DA,TP,1608	
....4 R307	2007-000691	R-CHIP;3.3Mohm,5%,1/16W,DA,TP,1608	
....4 R308	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 X101	2801-003860	CRYSTAL-SMD;24MHz,30ppm,28-ABV,20pF,50oh	
..2	AA65-30105B	CLAMP-WIRE;NYLON 66,V2,NTR,25MM,ALL MODE	
..2	AA59-00171A	MODULE-FOCUS,PACK;SVP-5200,S300-P3,-,-,-	
..2	AA65-30018A	CLAMP-WIRE;NYLON-66,-,-,DATL-600,DONG-A,	
..2	AA65-30104B	CLAMP-WIRE;NYLON 66,V2,BLK,W2 Z5,ALL MOD	
..2	AA95-01103A	ASSY-PCB,SOUND;,PCL5415R,P54A	
...3 CN601	3703-001175	CONNECTOR-DIN;64P,2R,MALE,ANGLE,AU	
...3 XD601	2801-000186	CRYSTAL-UNIT;18.432MHz,25ppm,28-AAM,8pF,	
...3	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
...3	AA99-20091S	ASSY-PCB SUB,AUTO; AA95-01103A ,V	
....4 CD601	2401-000444	C-AL;10uF,20%,25V,GP,TP,5x5mm,5mm	
....4 CD602	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CD603	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
....4 CD604	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
....4 CD605	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
....4 CD606	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CD607	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
....4 CD608	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
....4 CD609	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
....4 CD610	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
....4 CD611	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
....4 CD612	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
....4 CD613	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CD614	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
....4 CD616	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
....4 CD617	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
....4 CD618	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
....4 CD619	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
....4 CD620	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
....4 CD621	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
....4 CD622	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
....4 CD623	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
....4 CD624	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
....4 CD625	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
....4 CD626	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	

Loc. No.	Code No.	Description ; Specification	Remark
....4 CD627	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
....4 CD628	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
....4 CD629	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 CD630	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
....4 CD631	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CD632	2401-000444	C-AL;10uF,20%,25V,GP,TP,5x5mm,5mm	
....4 CD633	2203-000332	C-CERAMIC,CHIP;0.012nF,5%,50V,NP0,TP,160	
....4 CD634	2203-000332	C-CERAMIC,CHIP;0.012nF,5%,50V,NP0,TP,160	
....4 CD635	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
....4 CD636	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
....4 CD637	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
....4 CD638	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
....4 CD639	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 CD640	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CD641	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 CD642	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 CD643	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 CD648	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 CD649	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 CD650	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
....4 CD652	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
....4 CD653	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
....4 CD654	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
....4 CD660	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
....4 CD662	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CD670	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
....4 ICD601	1204-001631	IC-SOUND PROCESSOR;MSP3450G,QFP,80P,-,PL	
....4 ICD602	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	
....4 LD601	2701-001032	INDUCTOR-AXIAL;100uH,10%,5x14mm	
....4 LD602	2701-001032	INDUCTOR-AXIAL;100uH,10%,5x14mm	
....4 LD603	2701-001032	INDUCTOR-AXIAL;100uH,10%,5x14mm	
....4 PCB	AA41-00335A	PCB-SOUND;PCL545R,FR-4,2L,A,1.6T,180X245	
....4 RD601	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD602	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD603	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD604	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD605	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD606	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD607	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD608	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD609	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD610	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 RD611	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 RD613	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 RD614	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 RD615	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 RD616	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD617	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD618	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 RD619	2007-001179	R-CHIP;8.2Kohm,5%,1/16W,DA,TP,1608	
....4 RD620	2007-000134	R-CHIP;33Kohm,5%,1/16W,DA,TP,1608	
....4 RD621	2007-001010	R-CHIP;51Kohm,5%,1/16W,DA,TP,1608	
....4 RD622	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
....4 RD623	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
....4 RD624	2007-001010	R-CHIP;51Kohm,5%,1/16W,DA,TP,1608	
....4 RD625	2007-001179	R-CHIP;8.2Kohm,5%,1/16W,DA,TP,1608	
....4 RD626	2007-000134	R-CHIP;33Kohm,5%,1/16W,DA,TP,1608	
....4 RD627	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 RD628	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD629	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD638	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
..2	AA95-00981B	ASSY-PCB 3D COMB;,WT-32Z5HD,K54A	
...3 CD10	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
...3 CD11	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD12	2401-002464	C-AL;47uF,20%,16V,BP,TP,8x11.5,5	
...3 CD18	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
...3 CD20	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD21	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD22	2203-001034	C-CERAMIC,CHIP;5.6nF,10%,50V,X7R,TP,1608	
...3 CD23	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
...3 CD24	2401-000455	C-AL;10uF,20%,35V,GP,TP,4x7mm,5mm	
...3 CD40	2301-000111	C-FILM,PEF;1.8nF,5%,50V,TP,6.5x3.0x5.5mm	
...3 CD41	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD42	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD43	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD44	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD45	2401-000455	C-AL;10uF,20%,35V,GP,TP,4x7mm,5mm	
...3 CD46	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD47	2401-000455	C-AL;10uF,20%,35V,GP,TP,4x7mm,5mm	
...3 CD50	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD51	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD52	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD53	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD54	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD55	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD56	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD57	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
...3 CD58	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD59	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
...3 CD60	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
...3 CD62	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD63	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD64	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
...3 CD66	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
...3 CD67	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD68	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
...3 CD69	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD71	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
...3 CD72	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD74	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD75	2203-000626	C-CERAMIC,CHIP;0.022nF,5%,50V,NP0,TP,160	
...3 CD80	2203-000357	C-CERAMIC,CHIP;0.15nF,5%,50V,NP0,TP,1608	
...3 CD81	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD84	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD85	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
...3 CD86	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD87	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD88	2203-000626	C-CERAMIC,CHIP;0.022nF,5%,50V,NP0,TP,160	
...3 CD89	2203-000626	C-CERAMIC,CHIP;0.022nF,5%,50V,NP0,TP,160	
...3 CD90	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD91	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CON01	3711-002705	CONNECTOR-HEADER;NOWALL,7P,1R,2.5mm,ANGL	
...3 CON02	3711-002703	CONNECTOR-HEADER;NOWALL,5P,1R,2.5mm,ANGL	
...3 DD01	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
...3 DD02	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
...3 DD03	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
...3 FD00	2909-001051	FILTER-LC;6MHz,6MHz,0.8dB,TP,5dB/6MHz,30	
...3 FD01	2909-001051	FILTER-LC;6MHz,6MHz,0.8dB,TP,5dB/6MHz,30	
...3 FD02	2909-001052	FILTER-LC;3.58MHz,3MHz,1.5dB,TP,11dB/1.0	
...3 FD03	2909-001051	FILTER-LC;6MHz,6MHz,0.8dB,TP,5dB/6MHz,30	
...3 IC01	1204-001556	IC-SEPARATOR;UPD64082GF,QFP,100P,-,PLAST	
...3 IC02	1105-001334	IC-DRAM;4E151612,1Mx16Bit,TSOP,44P,400	
...3 IC04	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
...3 JD01	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 JD04	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 LD01	2702-001095	INDUCTOR-RADIAL;18uH,10%,6x4mm	
...3 LD03	2702-001095	INDUCTOR-RADIAL;18uH,10%,6x4mm	
...3 LD05	2702-001096	INDUCTOR-RADIAL;33uH,10%,6x4mm	
...3 LD06	2702-001095	INDUCTOR-RADIAL;18uH,10%,6x4mm	
...3 LD07	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 LD09	2703-000271	INDUCTOR-SMD;4.7uH,10%,2x1.25x1.25mm	
...3 LD10	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
...3 PCB	AA41-00128E	PCB-3D COMB FILTER;CT-29A7DR,FR-4,2L,E,1	
...3 QD10	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD11	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...3 QD12	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...3 QD13	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD14	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...3 QD15	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...3 QD16	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...3 QD17	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD18	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...3 QD19	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD20	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...3 QD21	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD22	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...3 QD23	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD24	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD25	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...3 QD26	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD27	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD28	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...3 QD40	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD41	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	

Loc. No.	Code No.	Description ; Specification	Remark
...3 RD00	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD01	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD02	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
...3 RD03	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD04	2007-000094	R-CHIP;22Kohm,5%,1/16W,DA,TP,1608	
...3 RD05	2007-000088	R-CHIP;7.5Kohm,5%,1/16W,DA,TP,1608	
...3 RD06	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RD07	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RD08	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
...3 RD09	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
...3 RD10	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD11	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD12	2007-000094	R-CHIP;22Kohm,5%,1/16W,DA,TP,1608	
...3 RD13	2007-000088	R-CHIP;7.5Kohm,5%,1/16W,DA,TP,1608	
...3 RD14	2007-000309	R-CHIP;10ohm,5%,1/16W,DA,TP,1608	
...3 RD15	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RD16	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
...3 RD17	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
...3 RD18	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD19	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
...3 RD20	2007-001093	R-CHIP;620ohm,5%,1/16W,DA,TP,1608	
...3 RD21	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
...3 RD22	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RD23	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
...3 RD24	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
...3 RD25	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
...3 RD26	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
...3 RD27	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
...3 RD37	2007-001093	R-CHIP;620ohm,5%,1/16W,DA,TP,1608	
...3 RD38	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD39	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RD40	2007-000583	R-CHIP;22Kohm,1%,1/16W,DA,TP,1608	
...3 RD41	2007-000052	R-CHIP;10Kohm,1%,1/16W,DA,TP,1608	
...3 RD42	2007-000583	R-CHIP;22Kohm,1%,1/16W,DA,TP,1608	
...3 RD43	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
...3 RD50	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD51	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RD59	2007-000102	R-CHIP;100Kohm,5%,1/16W,DA,TP,1608	
...3 RD62	2007-000309	R-CHIP;10ohm,5%,1/16W,DA,TP,1608	
...3 RD63	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
...3 RD64	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RD65	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RD66	2007-000096	R-CHIP;30Kohm,5%,1/16W,DA,TP,1608	
...3 RD67	2007-000125	R-CHIP;3.9Kohm,5%,1/16W,DA,TP,1608	
...3 RD68	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
...3 RD69	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
...3 RD70	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
...3 RD71	2007-000234	R-CHIP;1.3Kohm,5%,1/16W,DA,TP,1608	
...3 RD72	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
...3 RD73	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD74	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
...3 RD75	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD76	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD77	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD78	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD79	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD82	2007-000309	R-CHIP;10ohm,5%,1/16W,DA,TP,1608	
...3 RD83	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
...3 RD84	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
...3 RD85	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
...3 RD86	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
...3 RD87	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
...3 RD88	2007-000211	R-CHIP;1.1Kohm,5%,1/16W,DA,TP,1608	
...3 RD89	2007-000113	R-CHIP;33ohm,5%,1/16W,DA,TP,1608	
...3 RD90	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD91	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
...3 RD92	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD93	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 RD94	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 RD95	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RD96	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
...3 RD97	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
...3 RD98	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 XTAL01	2801-000199	CRYSTAL-UNIT;20MHz,50ppm,28-AAA,16pF,50o	
...3	AA98-60005J	ASSY-SUB,PART;S51A,SOUND,NICAM,-	
....4	0202-001004	SOLDER-CREAM;SQ-2030M SZH-1,S63A,D0.04,6	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	

Loc. No.	Code No.	Description ; Specification	Remark
...3	AA63-40014A	SHIELD-CASE,T;-,SPTE,T0.5,SCT51A,-	
..2	AA95-00709A	ASSY-PCB,MICOM;,PCL545R,P54A	
...3 CN901	3703-001175	CONNECTOR-DIN;64P,2R,MALE,ANGLE,AU	
...3 IC901	AA09-00101A	IC MICOM;Z9037116PSC-OTP,SVP43J5M,52P,5	
...3 IC902	1103-001213	IC-EEPROM;M24C16-WBN6,2048x8Bit,SDIP,8P,	
...3 L903	2701-001032	INDUCTOR-AXIAL;100uH,10%,5x14mm	
...3 X901	2801-003224	CRYSTAL-UNIT;32.768KHZ,20PPM,28-AAY,12.5	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
...3	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	
...3	AA99-20080P	ASSY-PCB SUB,AUTO; AA95-00709A ,V	S.N.A
....4 C901	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
....4 C902	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C903	2203-000595	C-CERAMIC,CHIP;0.22nF,5%,50V,NP0,TP,2012	
....4 C904	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C905	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 C906	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C907	2301-000111	C-FILM,PEF;1.8nF,5%,50V,TP,6.5x3.0x5.5mm	
....4 C908	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
....4 C909	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
....4 C910	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
....4 C911	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
....4 C912	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C913	2201-000193	C-CERAMIC,DISC;0.01nF,0.25pF,50V,NP0,TP,	
....4 C914	2201-000578	C-CERAMIC,DISC;0.047nF,5%,50V,UJ,TP,5x3.	
....4 C915	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C916	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
....4 C917	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 C918	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C919	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
....4 C920	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C921	2203-000595	C-CERAMIC,CHIP;0.22nF,5%,50V,NP0,TP,2012	
....4 C925	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C926	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
....4 C927	2201-000578	C-CERAMIC,DISC;0.047nF,5%,50V,UJ,TP,5x3.	
....4 C928	2201-000578	C-CERAMIC,DISC;0.047nF,5%,50V,UJ,TP,5x3.	
....4 D901	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
....4 D902	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
....4 D903	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
....4 D904	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
....4 D905	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
....4 DZ903	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ904	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ905	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ911	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
....4 DZ912	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
....4 DZ913	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
....4 DZ916	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ917	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ918	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 F901	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 IC903	1203-001274	IC-VOL. DETECTOR;7545,TO-92,3P,-,PLASTIC	
....4 IC904	1203-000515	IC-VOL. DETECTOR;7042,TO-92,3P,177MIL,PL	
....4 L902	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L910	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L911	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L912	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L913	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 PCB	AA41-00338A	PCB-MICOM;PCL545R,FR-4,2L,A,1.6T,180X245	
....4 Q901	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q902	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q903	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q909	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q910	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q911	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 R901	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R902	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
....4 R903	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R904	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 R905	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R907	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R908	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R911	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 R912	2007-000076	R-CHIP;330ohm,5%,1/16W,DA,TP,1608	
....4 R913	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
....4 R914	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R915	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R916	2007-000081	R-CHIP;2.7Kohm,5%,1/16W,DA,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R917	2007-000081	R-CHIP;2.7Kohm,5%,1/16W,DA,TP,1608	
....4 R918	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
....4 R919	2007-000458	R-CHIP;18Kohm,5%,1/16W,DA,TP,1608	
....4 R920	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
....4 R921	2007-000087	R-CHIP;6.8Kohm,5%,1/16W,DA,TP,1608	
....4 R922	2007-000087	R-CHIP;6.8Kohm,5%,1/16W,DA,TP,1608	
....4 R923	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R924	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R925	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
....4 R926	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
....4 R927	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
....4 R928	2007-000081	R-CHIP;2.7Kohm,5%,1/16W,DA,TP,1608	
....4 R929	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
....4 R930	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R931	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R932	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R934	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R935	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R936	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R937	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R945	2007-001093	R-CHIP;620ohm,5%,1/16W,DA,TP,1608	
....4 R946	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 R947	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 R948	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R949	2007-000082	R-CHIP;3.3Kohm,5%,1/16W,DA,TP,1608	
....4 R950	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R951	2007-000082	R-CHIP;3.3Kohm,5%,1/16W,DA,TP,1608	
....4 R958	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R959	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R960	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R961	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R962	2007-000098	R-CHIP;56Kohm,5%,1/16W,DA,TP,1608	
....4 R963	2007-000082	R-CHIP;3.3Kohm,5%,1/16W,DA,TP,1608	
....4 R964	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R965	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R967	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R968	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R969	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R971	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
....4 R972	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
....4 R973	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R974	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R976	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R977	2007-000305	R-CHIP;10Mohm,5%,1/16W,DA,TP,1608	
....4 R978	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 R981	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
....4 R982	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
....4 R983	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	

ASSY CRT-(B)

1		*AA94-03342A	ASSY CRT-(B);P16LSG03BMB,+380MG,7,-,PCL5	S.N.A
..2	BC+AL	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	
..2		AA65-30114A	CLAMP-LOCK;NYLON 66,V2,NTR,-,PROJECTION,	
..2		AA64-01316B	CASE-COUPLER,BLUE;53,T2.0,AL SHEET,-,-	
..2		AA61-00602B	BRACKET-LENS,RB;PROJECTION,SECC ,T1.6,-,	
..2		AA61-00555B	HOLDER-LANS;53J8,PC ABS,BLK,-,-,GF20%	
..2		AA27-00151A	DEFLECTION YOKE;-,CDY-PT0702(X),PRT,P16L	
..2		AA91-00491A	ASSY-HOLDER,PACK;-,-,FILM PP RUBBER,54J8	
...3		AA60-00062B	SPACER-O,RING;53,SILICON,-,-,-,GRAY,-,-,	
...3		AA61-00477B	HOLDER-PACK;43,53,61J8,PP,-,HB,-,-	
..2		AA91-00449A	ASSY-BRACKET,CRT;-,-,SECC T1.0,PJT	
...3		AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	
...3		AA61-00478A	SPRING-WIRE,CRT;PJT,STS,-,-,-,-,-,-,-,-,	
...3		AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	
..2		AA67-10007A	LENS;-,DELTA,CLEAR,PJT,-,77,79,-	
..2		AA67-10005A	LENS-ASSY;-,DELTA,CLEAR,S4388,-,77,-	
..2		AA26-30006F	TRANS-FLYBACK;-,FWZ-50A001C,55,30KV	
..2		AA03-00202A	CRT MONO;P16LSG03BMB,-,7inch,-,-,-,FLAT	
..2		AA60-00074A	SPACER-DY;PJT,SILICON RUBBER,-,-,-,GRAY,	
..2		AA60-00063B	SPACER-CLENS;53,SILICON,-,-,-,GRAY,-,-,-	
..2		AA60-00061B	SPACER-CRT;53,SILICON,-,-,-,GRAY,-,-,-	
..2		AA39-00018A	LEAD CONNECTOR-ASSY;,1P,YFH800-01,YRH187	
..2		AA33-00008A	MAGNET CONVERGENCE;JH92LTU-36A,7inchPRT,	

ASSY CRT-(G)

0.1		*AA94-03341A	ASSY CRT-(G);P16LSG03HKA,+380MG,7,-,PCL5	S.N.A
..2	BC+AL	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	
..2		AA61-00476B	BRACKET-LENS;53,SECC,T1.6,-,-,-,-	
..2		AA61-00555B	HOLDER-LANS;53J8,PC ABS,BLK,-,-,GF20%	
..2		AA64-01315B	CASE-COUPLER,GREEN;43,53,61,T2.0,AL SHE	
..2		AA65-30114A	CLAMP-LOCK;NYLON 66,V2,NTR,-,PROJECTION,	
..2		AA67-10005A	LENS-ASSY;-,DELTA,CLEAR,S4388,-,77,-	
..2		AA67-10071A	LENS;DELTA 77 79,-,GREEN,C ELEMENT,	
..2		AA91-00449A	ASSY-BRACKET,CRT;-,-,SECC T1.0,PJT	
...3		AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	
...3		AA61-00478A	SPRING-WIRE,CRT;PJT,STS,-,-,-,-,-,-,-,-,	
...3		AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	
..2		AA91-00491A	ASSY-HOLDER,PACK;-,-,FILM PP RUBBER,54J8	
...3		AA60-00062B	SPACER-O,RING;53,SILICON,-,-,-,GRAY,-,-,	
...3		AA61-00477B	HOLDER-PACK;43,53,61J8,PP,-,HB,-,-	
..2		AA27-00151A	DEFLECTION YOKE;-,CDY-PT0702(X),PRT,P16L	
..2		AA03-00201A	CRT MONO;P16LSG03HKA,-,7inch,-,-,-,FLAT	
..2		AA26-30006F	TRANS-FLYBACK;-,FWZ-50A001C,55,30KV	
..2		AA39-00018A	LEAD CONNECTOR-ASSY;,1P,YFH800-01,YRH187	
..2		AA60-00061B	SPACER-CRT;53,SILICON,-,-,-,GRAY,-,-,-	
..2		AA60-00063B	SPACER-CLENS;53,SILICON,-,-,-,GRAY,-,-,-	
..2		AA60-00074A	SPACER-DY;PJT,SILICON RUBBER,-,-,-,GRAY,	

ASSY CRT-(R)

1		*AA94-03340A	ASSY CRT-(R);P16LSG03RJA,+380MG,7,-,PCL5	S.N.A
..2	BC+AL	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	
..2		AA65-30114A	CLAMP-LOCK;NYLON 66,V2,NTR,-,PROJECTION,	
..2		AA64-01314B	CASE-COUPLER,RED;53,T2.0,AL SHEET,-,-	
..2		AA61-00602B	BRACKET-LENS,RB;PROJECTION,SECC ,T1.6,-,	
..2		AA61-00555B	HOLDER-LANS;53J8,PC ABS,BLK,-,-,GF20%	
..2		AA27-00151A	DEFLECTION YOKE;-,CDY-PT0702(X),PRT,P16L	
..2		AA91-00491A	ASSY-HOLDER,PACK;-,-,FILM PP RUBBER,54J8	
...3		AA60-00062B	SPACER-O,RING;53,SILICON,-,-,-,GRAY,-,-,	
...3		AA61-00477B	HOLDER-PACK;43,53,61J8,PP,-,HB,-,-	
..2		AA91-00449A	ASSY-BRACKET,CRT;-,-,SECC T1.0,PJT	
...3		AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	
...3		AA61-00478A	SPRING-WIRE,CRT;PJT,STS,-,-,-,-,-,-,-,-,	
...3		AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	
..2		AA67-10008A	LENS;-,DELTA,RED,PJT,-,77,79,-	
..2		AA67-10005A	LENS-ASSY;-,DELTA,CLEAR,S4388,-,77,-	
..2		AA26-30006F	TRANS-FLYBACK;-,FWZ-50A001C,55,30KV	
..2		AA03-00200A	CRT MONO;P16LSG03RJA,-,7inch,-,-,-,FLAT	
..2		AA60-00074A	SPACER-DY;PJT,SILICON RUBBER,-,-,-,GRAY,	
..2		AA60-00063B	SPACER-CLENS;53,SILICON,-,-,-,GRAY,-,-,-	
..2		AA60-00061B	SPACER-CRT;53,SILICON,-,-,-,GRAY,-,-,-	
..2		AA39-00018A	LEAD CONNECTOR-ASSY;,1P,YFH800-01,YRH187	
..2		AA33-00008A	MAGNET CONVERGENCE;JH92LTU-36A,7inchPRT,	

ASSY CABINET MASK

1		*AA91-00654B	ASSY CABINET MASK;,HB,GRAY,GR801P+BL903P	
..2	C/FRON	AA63-00380A	COVER-CORNER;PJT,POLYESTER,-,-,CLR,#572	
..2		AA64-01495D	CABINET-MASK,SIDE;54J9(PCL5415R),GR801P+	
...3		AA64-01495A	CABINET-MASK,SIDE;54J8,L827.4 APCHUL,ABS	S.N.A
..2		AA64-01393N	CABINET-FRONT,MASK;54J9(PCL5415R),GR801P	
...3		AA64-01393A	CABINET-FRONT,MASK;54J8,L1099.4 APCHUL,A	S.N.A
..2		AA64-01393M	CABINET-FRONT,MASK;54J9(PCL5415R),GR801P	
...3		AA64-01393A	CABINET-FRONT,MASK;54J8,L1099.4 APCHUL,A	S.N.A
..2		AA61-00505B	HOLDER-CORNER;43,54,62J8,ABS,GRAY,HB	

ASSY-FRONT,BOT

1		*AA91-00653B	ASSY-FRONT,BOT;,VO G4309,HIPS,54J9(PCL54	
..2		AA64-70124C	BADGE-BRAND;AL,R2500,SILVER,L=70,SAMSUNG	

Loc. No.		Code No.	Description ; Specification	Remark
..2		AA64-01743B	CABINET-FRONT,BOT;54J9,HIPS,V0,G4309	S.N.A
..2		AA63-60131J	SPACER-FELT;54J9,62J9,FELT,-,-,-,-,T0.5,	S.N.A
..2		AA61-20129A	HOLDER-WIRE;-,-,NYLON-66,-,NTR,DAFC-2500	
..2		AA60-00077A	SPACER-DUAL,LOCK;54J8,#250,-,-,-,-,-,-,4	
..2		AA60-00071D	SPACER-JERSEY;54J9,JERSEY,-,-,-,GRAY,-,-	

ASSY-WOOD

1		*AA91-00620C	ASSY-WOOD;,WOOD,SDE8326R,54J9(PCL545R)	S.N.A
..2	AWTAWB	6006-001094	SCREW-ASS'Y WOOD;WW,HH,+,M7,L32,ZPC(YEL)	
..2		AA91-00474C	ASSY-WOOD,TOP;,WOOD SDE8326R,54J9(PCL545	S.N.A
...3	CW+CWT	AA60-10051B	SCREW-WOOD;-,SWRCH18A,M3.5,L11,RH,+,-,-	
...3	CWTHCW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	
...3		AA61-00674C	HOLDER-SCREEN;54 SIDE-L/R,ABS,BLK,HB,834	S.N.A
...3		AA64-01399B	CABINET-WOOD,TOP;54J9,SDE8326R,WOOD	S.N.A
...3		AA65-00014C	CLAMP-WIRE;54J9,SINGLE NYLON,BLK	
...3		AA61-00674B	HOLDER-SCREEN;54 TOP/BOTTOM,ABS,BLK,HB,1	S.N.A
...3		AA61-00644B	HOLDER-SENSOR;P54A(PRJT),PC,VIOLET	
...3		AA61-00507B	HOLDER-CABINET,WOOD;43,54,62J8,ABS,BLK,H	
...3		AA39-00220A	LEAD CONNECTOR ASSY;,12P,67096-012,67096	S.N.A
..2		AA91-00475C	ASSY-WOOD,BOT;,SDE8326R WOOD,54J9(PCL545	S.N.A
...3	CASCWB	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	
...3	HCMCWB	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	
...3	HW+CWB	AA60-10051B	SCREW-WOOD;-,SWRCH18A,M3.5,L11,RH,+,-,-	
...3	SPKCWB	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	
...3		AA61-00508C	HOLDER-JERSEY;54,62J9,ABS HB,BLK,HB,L40	S.N.A
...3		AA61-00508B	HOLDER-JERSEY;43,54,62J8,ABS,BLK,HB,-,-	
...3		AA61-00506B	HOLDER-CRT,MAIN;43,54,62J8,HIPS,BLK,HB,-	
...3		AA63-00348B	COVER-DUCT;54,62J8,HIPS,-,HB,BLK,-,-	
...3		AA61-70053A	RAIL-PCB;SVP-524JA,ABS,-,-,-,BLK,VO	
...3		AA61-00533B	BRACKET-GRILLE;43,54,62J8,SECC-1 ,T0.5,-	
...3		AA98-00049A	ASSY-LEAD,CON;-,LEAD-CON,CORE,AA39-20505	
....4		3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3		AA64-01402B	CABINET-WOOD,BOT;54J9,SDE8326R WOOD	S.N.A
...3		3001-001107	SPEAKER;20W,8ohm,95dB,1300Hz	
...3		3001-001134	SPEAKER;30W,8ohm,93dB,60Hz	
...3		AA39-00042A	LEAD CONNECTOR-ASSY;,2.2UF,REC,REC,200MM	
...3		AA60-00078A	SPACER-DUAL,LOCK;54J8,#250,-,-,-,-,-,-,4	
...3		AA61-00094C	HOLDER-RAIL;-,PCJ533R,ABS,HB,BLK,480	
...3		AA61-00097A	HOLDER-WIRE;-,-,NYLON 6/6,-,NTR,-	
...3		AA61-00458A	CASTER;-,-,TP4015-05 NYL,OH47,-,-,SR4	S.N.A

ASSY CHASSIS PART

1		*AA90-00757A	ASSY CHASSIS PART;P54A SEA,54J9	S.N.A
..2	PM+HC	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
..2	PP+HC	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
..2	PS+HC	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
..2		AA61-00504B	HOLDER-CHASSIS;43,54,62J8,ABS,GRAY,VO,-,	

ASSY CABINET

1		*AA90-00756B	ASSY CABINET;54J9,PCL5415RX/XAA	
..2	AC+BCM	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	
..2	APCAFB	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR	
..2	BM+CBT	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	
..2	CBB	AA64-01395L	INLAY-TERMINAL;J9,PS SHEET,T0.5,BLK,P54A	
..2	CBBAPT	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
..2	CBT	AA64-60449B	INLAY-COVER;SP-434JMF,PS,T0.5,149.3X69.5	
..2	CBT+CW	AA63-60002V	SPACER-FELT;-,FELT,-,-,-,BLK,T0.3,-,60X4	S.N.A
..2	CW+CBT	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
..2	CWBBCM	6006-001094	SCREW-ASS'Y WOOD;WW,HH,+,M7,L32,ZPC(YEL)	
..2	CWBCBB	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
..2	CWBCBS	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
..2	CWBCFB	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
..2	CWBHC	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
..2	FP+BCM	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	
..2	HV+BCM	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	
..2	WOODBO	AA63-60131A	SPACER-FELT;SVP403J,FELT,-,-,-,BLK,T0.5,	

Loc. No.		Code No.	Description ; Specification	Remark
..2		AA67-00080A	MIRROR-BACK;54J8,GLASS,940*686*673(132)*	
..2		AA67-00023A	SUN SCREEN,HC;-,53,H/C,A/S,PMMA,T=93%,T	
..2		AA65-30008A	CLAMP-CORD;PE,HB,BLK,-,-,-	
..2		AA64-60421C	INLAY-COVER;-,SEA,PS,T0.3,BLK,-,-	
..2		AA67-00116A	SCREEN-LENTI;53,-,T1,1123*852,-,-,TINT=1	
..2		AA91-00489B	ASSY-BRKT,MIRROR;-,-,SECC-1 T1.0,54J8	
...3		AA60-00073A	SPACER-FELT;54J8,FELT,-,-,-,-,T1.0,-,210	S.N.A
...3		AA61-00512B	BRACKET-MIRROR;43,53,61J8,SECC-1,T1.0,-,	S.N.A
..2		AA67-00116B	SCREEN-FRESNEL;53,-,T2,1125*854,-,-,-	
..2		AA64-01385C	CABINET-BACK,SIDE;545R,625R(SEA),HIPS,V0	S.N.A
..2		AA61-00600A	SPRING-EARTH;43J8,STS,,-,-,-,-,-,-,-,0.	
..2		AA61-00475B	BRACKET-CRT,MAIN;54,SECC,T1.6,-,-,-,-	
..2		AA60-00091N	SPACER-FELT;-,FELT,70X10,-,-,BLK,T1.0,-,	S.N.A
..2		AA60-00072B	SPACER-COVER,DUST;43,54,62J9,SPONGE 94HF	
..2		AA60-00069C	SPACER-SCREEN;43,54.62J8,ABS,-,-,-,BLK,-	S.N.A
..2		AA60-00069B	SPACER-SCREEN;43,54,62J8,ABS,-,-,-,BLK,-	S.N.A
..2		AA26-00101A	TRANS FBT;FWZ50A001E,-,-,-,-,-,-,-,-,-	
..2		AA64-01384B	CABINET-BACK,BOT;43,54,62J8,-,HIPS,VO,BL	
..2		AA64-01379B	CABINET-BACK,TOP;54J8,-,HIPS,HB,BLK	
..2		AA63-60131F	SPACER-FELT;PCJ612R,FELT,-,-,-,BLK,T0.5,	S.N.A
..2		AA61-20285A	HOLDER-BOX;-,3456,PP,VO,WHT,-	
..2		AA61-00642A	SPRING-EARTH,MAIN;PROJ(J7,J8,J9),STS,67,	
..2		AA61-00618B	GUIDE-FLOW;54J8,J7,ABS,-,-,-,BLK,HB	

REMOCON

1		*AA59-00176A	REMOCON;-,TM63,SHARK,51,L/GRAY,DO,-,-,	
..2		2802-000194	RESONATOR-CERAMIC;8MHz,1.0%,TP,8.5x4.5x5	
..2		AA09-00051A	IC-MCU;Z86L8808SSC-R501M,SZTM-822,ST,	

ASSY POWER CORD

1		*AA96-00156D	ASSY POWER CORD;-,EP2/YES(US),H/C 200MM,	
..2		AA61-20284A	HOLDER;-,P-CORD,PP,VO,BLK,KE-002	
..2		AA39-10007Y	POWER-CORD;-,EP2/YES,SPT-2 18AWGx2C,2.4m	
..2		3811-000401	WIRE-PVC CU;BCWA,300V,ROLL,17/0.16mm,#22	
..2		3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	

ASSY ACCESSORY

1		*AA94-03463A	ASSY ACCESSORY;PCL545RX/XAA,P54A,U.S.A,S	S.N.A
..2		AA69-30009C	BAG-SHEET;LDPE,T0.08,W150,L120,-,-,-	
..2		AA68-01413A	MANUAL USERS;PCL545R,ENG,W/P100(G),2(1),	
..2		AA68-01399A	MANUAL-GUIDE;,SEA,ENG,W/P 200(G),1,216X1	
..2		AA61-20126A	HOLDER-LEG;-,-,ABS,HB,BLK,-	
..2		AA39-00006A	CABLE-RCA;,3000MM	

7-2 PCL5415RX/XAA(PCL5415R3C/XAA)

Loc. No.	Code No.	Description ; Specification	Remark

ASSY-PCB,INTERFACE

1	*AA95-00968A	ASSY-PCB,INTERFACE;,PCL545R,P54A	
..2 CN05	3711-003641	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
..2 CN09	3711-002646	CONNECTOR-HEADER;BOX,7P,1R,2.5mm,STRAIGH	
..2 CNW09	AA39-20029L	LEAD CONNECTOR ASSY;,7P,67096-007,S,800M	
..2 IC01	1201-000229	IC-OP AMP;324,DIP,14P,300MIL,QUAD,100V/m	
..2 IC02	1002-001256	IC-A/D CONVERTER;AD7823YN,8Bits,DIP,8P,2	
..2 IC03	1203-001006	IC-VOLTAGE REGULATOR;78R05,TO-220F,4P,-,	
..2 PCB	AA41-00397B	PCB-AUTO CONVERGENCE;PCL545R,FR-1,1L,B,1	
..2	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
..2	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
..2	AA99-20088U	ASSY-PCB SUB,AUTO; AA95-00968A ,V	S.N.A
...3 C01	2201-000949	C-CERAMIC,DISC;0.005nF,0.5pF,50V,UJ,TP,4	
...3 C02	2201-000949	C-CERAMIC,DISC;0.005nF,0.5pF,50V,UJ,TP,4	
...3 C03	2201-000949	C-CERAMIC,DISC;0.005nF,0.5pF,50V,UJ,TP,4	
...3 C04	2201-000949	C-CERAMIC,DISC;0.005nF,0.5pF,50V,UJ,TP,4	
...3 C05	2401-001495	C-AL;47uF,20%,16V,GP,TP,5x11,5	
...3 C06	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
...3 C07	2301-000289	C-FILM,PEF;5.6nF,5%,50V,TP,7x6x3,5	
...3 C08	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
...3 C10	2401-000914	C-AL;22uF,20%,16V,GP,TP,5x11,5	
...3 C11	2401-001495	C-AL;47uF,20%,16V,GP,TP,5x11,5	
...3 C12	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
...3 C13	2401-001495	C-AL;47uF,20%,16V,GP,TP,5x11,5	
...3 C14	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
...3 C15	2401-000287	C-AL;100uF,20%,16V,WT,TP,6.3x11,5	
...3 C16	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
...3 D05	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 DZ01	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3 DZ02	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3 DZ03	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3 DZ04	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3 DZ05	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3 DZ06	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3 DZ07	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3 DZ08	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3 DZ09	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
...3 DZ10	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3 DZ11	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3 DZ12	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3 DZ13	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3 EF01	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 EF02	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 EF03	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 EF04	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 EF05	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 EF06	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 EF07	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 EF08	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 EF09	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 EF10	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 EF11	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 EF12	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 L01	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
...3 Q05	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 R13	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R14	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R15	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R16	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R17	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R18	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R19	2001-000645	R-CARBON;330KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R20	2001-000645	R-CARBON;330KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R21	2001-000645	R-CARBON;330KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R22	2001-000645	R-CARBON;330KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R23	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R24	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R25	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R26	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R27	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R30	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R31	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R32	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R33	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R34	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
...3 R35	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R36	2001-000210	R-CARBON;0ohm,5%,1/8W,AA,TP,1.8x3.2mm	
...3 R37	2001-000302	R-CARBON;10OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R38	2001-000302	R-CARBON;10OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R40	2001-000605	R-CARBON;3.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R41	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R42	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	

ASSY PCB POWER

1	*AA95-00799A	ASSY PCB POWER;PCL545R,P54A,53	
..2 C812	2401-000701	C-AL;2200uF,20%,250V,GP,-,35x70mm,1	
..2 C813	2401-000701	C-AL;2200uF,20%,250V,GP,-,35x70mm,1	
..2 C831	2306-000323	C-FILM,MPPF;2.2nF,5%,1.6KV,TP,28.5x15.5x	
..2 C862	2401-003076	C-AL;3300uF,20%,50V,WP,BK,18x35.5mm	
..2 C865	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
..2 C868	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
..2 C875	2401-002251	C-AL;470uF,20%,200V,GP,BK,25x40mm,1	
..2 CN802	AA39-00116A	LEAD CONNECTOR-ASSY;,12P,YBNH250-12,3515	
..2 CN803	AA39-00116A	LEAD CONNECTOR-ASSY;,12P,YBNH250-12,3515	
..2 CX801S	2306-000112	C-FILM,MPPF;100nF,20%,250V,BK,-,15mm	
..2 CX802S	2306-000112	C-FILM,MPPF;100nF,20%,250V,BK,-,15mm	
..2 CY801S	2201-000987	C-CERAMIC,DISC;2.2nF,20%,400V,Y5U,TP,12.	
..2 CY802S	2201-000987	C-CERAMIC,DISC;2.2nF,20%,400V,Y5U,TP,12.	
..2 D801S	AA96-50310A	ASSY-H/S;-,POWER,AA62-30150C,RBV606,-	
...3	AA62-30150C	HEAT SINK-ES;-,A6063 EXTR,-,WHT,40(24.5)	
...3	AA60-30003A	WASHER;-,-,-,T1.5,-,SBHG-1,-	
...3	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...3	0402-000549	DIODE-BRIDGE;RBV606,600V,6A,-,BK	
...3	0205-000129	GREASE-SILICON;SC102,JAPAN	
..2 D810	0402-000250	DIODE-RECTIFIER;RG4C,1000V,1A,-	
..2 D854	AA96-50153C	ASSY-H/S;-,-,AA62-30013D,FLM-G12S,-	
...3	0402-000233	DIODE-RECTIFIER;FML-G12S,200V,5A,-,-	
...3	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...3	AA62-30013D	HEAT SINK-ES;-,A6063 EXTR,-,-,55(21) T02	
..2 D855	AA96-50153C	ASSY-H/S;-,-,AA62-30013D,FLM-G12S,-	
..2 D856	AA96-50153C	ASSY-H/S;-,-,AA62-30013D,FLM-G12S,-	
..2 D857	AA96-50153C	ASSY-H/S;-,-,AA62-30013D,FLM-G12S,-	
..2 D858	AA96-50153C	ASSY-H/S;-,-,AA62-30013D,FLM-G12S,-	
..2 D859	AA96-50153A	ASSY-H/S;-,TR,AA62-30013D,FMG-26S,-	
...3	0402-000231	DIODE-RECTIFIER;FMG-G26S,600V,4A,TO-220F	
...3	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...3	AA62-30013D	HEAT SINK-ES;-,A6063 EXTR,-,-,55(21) T02	
..2 FD802S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
..2 FD804S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
..2 FD855S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
..2 FP801S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
..2 IC801S	AA96-00035A	ASSY-H/S;-,POWER,AA62-30181P,STR-F6656,	
...3	0205-000129	GREASE-SILICON;SC102,JAPAN	
...3	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...3	AA13-00018A	IC-HYBRID;-,STR-F6656,LF1351,5PIN,-,-	
...3	AA62-30181P	HEAT-SINK,ES;-,-,T1.0,WHITE,SCREW-HOLE(2	
..2 IC804	1203-001400	IC-POWER PRESCALER;SE110N,T0-220(SIP),3P	
..2 LX801S	AA29-30002L	FILTER-LINE NOISE;-,10mHMIN,5A,AC90~260V	
..2 LX802S	AA29-30002M	FILTER-LINE NOISE;-,1mHMIN,5A,AC90~260V,	
..2 LX803S	AA29-30002M	FILTER-LINE NOISE;-,1mHMIN,5A,AC90~260V,	
..2 NT801S	1404-001195	THERMISTOR-NTC;5.1ohm,15%,2900,27mW/C,BK	
..2 PC801S	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4,ST	
..2 PCB	AA41-00342A	PCB-POWER;PCL545R,CEM-1,1L,A,1.6T,330X24	
..2 R817	2009-001096	R-METAL PLATE;0.07ohm,5%,5W,CL,BK,5x14x1	
..2 R841	2008-001096	R-FUSIBLE(S);3.3OHM,5%,1/2W,AC,BK,2.5X6.	
..2 T801S	AA26-00099A	TRANS SWITCHING;EER5345,PCL544R,AC220V,1	
..2	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	

Loc. No.	Code No.	Description ; Specification	Remark
..2	AA99-20081T	ASSY-PCB SUB,AUTO; AA95-00799A ,V	S.N.A
...3 C809	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
...3 C814	2201-002041	C-CERAMIC,DISC;0.82nF,10%,2kV,Y5P,TP,9x5	
...3 C815	2201-000406	C-CERAMIC,DISC;0.27nF,10%,2kV,Y5P,TP,6.3	
...3 C816	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
...3 C817	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
...3 C818	2301-001216	C-FILM,PPF;47nF,5%,630V,TP,20x14.5x22,7.	
...3 C819	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
...3 C833	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
...3 C834	2401-003028	C-AL;100uF,20%,25V,WT,TP,6.3x11,5	
...3 C851	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
...3 C852	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
...3 C853	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
...3 C854	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
...3 C855	2401-000703	C-AL;2200uF,20%,25V,GP,-,12.5x25mm,	
...3 C861	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
...3 C864	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
...3 C871	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
...3 C872	2401-000703	C-AL;2200uF,20%,25V,GP,-,12.5x25mm,	
...3 C874	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
...3 C877	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
...3 D834	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3 D843	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3 D851	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
...3 D853	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
...3 DZ858	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
...3 F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
...3 F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
...3 F802A	3602-000114	FUSE-HOLDER;-,-,30mohm	
...3 F802B	3602-000114	FUSE-HOLDER;-,-,30mohm	
...3 F804A	3602-000114	FUSE-HOLDER;-,-,30mohm	
...3 F804B	3602-000114	FUSE-HOLDER;-,-,30mohm	
...3 F855A	3602-000114	FUSE-HOLDER;-,-,30mohm	
...3 F855B	3602-000114	FUSE-HOLDER;-,-,30mohm	
...3 FD805S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
...3 FD806S	3601-001065	FUSE-AXIAL LEAD;125V,3.5A,FAST-ACTING,CE	
...3 FD854S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
...3 FD871S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
...3 L806	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 L807	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 L808	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
...3 L810	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 L811	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 L812	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 L813	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 L814	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
...3 L815	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 L816	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 L831	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
...3 L832	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
...3 L851	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 L857	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 L859	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 Q801	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 R808	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R808A	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R812	2003-002170	R-METAL OXIDE(S);15Kohm,5%,2W,AG,TP,3.9x	
...3 R814	2003-002170	R-METAL OXIDE(S);15Kohm,5%,2W,AG,TP,3.9x	
...3 R815	2003-000512	R-METAL OXIDE(S);15Kohm,5%,3W,AA,TP,6x16	
...3 R815A	2003-000512	R-METAL OXIDE(S);15Kohm,5%,3W,AA,TP,6x16	
...3 R832	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 R834	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R837	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R838	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R855	2001-001196	R-CARBON(S);9.1KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R871	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
...3 R872	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
...3 R873	2004-004366	R-METAL(S);1.3Kohm,1%,1/2W,AA,TP,2.5x6.5	
...3 R874	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R875	2004-004366	R-METAL(S);1.3Kohm,1%,1/2W,AA,TP,2.5x6.5	
...3 RP801S	2002-001010	R-COMPOSITION;1.8Mohm,5%,1/2W,AA,TP,3.7x	
...3 RX801S	2002-001011	R-COMPOSITION;3.3Mohm,5%,1/2W,AA,TP,3.7x	
...3 RY801S	2002-001013	R-COMPOSITION;4.7Mohm,5%,1/2W,AA,TP,3.7x	
...3 VP801S	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
...3 VX801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	

ASSY-PCB,TERMINAL

Loc. No.	Code No.	Description ; Specification	Remark
1	*AA95-00716A	ASSY-PCB,TERMINAL;,PCL545R,P54A	
..2 CNT01	3711-003630	CONNECTOR-HEADER;BOX,32P,2R,2.54mm,ANGLE	
..2 CNT02	3711-003630	CONNECTOR-HEADER;BOX,32P,2R,2.54mm,ANGLE	
..2 CNY01	3711-003601	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,ANGLE,	
..2 IC703	0904-001121	IC-I/O SUPPORT CHIP;8574,8BIT,DIP,16P,30	
..2 IC705	0801-000213	IC-CMOS LOGIC;4052,MULTIPLEXER,DIP,16P,3	
..2 ICD01	1204-001510	IC-SEPARATOR;EL4583CN,DIP,16P,-,PLASTIC,	
..2 ICD02	0801-000284	IC-CMOS LOGIC;4528,MULTIVIBRATOR,DIP,16P	
..2 ICD03	1204-001510	IC-SEPARATOR;EL4583CN,DIP,16P,-,PLASTIC,	
..2 JKV02	3722-001039	JACK-RCA;9P,3.4mm,SN,BLK,#16-22	
..2 JKV03	3722-001382	JACK-RCA;5P(9P),3.4MM,NI,R/W/G/BLUE,-	
..2 JKV04	3722-001382	JACK-RCA;5P(9P),3.4MM,NI,R/W/G/BLUE,-	
..2 JKV08	3722-000544	JACK-VHS;4P,11.5mm,AG,BLK,N	
..2 RD18	2001-000954	R-CARBON;750KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..2	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	
..2	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
..2	AA99-20091R	ASSY-PCB SUB,AUTO; AA95-00716A ,V	S.N.A
...3 C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
...3 C702	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 C704	2203-000815	C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP,160	
...3 C705	2203-000815	C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP,160	
...3 C706	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C707	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C708	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C709	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C710	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C711	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C712	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 C713	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C714	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C715	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C716	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
...3 C717	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 C718	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C719	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C720	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C721	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C722	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C723	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 C724	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C727	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C730	2401-002299	C-AL;4.7uF,20%,50V,GP,TP,5x7,5	
...3 C731	2401-002299	C-AL;4.7uF,20%,50V,GP,TP,5x7,5	
...3 C732	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
...3 C733	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
...3 C734	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
...3 C735	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
...3 C736	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
...3 C737	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
...3 C738	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
...3 C739	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 C740	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
...3 C741	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 C760	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11,5	
...3 C761	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11,5	
...3 C762	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11,5	
...3 C763	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11,5	
...3 C764	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11,5	
...3 C765	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11,5	
...3 C766	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11,5	
...3 C767	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11,5	
...3 C768	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C769	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C780	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
...3 CD01	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
...3 CD02	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD03	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
...3 CD04	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD05	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
...3 CD06	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
...3 CD07	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD08	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD09	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	

Loc. No.	Code No.	Description ; Specification	Remark
...3 CD10	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
...3 CD11	2401-000404	C-AL;10uF,20%,16V,BP,TP,5x11,5	
...3 CD12	2401-000404	C-AL;10uF,20%,16V,BP,TP,5x11,5	
...3 CD13	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD14	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD15	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD16	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
...3 CD17	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
...3 CD18	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
...3 IC701	1001-001030	IC-VIDEO SWITCH;TDA6920X,-,SOP,28P,300MI	
...3 IC702	1001-001030	IC-VIDEO SWITCH;TDA6920X,-,SOP,28P,300MI	
...3 L701	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 L702	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 L711	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 L720	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 L721	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 L722	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 L723	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 L724	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 L725	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 L726	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 LD01	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 LD02	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 LD04	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 PCB	AA41-00343A	PCB-TERMINAL;PCL545R,FR-4,2L,A,1.6T,180X	
...3 Q701	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
...3 Q702	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
...3 Q703	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
...3 Q704	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
...3 Q705	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
...3 Q706	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
...3 Q707	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
...3 Q711	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
...3 Q712	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
...3 Q714	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
...3 QD01	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD02	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD03	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD04	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 R701	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R702	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R703	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R704	2007-001157	R-CHIP;750ohm,5%,1/16W,DA,TP,1608	
...3 R705	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R706	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R707	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
...3 R708	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R709	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R710	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R712	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R713	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R714	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R715	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R716	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R717	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R718	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R719	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R720	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R721	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R722	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R723	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R724	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R725	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R726	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R727	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R728	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R729	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R734	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
...3 R735	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
...3 R740	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R741	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R742	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R743	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R744	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R745	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R748	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
...3 R749	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
...3 R750	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
...3 R751	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
...3 R752	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
...3 R753	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
...3 R754	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
...3 R755	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
...3 R756	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
...3 R757	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
...3 R758	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
...3 R759	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
...3 R760	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R761	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
...3 R762	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R763	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R764	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
...3 R765	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R766	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R767	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R768	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R769	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R774	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R775	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 R776	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R777	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R779	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R780	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R788	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R791	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R792	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R793	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R794	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R795	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 R796	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 R797	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 R820	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 R821	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 R829	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R830	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 RD01	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
...3 RD02	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
...3 RD03	2007-000094	R-CHIP;22Kohm,5%,1/16W,DA,TP,1608	
...3 RD04	2007-000096	R-CHIP;30Kohm,5%,1/16W,DA,TP,1608	
...3 RD05	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RD06	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
...3 RD07	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
...3 RD08	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
...3 RD09	2007-000087	R-CHIP;6.8Kohm,5%,1/16W,DA,TP,1608	
...3 RD11	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
...3 RD12	2007-000913	R-CHIP;43Kohm,5%,1/16W,DA,TP,1608	
...3 RD13	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
...3 RD14	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
...3 RD15	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
...3 RD16	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
...3 RD17	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
...3 RD19	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
...3 RD20	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
...3 RD21	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RN701	2011-000160	R-NETWORK;10Kohm,5%,1/8W,A,SIP,9P,TP	
...3 RP784	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 RY701	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 RY702	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 RY703	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	

ASSY-PCB,V/M

1		*AA95-00714A	ASSY-PCB,V/M;,PCL545R,P54A
..2	CNZ101	AA39-20055E	LEAD CONNECTOR-ASSY;,6P,YBNH025-06,67096
..2	PCB	AA41-00344A	PCB-VM;PCL545R,FR-1,1L,A,1.6T,245X245
..2	QZ101	AA96-50162F	ASSY-H/S;-,POWER,AA62-30013E,2SA1011,30
...3		0502-000131	TR-POWER;2SA1011-D,PNP,1.2W,TO-220,-,60
...3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW
...3		AA62-30013E	HEAT-SINK,ES;-,A6063 EXTR,-,-,30(21) T02
..2	QZ102	AA96-50162G	ASSY-H/S;-,AMP,AA62-30013E,2SC2344,30MM
...3		0502-000153	TR-POWER;2SC2344-D,NPN,1.2W,TO-220,-,60

Loc. No.	Code No.	Description ; Specification	Remark
...3	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...3	AA62-30013E	HEAT-SINK,ES;-,A6063 EXTR,-,-,30(21) T02	
..2 RZ120	2008-001097	R-FUSIBLE(S);33OHM,5%,1/2W,AC,BK,2.5X6.5	
..2	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
..2	AA99-20080N	ASSY-PCB SUB,AUTO; AA95-00714A ,V	S.N.A
...3 CNZ102	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,STRAIGH	
...3 CNZ103	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,STRAIGH	
...3 CNZ104	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,STRAIGH	
...3 CZ101	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
...3 CZ102	2401-001157	C-AL;33uF,20%,160V,GP,TP,12.5x20,5	
...3 CZ103	2201-000516	C-CERAMIC,DISC;4.7nF,+100-0%,500V,Y5U,TP	
...3 CZ104	2201-000193	C-CERAMIC,DISC;0.01nF,0.25pF,50V,NP0,TP,	
...3 CZ105	2201-000516	C-CERAMIC,DISC;4.7nF,+100-0%,500V,Y5U,TP	
...3 CZ106	2201-000193	C-CERAMIC,DISC;0.01nF,0.25pF,50V,NP0,TP,	
...3 CZ107	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11,5	
...3 CZ108	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
...3 CZ109	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
...3 CZ110	2201-000604	C-CERAMIC,DISC;0.056nF,+100-0%,500V,SL,T	
...3 CZ111	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
...3 CZ112	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
...3 DZ101	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3 DZ102	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 DZ103	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3 DZ104	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3 DZ105	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 DZ106	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 LZ101	2701-000002	INDUCTOR-AXIAL;100uH,10%,4.2x9.8mm	
...3 QZ103	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
...3 QZ104	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 QZ105	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 QZ106	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 RFZ101	2008-001086	R-FUSIBLE(S);3.3ohm,5%,2W,AG,TP,3.9x12mm	
...3 RZ101	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RZ102	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RZ103	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
...3 RZ104	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RZ105	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RZ106	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RZ107	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ108	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RZ109	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RZ110	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RZ111	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
...3 RZ112	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
...3 RZ113	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
...3 RZ114	2003-000532	R-METAL OXIDE(S);18ohm,5%,2W,AF,TP,4x12m	
...3 RZ115	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ116	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ117	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RZ118	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RZ119	2001-000554	R-CARBON;270OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ121	2001-000666	R-CARBON;33OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ122	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
...3 RZ123	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
..2	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
..2	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
..2	AA33-00008A	MAGNET CONVERGENCE;JH92LTU-36A,7inchPRT,	

ASSY-PCB,SUB

1	*AA95-00705A	ASSY-PCB,SUB;,PCL545R,P54A	
..2 C432	2306-000267	C-FILM,MPPF;8.2nF,5%,1.6KV,TP,28.5x18.5x	
..2 C438	2306-000267	C-FILM,MPPF;8.2nF,5%,1.6KV,TP,28.5x18.5x	
..2 C445	2401-001622	C-AL;6.8uF,20%,50V,BP,TP,16x25mm,7.	
..2 C481	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
..2 C491	2306-000322	C-FILM,MPPF;12nF,5%,1.6KV,TP,29x20.5x13,	
..2 C876	2401-000787	C-AL;220uF,20%,160V,GP,TP,16x31.5mm	
..2 CN202	AA39-00116A	LEAD CONNECTOR-ASSY;,12P,YBNH250-12,3515	
..2 CN801	AA39-00180A	LEAD CONNECTOR ASSY;,14P,YBNH250-14,3515	
..2 CN802	3711-003974	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
..2 CN803	3711-003974	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
..2 CNW801	AA39-20061G	LEAD CONNECTOR-ASSY;,3P,YFH800-03,S,100M	
..2 CNZ02	AA39-00115A	LEAD CONNECTOR-ASSY;,10P,YBNH250-10,3515	
..2 CR430S	2301-001343	C-FILM,MPPF;3.9nF,5%,2kV,TP,29x9.5x16mm,	
..2 CR431S	2301-001343	C-FILM,MPPF;3.9nF,5%,2kV,TP,29x9.5x16mm,	
..2 CR436S	2306-000235	C-FILM,MPPF;560nF,5%,400V,TP,26*22.5*14,	
..2 CR471S	2301-001091	C-FILM,MPPF;470nF,5%,400V,TP,26x21.5x14.	
..2 CR473S	2306-000322	C-FILM,MPPF;12nF,5%,1.6KV,TP,29x20.5x13,	
..2 CR474S	2306-000326	C-FILM,MPPF;4.7nF,5%,1.6KV,TP,28.5x16x9m	
..2 CS803	2401-003370	C-AL;47uF,20%,450V,GP,BK,16X35.5,7.	
..2 CY811S	2201-000446	C-CERAMIC,DISC;3.3nF,20%,400V,Y5U,TP,15x	
..2 CY812S	2201-000446	C-CERAMIC,DISC;3.3nF,20%,400V,Y5U,TP,15x	
..2 D464	0402-000236	DIODE-RECTIFIER;GI824,400V,5A,-,TP	
..2 D811S	0402-000102	DIODE-BRIDGE;D2SB60,600V,1.5A,-	
..2 IC301	AA96-50406A	ASSY-H/S;-,-,AA62-30180K,LA7845,-	
...3	0205-000129	GREASE-SILICON;SC102,JAPAN	
...3	1204-000517	IC-VERTIVAL DEF.;LA7845,SIP,7P,-,PLASTIC	
...3	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...3	AA62-30180K	HEAT SINK-ES;-,A6063 EXTR,-,WHT,50/13,-,	
..2 IC421	1203-000165	IC-POSI.ADJUST REG.;78R12,TO-220,3P,-,-,	
..2 IC430	1203-000162	IC-POSI.ADJUST REG.;317,TO-220,3P,-,PLAS	
..2 IC431	1201-000191	IC-OP AMP;4558,DIP,8P,300MIL,DUAL,20V/mV	
..2 IC471	1203-000610	IC-PWM CONTROLLER;494,DIP,16P,300MIL,PLA	
..2 ICS801	AA13-00024A	IC-HYBRID;-,TNY253P,-,8PIN,-,-	
..2 ICS807	AA96-00111P	ASSY H/S;-,MAIN,AA62-30013L,KA278RA05,F	
...3	1203-001978	IC-VOLTAGE REGULATOR;KA278RA05,TO-220F,4	
...3	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...3	AA62-30013L	HEATSINK-ES;-,-,-,-,44/22,-,WHT,-,-,-,-	
..2 ICZ103	AA96-00034A	ASSY-H/S;-,CONVERGENCE,AA62-30173D,STK3	
...3	0205-000129	GREASE-SILICON;SC102,JAPAN	
...3	1201-001225	IC-VIDEO AMP;392,SIP,22P,-,TRIPLE,-,PLAS	
...3	6003-001021	SCREW-TAPTITE;RH,+,B,M3,L15,ZPC(YEL),SWR	
...3	AA62-30173D	HEAT SINK-ES;-,-,T1.0,WHITE,SCREW-HOLE(2	
..2 ICZ104	AA96-00034A	ASSY-H/S;-,CONVERGENCE,AA62-30173D,STK3	
..2 L432	AA27-00095A	COIL HORIZ. WIDTH;-,600uH,YL9N 15x27.5 C	
..2 L434	AA27-00174A	COILHORIZ.WIDTH;600UH,600UH,SB-5SOS6X20,	
..2 L435	AA27-10001C	COIL-CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
..2 L482	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
..2 L494	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
..2 L854	AA27-10001C	COIL-CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
..2 L860	AA27-10001C	COIL-CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
..2 L862	AA27-10001C	COIL-CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
..2 L872	AA27-10001C	COIL-CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
..2 L874	AA27-10002L	COIL-CHOKE;-,24UH,K,-,2A,-,24UH-K,10X10M	
..2 LC431S	AA27-30003M	COIL-LINEARLITY;-,5uH,OWA14x15,USRC0.1x6	
..2 PC811S	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4,ST	
..2 PCB	AA41-00340B	PCB-SUB;PCL545R,CEM-1,1L,B,1.6T,330X24	
..2 Q353	0502-000442	TR-POWER;2SC4636RB,NPN,2W,TO-220,ST,10-	
..2 Q431	AA96-00033E	ASSY H/S;-,H-OUT,AA62-30173C,2SC5446, F	
...3	AA02-00007A	MICA;DPM-04,MICA,22x29x0.15mm	
...3	AA62-30173C	HEAT SINK-ES;-,-,T1.0,WHITE,SCREW-HOLE(2	
...3	AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,-,SBHG	
...3	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...3	0502-001175	TR-POWER;2SC5446,NPN,200000mW,TO-3PL,BK	
...3	0402-001296	DIODE-RECTIFIER;FMP-3FU,1.5KV,5A,TO-3PF,	
...3	0205-000129	GREASE-SILICON;SC102,JAPAN	
..2 Q433	AA96-50407A	ASSY-H/S;-,-,AA62-30154G,KSD73Y,-	
...3	0205-000129	GREASE-SILICON;SC102,JAPAN	
...3	0502-000298	TR-POWER;KSD73,NPN,30000mW,TO-220,TP,12	
...3	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...3	AA62-30154G	HEAT SINK-ES;-,A6063 EXTR,-,WHT,50/16,-,	
..2 Q441	AA96-50383F	ASSY-H/S;-,-,AA62-30180D,2SD921,-	
...3	0205-000129	GREASE-SILICON;SC102,JAPAN	
...3	0502-001104	TR-POWER;2SD921,NPN,80W,TO-3P,BK,700-	
...3	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...3	AA62-30180D	HEAT SINK-ES;-,A6063 EXTR.,2,WHT,50mm,-,	
..2 Q473	AA96-00037A	ASSY-H/S;-,-,AA62-30181N,2SC4125, IRFS6	
...3	0502-001100	TR-POWER;2SC4125,NPN,70W,TO-3PML,BK,8-	
...3	AA62-30181N	HEAT-SINK,ES;-,-,T1.0,WHITE,SCREW-HOLE(2	
...3	AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,-,SBHG	
...3	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...3	0505-001202	FET-SILICON;IRFS640A,N,200V,9.8A,0.18ohm	
...3	0205-000129	GREASE-SILICON;SC102,JAPAN	
..2 RL811S	3501-001053	RELAY-POWER;5Vdc,530mW,10A,1FormA,15mS,5	
..2 RL812S	3501-001040	RELAY-POWER;12VDC,500mW,10A,1FormA,15mS,	
..2 T431	AA26-50001U	TRANS-HORIZ.DRIVE;-,28mH,105uH,4uH,ER28x	
..2 T432	AA26-00012A	TRANS-DUMMY;-,1.3MH,EER4445,110V/7.6V/21	
..2 T433	AA26-00011A	TRANS-DUMMY;-,3.5MH,EE2834,-,BK	
..2 T444S	AA26-00100A	TRANS FBT;FFA97513L,CT29A7DR,0.3mH,-,-,-	
..2 T461	AA26-50001V	TRANS-HORIZ.DRIVE;-,6.0mH,113uH,4uH,EI19	
..2 T481	AA26-00091A	TRANS-HV-STORAGE;4mH,-,14P,830uH,180V,10	

Loc. No.	Code No.	Description ; Specification	Remark
..2 TS811S	AA26-00055B	TRANS SWITCHING;,HLK436W,AC80V,AC80~280V	
..2	AA65-30104B	CLAMP-WIRE;NYLON 66,V2,BLK,W2 Z5,ALL MOD	
..2	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
..2	AA99-20081X	ASSY-PCB SUB,AUTO; AA95-00705A ,V	S.N.A
...3 C301	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
...3 C302	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
...3 C303	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
...3 C304	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
...3 C305	2201-002022	C-CERAMIC,DISC;0.005nF,0.25pF,500V,NP0,T	
...3 C307	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
...3 C308	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
...3 C309	2305-000285	C-FILM,MPEF;220NF,5%,100V,TP,10.5X5.5X15	
...3 C311	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
...3 C351	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
...3 C352	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
...3 C353	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
...3 C354	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
...3 C355	2201-000991	C-CERAMIC,DISC;0.56nF,10%,2kV,Y5P,TP,7.5	
...3 C405	2201-000558	C-CERAMIC,DISC;0.47nF,10%,50V,Y5P,TP,5x3	
...3 C406	2201-000370	C-CERAMIC,DISC;0.22nF,10%,50V,Y5P,TP,4x3	
...3 C412	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
...3 C413	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
...3 C417	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
...3 C418	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
...3 C419	2201-000180	C-CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3,5	
...3 C426	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
...3 C427	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
...3 C428	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
...3 C429	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
...3 C437	2401-003114	C-AL;4.7uF,20%,250V,WT,TP,10x16,5	
...3 C450	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
...3 C451	2401-001160	C-AL;33uF,20%,160V,GP,-,16x35mm,7.5	
...3 C452	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
...3 C453	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
...3 C454	2401-001428	C-AL;470uF,20%,50V,GP,TP,10x20,5	
...3 C455	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
...3 C456	2401-001527	C-AL;47uF,20%,250V,HR,TP,13x25mm,5m	
...3 C457	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
...3 C458	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
...3 C459	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
...3 C460	2303-000331	C-FILM,PPF;4.7nF,5%,630V,TP,19.5x12x7,7.	
...3 C467	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
...3 C468	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
...3 C469	2201-000180	C-CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3,5	
...3 C472	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
...3 C476	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
...3 C477	2301-000213	C-FILM,PEF;220nF,5%,250V,TP,21.5x11,7.5	
...3 C478	2301-000020	C-FILM,PEF;27nF,5%,100V,TP,7.3x4x12.5mm,	
...3 C479	2301-000200	C-FILM,PEF;2.2nF,5%,200V,TP,11.0x6.0x9.0	
...3 C480	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
...3 C483	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
...3 C484	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
...3 C487	2305-000178	C-FILM,MPEF;10nF,5%,100V,TP,-,5mm	
...3 C488	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
...3 C489	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
...3 C490	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
...3 C492	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
...3 C857	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
...3 C866	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
...3 C869	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
...3 C873	2401-001998	C-AL;1000uF,20%,25V,GP,TP,10x20,5mm	
...3 CN401	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5MM,STRAIGH	
...3 CN403	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,STRAIGH	
...3 CR401S	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
...3 CR402S	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,	
...3 CR403S	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,	
...3 CS804	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
...3 CS805	2401-001101	C-AL;330uF,20%,16V,GP,TP,8x11.5,5	
...3 CS807	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
...3 CS808	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
...3 CS809	2201-000556	C-CERAMIC,DISC;0.47nF,10%,500V,Y5P,TP,5.	
...3 CS812	2201-002076	C-CERAMIC,DISC;0.068nF,5%,1kV,SL,TP,8x4m	
...3 CS813	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
...3 CS814	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
...3 CZ101	2401-001428	C-AL;470uF,20%,50V,GP,TP,10x20,5	
...3 CZ102	2401-001428	C-AL;470uF,20%,50V,GP,TP,10x20,5	
...3 CZ108	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	

Loc. No.	Code No.	Description ; Specification	Remark
...3 CZ109	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
...3 CZ110	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
...3 CZ111	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
...3 CZ112	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
...3 CZ113	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
...3 CZ114	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
...3 CZ115	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
...3 CZ116	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
...3 CZ117	2201-000327	C-CERAMIC,DISC;2.2nF,10%,50V,Y5V,TP,6.5x	
...3 CZ118	2201-000327	C-CERAMIC,DISC;2.2nF,10%,50V,Y5V,TP,6.5x	
...3 CZ126	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
...3 CZ127	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
...3 CZ128	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
...3 CZ132	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
...3 CZ133	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
...3 CZ134	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
...3 CZ135	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
...3 CZ136	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
...3 CZ137	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
...3 CZ138	2201-000327	C-CERAMIC,DISC;2.2nF,10%,50V,Y5V,TP,6.5x	
...3 CZ139	2201-000327	C-CERAMIC,DISC;2.2nF,10%,50V,Y5V,TP,6.5x	
...3 CZ151	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
...3 CZ152	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
...3 CZ153	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
...3 CZ154	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
...3 CZ155	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
...3 CZ156	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
...3 D302	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3 D353	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 D384	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
...3 D385	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 D433	0402-000537	DIODE-RECTIFIER;RH1A,600V,0.6A,DO-204AC	
...3 D434	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3 D435	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
...3 D436	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 D440	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
...3 D441	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
...3 D442	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 D443	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 D444	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3 D445	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
...3 D451	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
...3 D453	0402-001286	DIODE-RECTIFIER;RP1H,2000V,.1A,-,TP	
...3 D472	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3 D474	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3 D477	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 D478	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 D479	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 D480	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
...3 D484	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
...3 D501	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
...3 DR401S	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 DR402S	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 DR404S	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
...3 DS805	0404-001056	DIODE-SCHOTTKY;RK16,60V,1.5A,DO-204AC,TP	
...3 DS807	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3 DS809	0404-001056	DIODE-SCHOTTKY;RK16,60V,1.5A,DO-204AC,TP	
...3 DZ301	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
...3 DZ304	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
...3 DZ305	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
...3 DZ306	0403-001330	DIODE-ZENER;MTZJ30A,26.99-28.39V,500mW,D	
...3 DZ307	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
...3 DZ386	0403-001316	DIODE-ZENER;MTZJ3.0A,2.85-3.07V,500mW,DO	
...3 DZ395	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
...3 DZ400	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
...3 DZ413	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
...3 DZ473	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
...3 DZ474	0403-000734	DIODE-ZENER;TZP15B,15V,14.7-16.5V,1W,DO-	
...3 DZ481	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
...3 DZ482S	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
...3 DZ483	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
...3 DZ801	0406-001106	DIODE-TVS;P6KE300A,285/-/315V,600W,DO-20	
...3 DZ802	0406-001106	DIODE-TVS;P6KE300A,285/-/315V,600W,DO-20	
...3 DZ803	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
...3 DZ804	0403-000716	DIODE-ZENER;MTZJ4.7B,4.7V,4.55-4.8V,500m	
...3 DZ805	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
...3 DZ806	0403-000691	DIODE-ZENER;R2K,170V,170-200V,-,-,TP	

Loc. No.	Code No.	Description ; Specification	Remark
...3 DZ807	0403-000734	DIODE-ZENER;TZP15B,15V,14.7-16.5V,1W,DO-	
...3 ICR01S	1203-001217	IC-POSI.ADJUST REG.;431,TO-92,3P,4.58MIL	
...3 L341	2701-000116	INDUCTOR-AXIAL;10uH,10%,4.2x9.8mm	
...3 L480	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 L481	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
...3 L483	2901-000299	FILTER-EMI ON BOARD;-,6A,UL/CSA,-,9x7.5,	
...3 L492	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
...3 L493	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
...3 L495	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
...3 L499	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 LS801	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 LS802	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 LZ107	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
...3 LZ108	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
...3 LZ109	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
...3 LZ110	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
...3 LZ111	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
...3 LZ112	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
...3 Q301	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 Q350	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 Q351	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 Q352	0501-000366	TR-SMALL SIGNAL;KSC2330-Y,NPN,1W,TO-92L,	
...3 Q381	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 Q382	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 Q401	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 Q402	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 Q421	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 Q422	0505-000156	FET-SILICON;IRF620,N,200V,5A,0.8ohm,50W,	
...3 Q432	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
...3 Q435	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
...3 Q436	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 Q451	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 Q461	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 Q471	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 Q472	0505-000156	FET-SILICON;IRF620,N,200V,5A,0.8ohm,50W,	
...3 Q474	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 Q481	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 Q482	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
...3 QR401S	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
...3 QS801	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
...3 QS802	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 R301	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
...3 R302	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
...3 R303	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
...3 R305	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
...3 R306	2003-002129	R-METAL OXIDE(S);3.9ohm,5%,2W,AF,TP,3.9x	
...3 R307	2003-001036	R-METAL OXIDE(S);3.3ohm,5%,2W,AF,TP,3.9x	
...3 R308	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
...3 R310	2003-002009	R-METAL OXIDE(S);390ohm,5%,2W,AF,TP,3.9x	
...3 R312	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R313	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R314	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R332	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
...3 R333	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
...3 R334	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
...3 R350	2001-000878	R-CARBON;6.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R351	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R352	2001-000837	R-CARBON;51KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R353	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R354	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R355	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R356	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R357	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R358	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R359	2001-000109	R-CARBON(S);4700HM,5%,1/2W,AA,TP,2.4X6.4	
...3 R360	2001-000723	R-CARBON;4.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R361	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
...3 R362	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
...3 R363	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
...3 R364	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
...3 R365	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
...3 R366	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W,AA,TP,3.7x	
...3 R384	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R385	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R386	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R387	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R388	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R389	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R397	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R405	2009-001109	R-TEMPERATURE;240ohm,5%,1/4W,AA,TP,2.3x6	
...3 R406	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP,2.4x6.	
...3 R407	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
...3 R408	2004-001402	R-METAL(S);6.8Kohm,1%,1/2W,AA,TP,2.4x6.4	
...3 R409	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 R410	2001-000052	R-CARBON(S);3.3KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R411	2008-001113	R-FUSIBLE(S);0.22ohm,10%,2W,AG,TP,3.9x12	
...3 R412	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R413	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
...3 R414	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R415	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R416	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R417	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R418	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R419	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R420	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R421	2003-002159	R-METAL OXIDE;150OHM,5%,1W,AG,TP,4.3X12M	
...3 R422	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 R423	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R424	2008-000299	R-FUSIBLE(S);47ohm,5%,2W,AF,TP,3.9x10mm	
...3 R425	2003-000417	R-METAL OXIDE(S);1.2Kohm,5%,3W,AA,TP,6x1	
...3 R426	2003-002153	R-METAL OXIDE;4.7OHM,5%,2W,AG,TP,6X16MM	
...3 R427	2003-002152	R-METAL OXIDE;1OHM,5%,2W,AG,TP,6X16MM	
...3 R427A	2003-002152	R-METAL OXIDE;1OHM,5%,2W,AG,TP,6X16MM	
...3 R428	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
...3 R428A	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
...3 R429	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
...3 R430	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
...3 R432	2001-001144	R-CARBON(S);4.7KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R433	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R434	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R435	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
...3 R436	2001-001182	R-CARBON(S);7.5KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R437	2008-001087	R-FUSIBLE(S);1.8ohm,5%,2W,AG,TP,3.9x12mm	
...3 R438	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R439	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R440	2008-000282	R-FUSIBLE;0.47ohm,5%,1W,AA,TP,3.9x12mm	
...3 R441	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
...3 R442	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
...3 R442A	2008-000254	R-FUSIBLE(S);0.68ohm,5%,2W,AF,TP,3.9x10m	
...3 R443	2003-002156	R-METAL OXIDE;560OHM,5%,2W,AG,TP,6X16MM	
...3 R443A	2003-002156	R-METAL OXIDE;560OHM,5%,2W,AG,TP,6X16MM	
...3 R444	2003-000995	R-METAL OXIDE(S);3.3Kohm,5%,2W,AF,TP,3.9	
...3 R445	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
...3 R446	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R447	2008-000254	R-FUSIBLE(S);0.68ohm,5%,2W,AF,TP,3.9x10m	
...3 R448	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R449	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
...3 R454	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R455	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R456	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R458	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R459	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 R460	2003-002044	R-METAL OXIDE(S);100ohm,5%,1W,AF,TP,2.5x	
...3 R461	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R462	2008-001079	R-FUSIBLE;4.7OHM,5%,2W,AF,TP,3.9X10MM	
...3 R463	2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP,3.9x	
...3 R464	2003-002158	R-METAL OXIDE;0.68OHM,5%,1W,AG,TP,4.3X12	
...3 R465	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
...3 R466	2004-001386	R-METAL(S);16.9Kohm,1%,1/2W,AA,TP,2.4x6.	
...3 R467	2004-001986	R-METAL(S);35.7Kohm,1%,1/2W,AA,TP,2.4x6.	
...3 R468	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R469	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
...3 R470	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 R471	2004-002011	R-METAL(S);110Kohm,1%,1/2W,AA,TP,2.4x6.4	
...3 R472	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
...3 R473	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
...3 R474	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R475	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R482	2001-001031	R-CARBON;91KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R483	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R484	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R485	2008-001137	R-FUSIBLE(S);3.3ohm,5%,1W,AF,TP,3.9x10mm	
...3 R486	2008-001018	R-FUSIBLE(S);0.47ohm,10%,2W,AF,TP,3.9x10	
...3 R487	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.	Code No.	Description ; Specification	Remark
...3 R488	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R489	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R490	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R491	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 R492	2001-000508	R-CARBON;220KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R494	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R495	2001-000262	R-CARBON;1.8MOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R501	2004-001376	R-METAL(S);11Kohm,1%,1/2W,AA,TP,2.4x6.4m	
...3 R502	2004-001369	R-METAL(S);1.2Kohm,1%,1/2W,AA,TP,2.4x6.4	
...3 R856	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R857	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 RF801S	2008-000282	R-FUSIBLE;0.47ohm,5%,1W,AA,TP,3.9x12mm	
...3 RFS802	2008-000294	R-FUSIBLE(S);33ohm,5%,2W,AF,TP,3.9x10mm	
...3 RFZ19	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
...3 RFZ20	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
...3 RFZ21	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
...3 RFZ22	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
...3 RFZ50	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
...3 RFZ51	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
...3 RFZ52	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
...3 RFZ53	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
...3 RR401S	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
...3 RR402S	2103-001086	VR-SEMI;100KOHM,25%,0.3W,TOP	
...3 RR403S	2004-004001	R-METAL(S);180Kohm,1%,1/2W,AA,TP,2.5x6.5	
...3 RR404S	2004-004046	R-METAL(S);430Kohm,1%,1/2W,AA,TP,2.5x6.5	
...3 RR405S	2004-004046	R-METAL(S);430Kohm,1%,1/2W,AA,TP,2.5x6.5	
...3 RR406S	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
...3 RR407S	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RR408S	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RR409S	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
...3 RR410S	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RR471S	2103-001024	VR-SEMI;50Kohm,25%,0.3W,TOP	
...3 RS801	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 RS803	2001-001159	R-CARBON(S);510OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RS804	2001-001182	R-CARBON(S);7.5KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 RS805	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
...3 RS806	2001-001159	R-CARBON(S);510OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RS807	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RS808	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RS809	2001-001099	R-CARBON(S);2.7KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 RS810	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 RS811	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 RZ104	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RZ105	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RZ106	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RZ107	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RZ108	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RZ109	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RZ110	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ111	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ112	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ113	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RZ114	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ115	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RZ116	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ117	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RZ118	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ123	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
...3 RZ124	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
...3 RZ125	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
...3 RZ126	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
...3 RZ127	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
...3 RZ128	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
...3 RZ129	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
...3 RZ129A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
...3 RZ130	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
...3 RZ130A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
...3 RZ131	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
...3 RZ131A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
...3 RZ132	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
...3 RZ132A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
...3 RZ133	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ134	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ135	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ136	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RZ137	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ138	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RZ139	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ140	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RZ141	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ142	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
...3 RZ143	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
...3 RZ144	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
...3 RZ145	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
...3 RZ146	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
...3 RZ147	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
...3 RZ148	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
...3 RZ148A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
...3 RZ149	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
...3 RZ149A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
...3 VP811S	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
..2	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	

ASSY-CONTROL

1		*AA95-01068A	ASSY-CONTROL;,PCL545R,P54A	S.N.A
..2	PCB+A/	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
..2		AA91-00652A	ASSY-CONTROL;,HIPS HB BLK,SEA,PCL545R(54	S.N.A
...3	KC+PC	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR	
...3	KNOPOW	AA61-60003J	SPRING-CS;-,SUS304,0.5,OD6,H12,N7,-,-,-	
...3		AA64-01750B	KNOB POWER;54J9,62J9,ABS HB,GRAY,SV-012P	S.N.A
...3		AA64-01752B	INDICATOR LED;54J9,62J9,ACRYL,CLR	S.N.A
...3		AA64-01755B	WINDOW REMOCON;54J9,62J9,PC,SEMI VIOLET	S.N.A
...3		AA64-01749B	KNOB-CONTROL,HOLDER;54J9,62J9,ABS HB,BLK	S.N.A
...3		AA64-01747B	DOOR-AV;54J9,62J9,HIPS HB,BLK,BL903P	S.N.A
...3		AA64-01746B	PANEL-CONTROL;54J9,62J9,HIPS HB,BLK,LG80	S.N.A
...3		AA64-01396E	INLAY-AV;43,54,62J8,PS SHEET,T0.5,-,BLK	
..2		AA95-00961A	ASSY-PCB,CONTROL;-,PCL534R,P54A,-,-,-	S.N.A
...3	CNW01	AA39-00223A	LEAD CONNECTOR ASSY;,11P,67096-011,35155	
...3	CNY01	3711-003353	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,ANGLE,	
...3	CNY02	3711-000447	CONNECTOR-HEADER;3WALL,3P,1R,2.5mm,ANGLE	
...3	CNYW02	AA39-20016A	LEAD CONNECTOR-ASSY;,3P,67096-003,S,200,	
...3	CY01	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
...3	DZY02	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3	DZY03	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3	LEDY01	0601-001381	LED;ROUND,RED/GRN,5.0MM,650/563NM	
...3	PCB	AA41-00425A	PCB-CONTROL;SVP54J8SR,FR-1,1L,A,1.6T,245	S.N.A
...3	QY01	0504-000123	TR-DIGITAL;KSR1010,NPN,300mW,10K,TO-92,T	
...3	RMY01	AA59-60002B	MODULE-REMOCON;-,ORC-50HF,38KHZ,940MM,ME	
...3	RY02	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	RY03	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	RY04	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	RY05	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	RY06	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	RY07	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4M	
...3	RY08	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
...3	RY09	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
...3	SWY01	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY02	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY03	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY04	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY05	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY06	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY07	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY08	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3		3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
..2		AA95-00998A	ASSY-PCB,A/V FRONT;,PCL545R,P54A	S.N.A
...3	CNY01A	3711-003974	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
...3	CNY702	3711-000447	CONNECTOR-HEADER;3WALL,3P,1R,2.5mm,ANGLE	
...3	CNYW01	AA39-00231A	LEAD CONNECTOR ASSY;,12P,35155-1200,6709	
...3	JK101	3722-000544	JACK-VHS;4P,11.5mm,AG,BLK,N	
...3	JK102	3722-001164	JACK-RCA;3P,3.4mm,SN,WH:YE:RE,#16-22	
...3	PCB	AA41-00453A	PCB-AV FRONT;PCL545R,FR-1,1L,A,1.6T,330X	S.N.A
...3	RK101	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	SW101	3404-000208	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
...3		3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	

Loc. No.	Code No.	Description ; Specification	Remark

ASSY-PCB,SENSOR

1		*AA95-01031A	ASSY-PCB,SENSOR;,PCL545R,P54A	
..2	CN01	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,STRAIGH	
..2	D01	0603-001067	PHOTO DIODE;-,10V,560nm,BK	
..2	PCB	AA41-00433A	PCB-SENSOR;PCL545R,CEM-1,1L,A,1.6T,245X2	
..2	Q01	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..2		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
..2		AA99-20090G	ASSY-PCB SUB,AUTO; AA95-01031A ,V	S.N.A
...3	R01	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	R02	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	R03	2001-000454	R-CARBON;2.2MOHM,5%,1/8W,AA,TP,1.8X3.2M	

ASSY PCB CRT

1		*AA95-00970A	ASSY PCB CRT;-,P54A,54,U.S.A,PCL545R	
..2	C511	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
..2	C541	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
..2	C571	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
..2	CN501	3711-003051	CONNECTOR-HEADER;BOX,8P,1R,2.5mm,STRAGHT	
..2	CN502	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5mm,STRAGH	
..2	CN502B	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5mm,STRAGH	
..2	CN503	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5mm,STRAGH	
..2	CN503B	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5mm,STRAGH	
..2	CNW401	AA39-20027C	LEAD CONNECTOR-ASSY;,6P,67096-006,S,500,	
..2	CNW501	AA39-00127B	LEAD CONNECTOR-ASSY;,8P,35155-0800,S,600	
..2	CNW502	AA39-00112A	LEAD CONNECTOR-ASSY;,10P,35155-1000,S,30	
..2	CNW503	AA39-00112A	LEAD CONNECTOR-ASSY;,10P,35155-1000,S,30	
..2	FOCUS-	AA39-20115B	LEAD CONNECTOR-ASSY;,1P,BUSHING,-,700MM,	
..2	FOCUS-	AA39-20115A	LEAD CONNECTOR-ASSY;,1P,BUSHING,500,3239	
..2	FOCUS-	AA39-20115A	LEAD CONNECTOR-ASSY;,1P,BUSHING,500,3239	
..2	GBW-GN	3811-000446	WIRE-PVC CU;TCWA,600V,ROLL,17/0.16mm,#22	
..2	GBW-SC	3811-000480	WIRE-PVC CU;BCWA,1KV,ROLL,17/0.16mm,#22,	
..2	GNDWIR	AA39-00198A	LEAD CONNECTOR ASSY;,3P,YFH800-03,YFH800	
..2	GRW-GN	3811-000446	WIRE-PVC CU;TCWA,600V,ROLL,17/0.16mm,#22	
..2	GRW-SC	3811-000480	WIRE-PVC CU;BCWA,1KV,ROLL,17/0.16mm,#22,	
..2	IC501	AA96-50151B	ASSY-H/S;-,AMP,AA61-10060A,TDA6111Q,-	
...3		1201-001131	IC-VIDEO AMP;6111,SIP,9P,-,SINGLE,-,PLAS	
...3		6001-000057	SCREW-MACHINE;RH,+,M3,L6,ZPC(BLK),SWRCH1	
...3		6021-000222	NUT-HEXAGON;2C,M3,ZPC(YEL),SM20C 1	
...3		AA61-10060A	BRACKET-TR;W3220,CUS-1 1/2H,T0.5,-,-,-,-	
..2	IC531	AA96-50151B	ASSY-H/S;-,AMP,AA61-10060A,TDA6111Q,-	
..2	IC561	AA96-50151B	ASSY-H/S;-,AMP,AA61-10060A,TDA6111Q,-	
..2	PCB	AA41-00406A	PCB-CRT;PCL545R,FR-1,1L,A,1.6T,245X245	
..2	SG502	AA27-00084A	COIL;S-23,-,-,-,-,-,-,-,S-23,5000Mohm	
..2	SG532	AA27-00084A	COIL;S-23,-,-,-,-,-,-,-,S-23,5000Mohm	
..2	SG562	AA27-00084A	COIL;S-23,-,-,-,-,-,-,-,S-23,5000Mohm	
..2	V501	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U	
..2	V531	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U	
..2	V561	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U	
..2	VR501	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
..2	VR531	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
..2	VR561	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
..2		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
..2		3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
..2		AA99-20087L	ASSY-PCB SUB,AUTO; AA95-00970A ,V	S.N.A
...3	C502	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
...3	C503	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
...3	C504	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
...3	C505	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
...3	C506	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
...3	C507	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
...3	C510	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
...3	C512	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
...3	C513	2201-000983	C-CERAMIC,DISC;1nF,10%,2kV,Y5P,TP,9x5,7.	
...3	C514	2201-000599	C-CERAMIC,DISC;0.56nF,10%,500V,Y5P,TP,5.	
...3	C532	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
...3	C533	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
...3	C534	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
...3	C535	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
...3	C536	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
...3	C537	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
...3	C540	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
...3	C542	2201-000983	C-CERAMIC,DISC;1nF,10%,2kV,Y5P,TP,9x5,7.	
...3	C543	2201-000599	C-CERAMIC,DISC;0.56nF,10%,500V,Y5P,TP,5.	
...3	C562	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
...3	C563	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
...3	C564	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
...3	C565	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
...3	C566	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
...3	C567	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
...3	C570	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
...3	C572	2201-000983	C-CERAMIC,DISC;1nF,10%,2kV,Y5P,TP,9x5,7.	
...3	C573	2201-000599	C-CERAMIC,DISC;0.56nF,10%,500V,Y5P,TP,5.	
...3	CN401	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5MM,STRAIGH	
...3	D501	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3	D502	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3	D503	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
...3	D504	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3	D509	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3	D510	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3	D531	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3	D532	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3	D533	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
...3	D561	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3	D562	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3	D563	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
...3	DZ501	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
...3	DZ502	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
...3	DZ503	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
...3	DZ531	0403-001317	DIODE-ZENER;MTZJ3.0B,3.01-3.22V,500mW,DO	
...3	DZ532	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
...3	DZ533	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
...3	DZ561	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
...3	DZ562	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
...3	DZ563	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
...3	L501	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
...3	L531	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
...3	L561	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
...3	Q501	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
...3	Q502	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3	Q504	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
...3	Q531	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
...3	Q533	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
...3	Q561	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
...3	Q563	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
...3	R500	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	R502	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R503	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R504	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	R505	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R506	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
...3	R507	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R508	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
...3	R509	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	R510	2001-001000	R-CARBON;82KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R511	2001-000313	R-CARBON;11KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R513	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
...3	R514	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
...3	R515	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
...3	R516	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R517	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
...3	R518	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
...3	R519	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
...3	R520	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
...3	R521	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
...3	R522	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W,AA,TP,3.7x	
...3	R523	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W,AA,TP,3.7x	
...3	R524	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
...3	R526	2001-000539	R-CARBON;24KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R527	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R528	2001-001015	R-CARBON;9.1KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	R529	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
...3	R532	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R533	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R536	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
...3	R537	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R538	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
...3	R540	2001-000837	R-CARBON;51KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.	Code No.	Description ; Specification	Remark
...3 R541	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R543	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
...3 R544	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R545	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
...3 R546	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R547	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R548	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
...3 R549	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
...3 R550	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
...3 R551	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R552	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W,AA,TP,3.7x	
...3 R553	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W,AA,TP,3.7x	
...3 R554	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 R555	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R556	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R557	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R559	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
...3 R562	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R563	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R564	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R566	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
...3 R567	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R568	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R569	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R570	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R571	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R572	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
...3 R573	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
...3 R574	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R575	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
...3 R576	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R577	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R578	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
...3 R579	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
...3 R580	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
...3 R581	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
...3 R582	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W,AA,TP,3.7x	
...3 R583	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W,AA,TP,3.7x	
...3 R584	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 R589	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
...3 SG351	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
...3 SG501	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
...3 SG503	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
...3 SG533	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
...3 SG561	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
...3 SG563	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	

ASSY PCB MAIN(OPT)

1	*AA94-03388D	ASSY PCB MAIN(OPT);PCL5415RX/XAA,P54A,U.	
..2 C664	2401-001068	C-AL;3300uF,20%,50V,GP,BK,22x40,10	
..2 C665	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
..2 CG-BOT	AA63-00397B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,SOUN	
..2 CG-TOP	AA63-00396B	SHIELD CASE-TOP;PRJT,P54A,SPTE,T0.5,SOUN	
..2 CN01	3703-001150	CONNECTOR-DIN;32P,2R,FEMALE,STRAIGHT,AUF	
..2 CN02	3703-001150	CONNECTOR-DIN;32P,2R,FEMALE,STRAIGHT,AUF	
..2 CNM01	3703-001187	CONNECTOR-DIN;64P,2R,FEMALE,STRAIGHT,AU	
..2 CNS01	3703-001187	CONNECTOR-DIN;64P,2R,FEMALE,STRAIGHT,AU	
..2 CNT01	3710-001208	CONNECTOR-SOCKET;32P,2R,2.54mm,STRAIGHT,	
..2 CNT02	3710-001208	CONNECTOR-SOCKET;32P,2R,2.54mm,STRAIGHT,	
..2 CNZ01	3703-001150	CONNECTOR-DIN;32P,2R,FEMALE,STRAIGHT,AUF	
..2 DW-BOT	AA63-00395B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,D/W	
..2 DW-TOP	AA63-00394B	SHIELD CASE-TOP;PRJT P54A,SPTE,T0.5,D/W	
..2 IC102	AA96-00110C	ASSY-H/S;-,-,AA62-30013K,SI-3090C,-	
...3	1203-000577	IC-VOLTAGE REGUATOR;3090,ZIP,5P,-,PLASTI	
...3	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...3	AA62-30013K	HEATSINK-ES;-,-,-,-,44/18,-,WHT,A6063 EX	
..2 IC104	AA96-00110A	ASSY-H/S;-,-,AA62-30013K,SI-3050C,-	
...3	1203-000203	IC-POSI.ADJUST REG.;3050,TO-220,5P,-,PLA	
...3	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...3	AA62-30013K	HEATSINK-ES;-,-,-,-,44/18,-,WHT,A6063 EX	
..2 IC106	AA96-00110A	ASSY-H/S;-,-,AA62-30013K,SI-3050C,-	
..2 IC655	AA96-00038A	ASSY-H/S;-,SOUND AMP,AA62-30173E,TDA726	
...3	0205-000129	GREASE-SILICON;SC102,JAPAN	
...3	1201-001026	IC-POWER AMP;7265,ZIP,11P,19.6MIL,DUAL,1	
...3	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...3	AA62-30173E	HEAT-SINK,ES;-,-,T1.0,WHITE,SCREW-HOLE(1	
..2 ICZ101	AA96-00110A	ASSY-H/S;-,-,AA62-30013K,SI-3050C,-	
..2 ICZ102	1203-000121	IC-NEGA.FIXED REG.;7906,TO-220,3P,-,PLAS	
..2 L601	AA29-00004A	FILTER-LINE NOISE;-,20UH,3A,AC80-260V,TQ	
..2 L602	AA27-10001C	COIL-CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
..2 MI-BOT	AA63-00397B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,SOUN	
..2 MI-TOP	AA63-00396B	SHIELD CASE-TOP;PRJT,P54A,SPTE,T0.5,SOUN	
..2 SO-BOT	AA63-00397B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,SOUN	
..2 SO-TOP	AA63-00396B	SHIELD CASE-TOP;PRJT,P54A,SPTE,T0.5,SOUN	
..2 TU103S	AA59-00164A	MODULE-RF,SPLITTER;-,UMX-NT-005,-,2IN/3O	
..2 WIRE	AA65-30018A	CLAMP-WIRE;NYLON-66,-,-,DATL-600,DONG-A,	
..2	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
..2	AA99-30217G	ASSY-PCB ROBOT; AA94-03388D ,ER	S.N.A
...3 CN201	3711-003974	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
...3 CN501	3711-003051	CONNECTOR-HEADER;BOX,8P,1R,2.5mm,STRAGHT	
...3 CN801	3711-003975	CONNECTOR-HEADER;BOX,14P,1R,2.5mm,STRAIG	
...3 CN901	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
...3 CNZ02	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5mm,STRAGH	
...3 IC103	AA96-50147B	ASSY-H/S;-,TR,AA62-30012B,KA7808,-	
....4	1203-000293	IC-POSI.FIXED REG.;7808,TO-220,3P,-,PLAS	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
....4	AA62-30012B	HEAT SINK-ES;-,A6063 EXTR,-,-,45(16) T02	
...3 IC107	AA96-00111L	ASSY-H/S;-,-,AA62-30013L,KA78R12,-	
....4	1203-000165	IC-POSI.ADJUST REG.;78R12,TO-220,3P,-,-	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
....4	AA62-30013L	HEATSINK-ES;-,-,-,-,44/22,-,WHT,-,-,-,-	
...3 TU101S	AA40-00032A	TUNER-F/S;TCPN3081PC09A(S),NTSC,TR,181CH	
...3 TU102S	AA40-00032A	TUNER-F/S;TCPN3081PC09A(S),NTSC,TR,181CH	
...3	AA99-10211S	ASSY-PCB MAIN,AUTO; AA99-30217G ,V	S.N.A
....4 C100	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
....4 C101	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
....4 C102	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
....4 C103	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 C104	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
....4 C105	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 C106	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C107	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C110	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
....4 C111	2201-000180	C-CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3,5	
....4 C117	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C118	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C119	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
....4 C120	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
....4 C121	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
....4 C122	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
....4 C123	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C124	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C125	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C126	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
....4 C127	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C128	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C129	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
....4 C130	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
....4 C131	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
....4 C132	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 C133	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C134	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C135	2401-003034	C-AL;220uF,20%,16V,WT,TP,8x11.5,5	
....4 C136	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C137	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
....4 C138	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
....4 C140	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C142	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
....4 C144	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
....4 C145	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
....4 C146	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
....4 C147	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
....4 C149	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
....4 C150	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
....4 C151	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
....4 C152	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
....4 C153	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C154	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C155	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C157	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C191	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
....4 C666	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C667	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
....4 C668	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
....4 C676	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
....4 C686	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
....4 C687	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
....4 C688	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
....4 C689	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C690	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C691	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
....4 C701	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C801	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
....4 C901	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
....4 C902	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C903	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 CN101	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,STRAIGH	
....4 CN601	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	
....4 CN902	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,STRAIGH	
....4 CNY01	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5MM,STRAIGH	
....4 CZ101	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
....4 CZ102	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
....4 CZ103	2401-000689	C-AL;2200uF,20%,16V,GP,TP,13x25,5	
....4 CZ104	2401-000689	C-AL;2200uF,20%,16V,GP,TP,13x25,5	
....4 CZ105	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 CZ106	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 CZ107	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 CZ108	2201-000982	C-CERAMIC,DISC;10nF,+80-20%,50V,Y5V,TP,4	
....4 CZ109	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
....4 CZ110	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
....4 D603	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D604	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D605	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D606	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D664	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D665	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D701	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D702	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D703	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DZ128	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 DZ665	0403-001039	DIODE-ZENER;MA2560,56V,52-60V,1W,DO-41,T	
....4 DZ701	0403-001140	DIODE-ZENER;RD10ESAB-T4,10V,9.19-10.30V,	
....4 DZ801	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
....4 L100	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
....4 L101	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
....4 L102	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
....4 L103	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
....4 L104	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
....4 L105	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
....4 L107	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
....4 L108	2701-001007	INDUCTOR-AXIAL;24uH,10%,4.5x14mm	
....4 L110	2701-000116	INDUCTOR-AXIAL;10uH,10%,4.2x9.8mm	
....4 L111	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L112	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L113	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L603	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L604	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L605	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L901	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
....4 LDZ101	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
....4 LDZ102	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
....4 LZ101	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ102	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ103	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
....4 LZ104	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
....4 PCB	AA41-00332B	PCB-MAIN;PCL545R,FR-1,1L,A,1.6T,330X245	
....4 Q601	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q666	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q668	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q701	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q702	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 R102	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R103	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R104	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R105	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R106	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R107	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R110	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R111	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R112	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R113	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R115	2001-000869	R-CARBON;56OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R117	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R602	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R603	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R604	2001-001168	R-CARBON(S);6.8KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R605	2001-001106	R-CARBON(S);220KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R661	2004-001970	R-METAL;1.8Kohm,1%,1/2W,AA,TP,6.5x2.5m	
....4 R662	2004-001970	R-METAL;1.8Kohm,1%,1/2W,AA,TP,6.5x2.5m	
....4 R663	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R664	2004-001970	R-METAL;1.8Kohm,1%,1/2W,AA,TP,6.5x2.5m	
....4 R665	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R666	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R669	2001-001121	R-CARBON(S);3.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R670	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R671	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R672	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R673	2001-001086	R-CARBON(S);18KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R673A	2001-001144	R-CARBON(S);4.7KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R681	2004-001970	R-METAL;1.8Kohm,1%,1/2W,AA,TP,6.5x2.5m	
....4 R682	2004-002019	R-METAL(S);33Kohm,1%,1/2W,AA,TP,2.5x6.5m	
....4 R683	2004-002019	R-METAL(S);33Kohm,1%,1/2W,AA,TP,2.5x6.5m	
....4 R685	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
....4 R686	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
....4 R687	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R689	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R690	2001-001144	R-CARBON(S);4.7KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R691	2001-001144	R-CARBON(S);4.7KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R701	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R702	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R703	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R704	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R888	2003-001098	R-METAL OXIDE(S);22Kohm,5%,3W,AA,TP,6x16	
....4 RF101	2008-001116	R-FUSIBLE(S);0.68ohm,10%,2W,AG,TP,3.9x12	
....4 RF104	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
....4 RF121	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
....4 RZ01	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ02	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RZ101	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ102	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..2	AA39-20010F	LEAD CONNECTOR-ASSY;,1P,YFH800-01,S,700,	
..2	AA39-20577A	LEAD CONNECTOR-ASSY;,6(3)P,YFH806-06,800	
..2	AA95-00996A	ASSY-PCB,DW-SRC;,PCL545R,P54A	
...3 CN01	3703-001124	CONNECTOR-DIN;32P,2R,MALE,ANGLE,AUF	
...3 CN02	3703-001124	CONNECTOR-DIN;32P,2R,MALE,ANGLE,AUF	
...3 CX01	2801-004019	CRYSTAL-UNIT;20.25MHz,30ppm,28-AAM,13pF,	
...3 DX01	2801-003811	CRYSTAL-UNIT;24.576MHZ,20PPM,28-AAM,30PF	
...3 PX01	2801-004019	CRYSTAL-UNIT;20.25MHz,30ppm,28-AAM,13pF,	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
...3	AA99-20088T	ASSY-PCB SUB,AUTO; AA95-00996A ,V	S.N.A
....4 CC01	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
....4 CC02	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CC03	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
....4 CC04	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
....4 CC05	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 CC06	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
....4 CC07	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CC08	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
....4 CC09	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 CC10	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CC11	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CC12	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CC13	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CC14	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CC15	2203-001646	C-CERAMIC,CHIP;3pF,0.5pF,50V,NPO,TP,2012	
....4 CC16	2203-001646	C-CERAMIC,CHIP;3pF,0.5pF,50V,NPO,TP,2012	
....4 CC17	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
....4 CC18	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
....4 CC19	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 CC20	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
....4 CC21	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 CC22	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
....4 CC23	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 CC24	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	

Loc. No.	Code No.	Description ; Specification	Remark
....4 CC25	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 CC26	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 CC27	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 CC28	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 CC29	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
....4 CC30	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 CC31	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
....4 CC32	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
....4 CC33	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
....4 CC35	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 CC36	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 CC37	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
....4 CC38	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
....4 CC39	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
....4 CC40	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
....4 CC41	2203-000998	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,160	
....4 CC42	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 CC43	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CC44	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 CC45	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
....4 CC47	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CC48	2203-005384	C-CERAMIC,CHIP;4700nF,+80-20%,10V,Y5V,TP	
....4 CC49	2203-005384	C-CERAMIC,CHIP;4700nF,+80-20%,10V,Y5V,TP	
....4 CC50	2203-005384	C-CERAMIC,CHIP;4700nF,+80-20%,10V,Y5V,TP	
....4 CD01	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
....4 CD02	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
....4 CF01	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
....4 CF02	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
....4 CL03	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
....4 CL05	3301-001324	CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM,	
....4 CL06	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 CL07	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 CQ01	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 CQ02	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 CQ03	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 CQ04	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 CQ05	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 CR01	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
....4 CR02	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
....4 CR03	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
....4 CR04	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
....4 CR05	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 CR06	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 CR07	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 CR08	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 CR09	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 CR10	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 CR12	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
....4 CR13	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
....4 CR14	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
....4 CR15	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
....4 CR16	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
....4 CR20	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 CR22	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 CR25	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
....4 CR27	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 CR28	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 CR29	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
....4 CR30	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
....4 CR31	2007-000643	R-CHIP;270ohm,5%,1/16W,DA,TP,1608	
....4 CR32	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
....4 CR33	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
....4 CR35	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 CR37	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 CR38	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 CR45	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 CR46	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 CR47	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
....4 CR48	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
....4 CR49	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
....4 CR50	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
....4 CR51	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
....4 CR52	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
....4 CR53	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
....4 CR54	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
....4 CR55	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
....4 CR56	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	

Loc. No.	Code No.	Description ; Specification	Remark
....4 DC16	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 DC17	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 DC18	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 DC19	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 DC20	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 DC21	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
....4 DC22	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
....4 DC23	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 DC24	2203-001656	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,1608	
....4 DC25	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 DC26	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 DC27	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
....4 DC28	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 DC29	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 DC30	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 DC31	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 DC32	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 DC33	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 DC34	2203-000998	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,160	
....4 DC35	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 DC36	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
....4 DC37	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 DC38	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
....4 DC39	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
....4 DD01	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
....4 DD02	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
....4 DD03	0403-000689	DIODE-ZENER;DTZ5.1A,5.1V,4.84-5.04V,200m	
....4 DD06	0403-000689	DIODE-ZENER;DTZ5.1A,5.1V,4.84-5.04V,200m	
....4 DD07	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
....4 DL05	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 DL06	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 DL07	2702-001092	INDUCTOR-RADIAL;2.2uH,10%,6x4mm	
....4 DQ01	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
....4 DR16	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 DR17	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 DR18	2007-000101	R-CHIP;82Kohm,5%,1/16W,DA,TP,1608	
....4 DR19	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
....4 DR20	2007-000081	R-CHIP;2.7Kohm,5%,1/16W,DA,TP,1608	
....4 DR22	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 DR23	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
....4 DR24	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
....4 DR25	2007-000129	R-CHIP;27Kohm,5%,1/16W,DA,TP,1608	
....4 DR26	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 DR27	2007-000127	R-CHIP;9.1Kohm,5%,1/16W,DA,TP,1608	
....4 DR29	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 DR30	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 DR31	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 DR32	2007-000118	R-CHIP;390ohm,5%,1/16W,DA,TP,1608	
....4 DR33	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 DR34	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 DR35	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 DR36	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
....4 DR37	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 DR38	2007-000079	R-CHIP;1.8Kohm,5%,1/16W,DA,TP,1608	
....4 DR40	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 DR41	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 DR44	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 DR46	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
....4 IC01	1204-001598	IC-VIDEO PROCESS;VPC3230D-B2,QFP,80P,-,P	
....4 IC02	1204-001623	IC-VERTICAL PROCESSO;SDA9400,QFP,64P,-,P	
....4 IC03	1002-001045	IC-D/A CONVERTER;9280,8BIT,PLCC,68P,-,-,	
....4 IC06	1204-001372	IC-HOR./VER.PROCESSO;SDA9361,QFP,44P,-,P	
....4 IC07	1204-001550	IC-VIDEO PROCESS;CXA2101AQ,QFP,80P,-,PLA	
....4 IC11	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
....4 IC12	1203-001140	IC-VOL. DETECTOR;7039,TO-92P,3P,-,PLASTI	
....4 IC13	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
....4 PC01	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
....4 PC02	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 PC03	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
....4 PC04	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC05	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
....4 PC06	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 PC07	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC08	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC09	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC10	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC11	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
....4 PC12	2203-001646	C-CERAMIC,CHIP;3pF,0.5pF,50V,NPO,TP,2012	
....4 PC13	2203-001646	C-CERAMIC,CHIP;3pF,0.5pF,50V,NPO,TP,2012	
....4 PC14	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
....4 PC15	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
....4 PC16	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 PC17	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
....4 PC18	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 PC19	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
....4 PC20	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 PC21	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 PC22	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 PC23	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 PC24	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
....4 PC25	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 PC26	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
....4 PC27	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
....4 PC28	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
....4 PC29	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC30	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC31	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC32	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC33	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC34	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC35	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC36	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC37	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC38	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC39	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC40	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC41	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 PC42	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC43	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 PC47	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
....4 PC48	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
....4 PC49	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
....4 PC52	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
....4 PC53	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC54	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
....4 PC55	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 PC56	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 PC57	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 PC58	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 PC78	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PCB	AA41-00418A	PCB-DW SRC;PCL545R,FR-4,4L,A,1.6T,245X24	
....4 PIC01	1204-001598	IC-VIDEO PROCESS;VPC3230D-B2,QFP,80P,-,P	
....4 PIC02	1109-001144	IC-FIFO;81V04160,2x256Kx8Bit,TQFP,100P	
....4 PIC04	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
....4 PL01	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 PL02	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 PR01	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
....4 PR02	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
....4 PR03	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 PR04	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 PR06	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
....4 PR07	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
....4 PR08	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
....4 PR11	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
....4 PR12	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
....4 PR19	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
....4 PR20	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
....4 SC01	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 SC02	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC03	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 SC04	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC05	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC06	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC07	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC08	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC09	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC11	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC12	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC13	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC14	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC21	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC22	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
....4 SC23	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC24	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
....4 SC25	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 SC26	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
....4 SC27	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC28	2203-000552	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,1608	
....4 SC29	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC30	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 SC31	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 SC32	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC33	2203-000552	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,1608	
....4 SC34	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC35	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC36	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 SC37	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC38	2203-000552	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,1608	
....4 SC51	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 SC52	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC53	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 SC54	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SF01	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
....4 SL01	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 SL02	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 SL03	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 SL04	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 SL05	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 SL06	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 SL08	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 SL09	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
....4 SR01	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 SR02	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 SR03	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 SR04	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
....4 SR05	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
....4 SR06	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
....4 SR07	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
....4 SR08	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 SR09	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 SR11	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 SR12	2007-001056	R-CHIP;6.2Kohm,5%,1/16W,DA,TP,1608	
....4 SR13	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
....4 SR14	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 SR15	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 SR16	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
....4 SR17	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 SR18	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 SR19	2007-000381	R-CHIP;13Kohm,5%,1/16W,DA,TP,1608	
....4 SR21	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
....4 SR22	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 SR23	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 SR24	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 SR25	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP,2012	
....4 YC01	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC02	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC03	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC04	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC05	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC06	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC07	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC08	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC09	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC10	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC11	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC12	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC13	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC14	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC15	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC16	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC17	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC18	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC19	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC20	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC21	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 YC22	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC23	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 YC24	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC25	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC26	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 YC27	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	

Loc. No.	Code No.	Description ; Specification	Remark
....4 YC28	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 YC29	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 YC30	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC31	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
....4 YC32	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 YC33	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 YC34	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 YC35	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 YC36	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 YC37	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 YC38	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
....4 YC39	2203-000998	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,160	
....4 YC40	2203-000998	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,160	
....4 YC45	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC46	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 YC47	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 YC48	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 YC49	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC50	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC51	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
....4 YC52	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
....4 YC53	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC54	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC55	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC56	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC57	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 YC58	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC59	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC60	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC62	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
....4 YC63	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
....4 YC66	2203-000815	C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP,160	
....4 YD01	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
....4 YD02	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
....4 YD03	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
....4 YD04	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
....4 YD05	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
....4 YF01	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
....4 YF02	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
....4 YF03	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
....4 YF04	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
....4 YF05	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
....4 YL01	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
....4 YL02	2702-000160	INDUCTOR-RADIAL;4.7uH,10%,6x6.4mm	
....4 YQ01	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
....4 YQ02	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
....4 YQ03	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
....4 YQ06	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 YQ08	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
....4 YQ11	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 YQ12	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 YR05	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR06	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR07	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR08	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR09	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR10	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR100	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR101	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR102	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR103	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR104	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR105	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR11	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR12	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR14	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
....4 YR15	2007-000939	R-CHIP;47Kohm,1%,1/16W,DA,TP,1608	
....4 YR18	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR23	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 YR24	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 YR25	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR26	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR27	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR28	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR29	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
....4 YR30	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR31	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
....4 YR32	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR33	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
....4 YR40	2007-000691	R-CHIP;3.3Mohm,5%,1/16W,DA,TP,1608	
....4 YR41	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR43	2007-000799	R-CHIP;360ohm,5%,1/16W,DA,TP,1608	
....4 YR44	2007-000799	R-CHIP;360ohm,5%,1/16W,DA,TP,1608	
....4 YR45	2007-000799	R-CHIP;360ohm,5%,1/16W,DA,TP,1608	
....4 YR46	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR47	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR48	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR50	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
....4 YR51	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR53	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR56	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR59	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 YR60	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR61	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
....4 YR62	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 YR63	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR64	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR65	2007-000583	R-CHIP;22Kohm,1%,1/16W,DA,TP,1608	
....4 YR77	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
....4 YR78	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
....4 YR79	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
....4 YR83	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR85	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR86	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR88	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 YR89	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 YR90	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR91	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR92	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR98	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 YR99	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
....3	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	
..2	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
..2	AA95-00707A	ASSY-PCB,CAPTION;,PCL545R,P54A	
....3 BK01	AA61-10068A	BRACKET-PCB;M2160,SPTE,T0.3,-,-,-,-	
....3 CNC01	3711-002709	CONNECTOR-HEADER;NOWALL,12P,1R,2.5MM,ANG	
....3 CNC02	3711-002708	CONNECTOR-HEADER;NOWALL,10P,1R,2.5mm,ANG	
....3 ICC01	1204-001718	IC-DECODER;Z86129,DIP,18P,300MIL,PLASTIC	
....3 ICC02	1001-001083	IC-VIDEO SWITCH;NJM2248D,-,DIP,8P,300MIL	
....3 ICC03	1001-001083	IC-VIDEO SWITCH;NJM2248D,-,DIP,8P,300MIL	
....3 PCB	AA41-00337A	PCB-CAPTION;PCL545R,FR-1,1L,A,1.6T,245X2	
....3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
....3	AA99-20080H	ASSY-PCB SUB,AUTO; AA95-00707A ,V	S.N.A
....4 CC01	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
....4 CC02	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 CC03	2201-000600	C-CERAMIC,DISC;0.56nF,10%,50V,Y5P,TP,5x3	
....4 CC04	2401-000223	C-AL;100nF,20%,50V,LL,TP,5x11mm,5mm	
....4 CC05	2301-000310	C-FILM,PEF;68nF,5%,50V,TP,8.0X8.5X4.0X5,	
....4 CC06	2301-000301	C-FILM,PEF;6.8nF,5%,50V,TP,6.5X5.5X3.0X5	
....4 CC07	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
....4 CC08	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 CC09	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 CC10	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 CC11	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
....4 CC12	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 CC13	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
....4 CC14	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 CC15	2201-000600	C-CERAMIC,DISC;0.56nF,10%,50V,Y5P,TP,5x3	
....4 CC16	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 CC19	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 DC01	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DC02	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DC03	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 LC01	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
....4 QC01	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 QC02	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 RC01	2004-000433	R-METAL;1Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
....4 RC02	2004-000433	R-METAL;1Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
....4 RC03	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RC04	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RC05	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RC06	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RC07	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RC08	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.	Code No.	Description ; Specification	Remark
....4 RC09	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RC10	2004-000433	R-METAL;1Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
....4 RC11	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RC12	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RC13	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RC14	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RC15	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RC16	2004-000218	R-METAL;10Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
....4 RC17	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RC18	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RC19	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RC20	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RC21	2001-000628	R-CARBON;300OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RC22	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RC23	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RC24	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RC25	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
....4 RC30	2001-000708	R-CARBON;39OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..2	AA95-00706C	ASSY-PCB,CONV MDL:,PCL545R,P54A	
...3 C163	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
...3 CN103	3711-001094	CONNECTOR-HEADER;BOX,7P,1R,2.5mm,ANGLE,-	
...3 CN201	3703-001124	CONNECTOR-DIN;32P,2R,MALE,ANGLE,AUF	
...3 IC113	1203-000641	IC-RESET;7442,TO-92,3P,-,PLASTIC,-0.3/7	
...3	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
...3	AA99-20087Z	ASSY-PCB SUB,AUTO; AA95-00706C ,V	S.N.A
....4 C101	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.	
....4 C102	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.	
....4 C103	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.	
....4 C104	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C105	2203-000851	C-CERAMIC,CHIP;0.039nF,5%,50V,NP0,TP,160	
....4 C106	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C107	2203-000715	C-CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,1608	
....4 C108	2402-000170	C-AL,SMD;1uF,20%,50V,GP,TP,4.3x4.3x5.4,	
....4 C109	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C110	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 C111	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C112	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
....4 C113	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
....4 C114	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C115	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C116	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C117	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C118	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C119	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C121	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C122	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C123	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C124	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C125	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C126	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C127	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C128	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C129	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C130	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C131	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C132	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C133	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
....4 C134	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C135	2203-000715	C-CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,1608	
....4 C136	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C137	2203-000715	C-CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,1608	
....4 C138	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C139	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C140	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
....4 C141	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C142	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
....4 C143	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C144	2203-000715	C-CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,1608	
....4 C145	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C146	2203-000715	C-CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,1608	
....4 C147	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C148	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
....4 C149	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C150	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C151	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C152	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
....4 C153	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C154	2203-000715	C-CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,1608	
....4 C155	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C156	2203-000715	C-CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,1608	
....4 C157	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C158	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
....4 C159	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C160	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C161	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.	
....4 C162	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.	
....4 C164	2402-000173	C-AL,SMD;4.7uF,20%,35V,GP,TP,4.3x4.3x5.	
....4 C165	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C166	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C167	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
....4 C168	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C169	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C170	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C172	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.	
....4 C173	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.	
....4 C174	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.	
....4 C201	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C202	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C203	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C204	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C205	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C206	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C301	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.	
....4 D101	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
....4 D102	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
....4 DZ101	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ102	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ105	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ106	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ107	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ108	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ109	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ110	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ111	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ112	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ113	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ114	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ115	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ116	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ201	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ202	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ203	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ204	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ205	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 EF101	2901-000229	FILTER-EMI SMD;50V,0.3A,-,22000pF,4.5x3.	
....4 EF102	2901-000229	FILTER-EMI SMD;50V,0.3A,-,22000pF,4.5x3.	
....4 EF105	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF106	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF107	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF108	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF109	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF110	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF111	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF112	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF113	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF114	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF115	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF116	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF201	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF202	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF203	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF204	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF205	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 IC101	AA13-00071A	IC-ASIC;-,SDC91,QFP,208P,CONV CONTROLL	
....4 IC102	0801-001043	IC-CMOS LOGIC;74HC4046,PHASE-LOCKED-LOOP	
....4 IC103	AA09-00032A	IC-MCU;TSC87251G2D-OTP,TSC87251G2D-OT	
....4 IC104	1103-001167	IC-EEPROM;28C64,8KX8BIT,TSOP,28P,-,120NS	
....4 IC105	1201-001520	IC-VIDEO AMP;2210,SOP,8P,150MIL,DUAL,7dB	
....4 IC106	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
....4 IC107	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
....4 IC108	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
....4 IC109	0801-001156	IC-CMOS LOGIC;74HC4066,BILATERAL SWITCH,	

Loc. No.	Code No.	Description ; Specification	Remark
....4 IC110	0801-001156	IC-CMOS LOGIC;74HC4066,BILATERAL SWITCH,	
....4 IC111	1001-000105	IC-ANALOG SWITCH;CD4066BM,BILATERAL CMOS	
....4 IC112	1001-000105	IC-ANALOG SWITCH;CD4066BM,BILATERAL CMOS	
....4 IC201	1203-001502	IC-POSI.FIXED REG.;431,SOT-23,3P,-,PLAST	
....4 PCB	AA41-00188F	PCB-CONVERGENCE MODULE;SVP-43J5M,FR-4,2L	
....4 Q101	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
....4 Q102	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
....4 Q103	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
....4 Q104	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
....4 Q107	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
....4 Q109	0505-000257	FET-SILICON;2SK217,N,-,20mA,-,150mW,SOT-	
....4 Q110	0505-000257	FET-SILICON;2SK217,N,-,20mA,-,150mW,SOT-	
....4 Q111	0505-000257	FET-SILICON;2SK217,N,-,20mA,-,150mW,SOT-	
....4 Q112	0505-000257	FET-SILICON;2SK217,N,-,20mA,-,150mW,SOT-	
....4 Q113	0505-000257	FET-SILICON;2SK217,N,-,20mA,-,150mW,SOT-	
....4 Q114	0505-000257	FET-SILICON;2SK217,N,-,20mA,-,150mW,SOT-	
....4 R101	2007-000882	R-CHIP;4.7ohm,5%,1/16W,DA,TP,1608	
....4 R102	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
....4 R103	2007-000882	R-CHIP;4.7ohm,5%,1/16W,DA,TP,1608	
....4 R104	2007-000882	R-CHIP;4.7ohm,5%,1/16W,DA,TP,1608	
....4 R105	2007-000416	R-CHIP;15ohm,5%,1/16W,DA,TP,1608	
....4 R106	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
....4 R107	2007-000102	R-CHIP;100Kohm,5%,1/16W,DA,TP,1608	
....4 R108	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R109	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
....4 R110	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
....4 R111	2007-000381	R-CHIP;13Kohm,5%,1/16W,DA,TP,1608	
....4 R112	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R113	2007-000099	R-CHIP;62Kohm,5%,1/16W,DA,TP,1608	
....4 R114	2007-000309	R-CHIP;10ohm,5%,1/16W,DA,TP,1608	
....4 R116	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R117	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R118	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R119	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R120	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R121	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
....4 R122	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R124	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R125	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
....4 R126	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
....4 R127	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
....4 R128	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R129	2007-000043	R-CHIP;1Kohm,1%,1/16W,DA,TP,1608	
....4 R130	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
....4 R131	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
....4 R132	2007-000043	R-CHIP;1Kohm,1%,1/16W,DA,TP,1608	
....4 R133	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
....4 R134	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
....4 R135	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R136	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R137	2007-000043	R-CHIP;1Kohm,1%,1/16W,DA,TP,1608	
....4 R138	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
....4 R139	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
....4 R140	2007-000043	R-CHIP;1Kohm,1%,1/16W,DA,TP,1608	
....4 R141	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
....4 R142	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
....4 R143	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R144	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R145	2007-000043	R-CHIP;1Kohm,1%,1/16W,DA,TP,1608	
....4 R146	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
....4 R147	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
....4 R148	2007-000043	R-CHIP;1Kohm,1%,1/16W,DA,TP,1608	
....4 R149	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
....4 R150	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
....4 R151	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R152	2007-000102	R-CHIP;100Kohm,5%,1/16W,DA,TP,1608	
....4 R153	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R154	2007-000134	R-CHIP;33Kohm,5%,1/16W,DA,TP,1608	
....4 R155	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 R156	2007-001056	R-CHIP;6.2Kohm,5%,1/16W,DA,TP,1608	
....4 R157	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
....4 R158	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R159	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R160	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R161	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R162	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R163	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R164	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R165	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R167	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R175	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 R176	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R178	2007-000729	R-CHIP;300ohm,5%,1/16W,DA,TP,1608	
....4 R179	2007-000729	R-CHIP;300ohm,5%,1/16W,DA,TP,1608	
....4 R180	2007-000729	R-CHIP;300ohm,5%,1/16W,DA,TP,1608	
....4 R181	2007-000729	R-CHIP;300ohm,5%,1/16W,DA,TP,1608	
....4 R182	2007-000729	R-CHIP;300ohm,5%,1/16W,DA,TP,1608	
....4 R183	2007-000729	R-CHIP;300ohm,5%,1/16W,DA,TP,1608	
....4 R192	2007-000309	R-CHIP;10ohm,5%,1/16W,DA,TP,1608	
....4 R193	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R194	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R201	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
....4 R203	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
....4 R204	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
....4 R205	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
....4 R206	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
....4 R207	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
....4 R208	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
....4 R301	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
....4 R302	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
....4 R303	2007-000093	R-CHIP;20Kohm,5%,1/16W,DA,TP,1608	
....4 R304	2007-000093	R-CHIP;20Kohm,5%,1/16W,DA,TP,1608	
....4 R305	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R306	2007-000704	R-CHIP;3.6Kohm,5%,1/16W,DA,TP,1608	
....4 R307	2007-000691	R-CHIP;3.3Mohm,5%,1/16W,DA,TP,1608	
....4 R308	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 X101	2801-003860	CRYSTAL-SMD;24MHz,30ppm,28-ABV,20pF,50oh	
..2	AA65-30105B	CLAMP-WIRE;NYLON 66,V2,NTR,25MM,ALL MODE	
..2	AA59-00171A	MODULE-FOCUS,PACK;SVP-5200,S300-P3,-,-,-	
..2	AA65-30018A	CLAMP-WIRE;NYLON-66,-,-,DATL-600,DONG-A,	
..2	AA65-30104B	CLAMP-WIRE;NYLON 66,V2,BLK,W2 Z5,ALL MOD	
..2	AA95-01103A	ASSY-PCB,SOUND;,PCL5415R,P54A	
...3 CN601	3703-001175	CONNECTOR-DIN;64P,2R,MALE,ANGLE,AU	
...3 XD601	2801-000186	CRYSTAL-UNIT;18.432MHz,25ppm,28-AAM,8pF,	
...3	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
...3	AA99-20091S	ASSY-PCB SUB,AUTO; AA95-01103A ,V	S.N.A
....4 CD601	2401-000444	C-AL;10uF,20%,25V,GP,TP,5x5mm,5mm	
....4 CD602	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CD603	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
....4 CD604	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
....4 CD605	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
....4 CD606	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CD607	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
....4 CD608	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
....4 CD609	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
....4 CD610	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
....4 CD611	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
....4 CD612	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
....4 CD613	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CD614	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
....4 CD616	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
....4 CD617	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
....4 CD618	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
....4 CD619	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
....4 CD620	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
....4 CD621	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
....4 CD622	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
....4 CD623	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
....4 CD624	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
....4 CD625	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
....4 CD626	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
....4 CD627	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
....4 CD628	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
....4 CD629	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 CD630	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
....4 CD631	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CD632	2401-000444	C-AL;10uF,20%,25V,GP,TP,5x5mm,5mm	
....4 CD633	2203-000332	C-CERAMIC,CHIP;0.012nF,5%,50V,NP0,TP,160	
....4 CD634	2203-000332	C-CERAMIC,CHIP;0.012nF,5%,50V,NP0,TP,160	
....4 CD635	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
....4 CD636	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
....4 CD637	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
....4 CD638	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
....4 CD639	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 CD640	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CD641	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 CD642	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 CD643	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 CD648	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 CD649	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 CD650	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
....4 CD652	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
....4 CD653	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
....4 CD654	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
....4 CD660	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
....4 CD662	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CD670	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
....4 ICD601	1204-001631	IC-SOUND PROCESSOR;MSP3450G,QFP,80P,-,PL	
....4 ICD602	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	
....4 LD601	2701-001032	INDUCTOR-AXIAL;100uH,10%,5x14mm	
....4 LD602	2701-001032	INDUCTOR-AXIAL;100uH,10%,5x14mm	
....4 LD603	2701-001032	INDUCTOR-AXIAL;100uH,10%,5x14mm	
....4 PCB	AA41-00335A	PCB-SOUND;PCL545R,FR-4,2L,A,1.6T,180X245	
....4 RD601	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD602	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD603	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD604	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD605	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD606	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD607	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD608	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD609	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD610	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 RD611	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 RD613	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 RD614	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 RD615	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 RD616	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD617	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD618	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 RD619	2007-001179	R-CHIP;8.2Kohm,5%,1/16W,DA,TP,1608	
....4 RD620	2007-000134	R-CHIP;33Kohm,5%,1/16W,DA,TP,1608	
....4 RD621	2007-001010	R-CHIP;51Kohm,5%,1/16W,DA,TP,1608	
....4 RD622	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
....4 RD623	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
....4 RD624	2007-001010	R-CHIP;51Kohm,5%,1/16W,DA,TP,1608	
....4 RD625	2007-001179	R-CHIP;8.2Kohm,5%,1/16W,DA,TP,1608	
....4 RD626	2007-000134	R-CHIP;33Kohm,5%,1/16W,DA,TP,1608	
....4 RD627	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 RD628	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD629	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD638	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
..2	AA95-00981B	ASSY-PCB 3D COMB;,WT-32Z5HD,K54A	
...3 CD10	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
...3 CD11	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD12	2401-002464	C-AL;47uF,20%,16V,BP,TP,8x11.5,5	
...3 CD18	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
...3 CD20	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD21	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD22	2203-001034	C-CERAMIC,CHIP;5.6nF,10%,50V,X7R,TP,1608	
...3 CD23	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
...3 CD24	2401-000455	C-AL;10uF,20%,35V,GP,TP,4x7mm,5mm	
...3 CD40	2301-000111	C-FILM,PEF;1.8nF,5%,50V,TP,6.5x3.0x5.5mm	
...3 CD41	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD42	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD43	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD44	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD45	2401-000455	C-AL;10uF,20%,35V,GP,TP,4x7mm,5mm	
...3 CD46	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD47	2401-000455	C-AL;10uF,20%,35V,GP,TP,4x7mm,5mm	
...3 CD50	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD51	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD52	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD53	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD54	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD55	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD56	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD57	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
...3 CD58	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD59	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	

Loc. No.	Code No.	Description ; Specification	Remark
...3 CD60	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
...3 CD62	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD63	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD64	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
...3 CD66	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
...3 CD67	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD68	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
...3 CD69	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD71	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
...3 CD72	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD74	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD75	2203-000626	C-CERAMIC,CHIP;0.022nF,5%,50V,NP0,TP,160	
...3 CD80	2203-000357	C-CERAMIC,CHIP;0.15nF,5%,50V,NP0,TP,1608	
...3 CD81	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD84	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD85	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
...3 CD86	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD87	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD88	2203-000626	C-CERAMIC,CHIP;0.022nF,5%,50V,NP0,TP,160	
...3 CD89	2203-000626	C-CERAMIC,CHIP;0.022nF,5%,50V,NP0,TP,160	
...3 CD90	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD91	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CON01	3711-002705	CONNECTOR-HEADER;NOWALL,7P,1R,2.5mm,ANGL	
...3 CON02	3711-002703	CONNECTOR-HEADER;NOWALL,5P,1R,2.5mm,ANGL	
...3 DD01	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
...3 DD02	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
...3 DD03	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
...3 FD00	2909-001051	FILTER-LC;6MHz,6MHz,0.8dB,TP,5dB/6MHz,30	
...3 FD01	2909-001051	FILTER-LC;6MHz,6MHz,0.8dB,TP,5dB/6MHz,30	
...3 FD02	2909-001052	FILTER-LC;3.58MHz,3MHz,1.5dB,TP,11dB/1.0	
...3 FD03	2909-001051	FILTER-LC;6MHz,6MHz,0.8dB,TP,5dB/6MHz,30	
...3 IC01	1204-001556	IC-SEPARATOR;UPD64082GF,QFP,100P,-,PLAST	
...3 IC02	1105-001334	IC-DRAM;4E151612,1Mx16Bit,TSOP,44P,400	
...3 IC04	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
...3 JD01	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 JD04	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 LD01	2702-001095	INDUCTOR-RADIAL;18uH,10%,6x4mm	
...3 LD03	2702-001095	INDUCTOR-RADIAL;18uH,10%,6x4mm	
...3 LD05	2702-001096	INDUCTOR-RADIAL;33uH,10%,6x4mm	
...3 LD06	2702-001095	INDUCTOR-RADIAL;18uH,10%,6x4mm	
...3 LD07	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 LD09	2703-000271	INDUCTOR-SMD;4.7uH,10%,2x1.25x1.25mm	
...3 LD10	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
...3 PCB	AA41-00128E	PCB-3D COMB FILTER;CT-29A7DR,FR-4,2L,E,1	
...3 QD10	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD11	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...3 QD12	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...3 QD13	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD14	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...3 QD15	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...3 QD16	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...3 QD17	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD18	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...3 QD19	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD20	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...3 QD21	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD22	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...3 QD23	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD24	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD25	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...3 QD26	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD27	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD28	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...3 QD40	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD41	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 RD00	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD01	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD02	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
...3 RD03	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD04	2007-000094	R-CHIP;22Kohm,5%,1/16W,DA,TP,1608	
...3 RD05	2007-000088	R-CHIP;7.5Kohm,5%,1/16W,DA,TP,1608	
...3 RD06	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RD07	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RD08	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
...3 RD09	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
...3 RD10	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD11	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
...3 RD12	2007-000094	R-CHIP;22Kohm,5%,1/16W,DA,TP,1608	
...3 RD13	2007-000088	R-CHIP;7.5Kohm,5%,1/16W,DA,TP,1608	
...3 RD14	2007-000309	R-CHIP;10ohm,5%,1/16W,DA,TP,1608	
...3 RD15	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RD16	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
...3 RD17	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
...3 RD18	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD19	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
...3 RD20	2007-001093	R-CHIP;620ohm,5%,1/16W,DA,TP,1608	
...3 RD21	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
...3 RD22	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RD23	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
...3 RD24	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
...3 RD25	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
...3 RD26	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
...3 RD27	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
...3 RD37	2007-001093	R-CHIP;620ohm,5%,1/16W,DA,TP,1608	
...3 RD38	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD39	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RD40	2007-000583	R-CHIP;22Kohm,1%,1/16W,DA,TP,1608	
...3 RD41	2007-000052	R-CHIP;10Kohm,1%,1/16W,DA,TP,1608	
...3 RD42	2007-000583	R-CHIP;22Kohm,1%,1/16W,DA,TP,1608	
...3 RD43	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
...3 RD50	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD51	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RD59	2007-000102	R-CHIP;100Kohm,5%,1/16W,DA,TP,1608	
...3 RD62	2007-000309	R-CHIP;10ohm,5%,1/16W,DA,TP,1608	
...3 RD63	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
...3 RD64	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RD65	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RD66	2007-000096	R-CHIP;30Kohm,5%,1/16W,DA,TP,1608	
...3 RD67	2007-000125	R-CHIP;3.9Kohm,5%,1/16W,DA,TP,1608	
...3 RD68	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
...3 RD69	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
...3 RD70	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
...3 RD71	2007-000234	R-CHIP;1.3Kohm,5%,1/16W,DA,TP,1608	
...3 RD72	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
...3 RD73	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD74	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
...3 RD75	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD76	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD77	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD78	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD79	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD82	2007-000309	R-CHIP;10ohm,5%,1/16W,DA,TP,1608	
...3 RD83	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
...3 RD84	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
...3 RD85	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
...3 RD86	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
...3 RD87	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
...3 RD88	2007-000211	R-CHIP;1.1Kohm,5%,1/16W,DA,TP,1608	
...3 RD89	2007-000113	R-CHIP;33ohm,5%,1/16W,DA,TP,1608	
...3 RD90	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD91	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
...3 RD92	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD93	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 RD94	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 RD95	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RD96	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
...3 RD97	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
...3 RD98	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 XTAL01	2801-000199	CRYSTAL-UNIT;20MHz,50ppm,28-AAA,16pF,50o	
...3	AA98-60005J	ASSY-SUB,PART;S51A,SOUND,NICAM,-	
....4	0202-001004	SOLDER-CREAM;SQ-2030M SZH-1,S63A,D0.04,6	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
...3	AA63-40014A	SHIELD-CASE,T;-,SPTE,T0.5,SCT51A,-	
..2	AA95-00709A	ASSY-PCB,MICOM;,PCL545R,P54A	
...3 CN901	3703-001175	CONNECTOR-DIN;64P,2R,MALE,ANGLE,AU	
...3 IC901	AA09-00101A	IC MICOM;Z90371116PSC-OTP,SVP43J5M,52P,5	
...3 IC902	1103-001213	IC-EEPROM;M24C16-WBN6,2048x8Bit,SDIP,8P,	
...3 L903	2701-001032	INDUCTOR-AXIAL;100uH,10%,5x14mm	
...3 X901	2801-003224	CRYSTAL-UNIT;32.768KHZ,20PPM,28-AAY,12.5	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
...3	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	
...3	AA99-20080P	ASSY-PCB SUB,AUTO; AA95-00709A ,V	S.N.A
....4 C901	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
....4 C902	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C903	2203-000595	C-CERAMIC,CHIP;0.22nF,5%,50V,NP0,TP,2012	
....4 C904	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C905	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 C906	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C907	2301-000111	C-FILM,PEF;1.8nF,5%,50V,TP,6.5x3.0x5.5mm	
....4 C908	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
....4 C909	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
....4 C910	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
....4 C911	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
....4 C912	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C913	2201-000193	C-CERAMIC,DISC;0.01nF,0.25pF,50V,NP0,TP,	
....4 C914	2201-000578	C-CERAMIC,DISC;0.047nF,5%,50V,UJ,TP,5x3.	
....4 C915	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C916	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
....4 C917	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 C918	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C919	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
....4 C920	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C921	2203-000595	C-CERAMIC,CHIP;0.22nF,5%,50V,NP0,TP,2012	
....4 C925	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C926	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
....4 C927	2201-000578	C-CERAMIC,DISC;0.047nF,5%,50V,UJ,TP,5x3.	
....4 C928	2201-000578	C-CERAMIC,DISC;0.047nF,5%,50V,UJ,TP,5x3.	
....4 D901	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
....4 D902	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
....4 D903	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
....4 D904	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
....4 D905	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
....4 DZ903	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ904	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ905	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ911	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
....4 DZ912	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
....4 DZ913	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
....4 DZ916	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ917	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ918	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 F901	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 IC903	1203-001274	IC-VOL. DETECTOR;7545,TO-92,3P,-,PLASTIC	
....4 IC904	1203-000515	IC-VOL. DETECTOR;7042,TO-92,3P,177MIL,PL	
....4 L902	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L910	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L911	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L912	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L913	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 PCB	AA41-00338A	PCB-MICOM;PCL545R,FR-4,2L,A,1.6T,180X245	
....4 Q901	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q902	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q903	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q909	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q910	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q911	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 R901	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R902	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
....4 R903	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R904	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 R905	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R907	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R908	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R911	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 R912	2007-000076	R-CHIP;330ohm,5%,1/16W,DA,TP,1608	
....4 R913	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
....4 R914	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R915	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R916	2007-000081	R-CHIP;2.7Kohm,5%,1/16W,DA,TP,1608	
....4 R917	2007-000081	R-CHIP;2.7Kohm,5%,1/16W,DA,TP,1608	
....4 R918	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
....4 R919	2007-000458	R-CHIP;18Kohm,5%,1/16W,DA,TP,1608	
....4 R920	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
....4 R921	2007-000087	R-CHIP;6.8Kohm,5%,1/16W,DA,TP,1608	
....4 R922	2007-000087	R-CHIP;6.8Kohm,5%,1/16W,DA,TP,1608	
....4 R923	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R924	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R925	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
....4 R926	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
....4 R927	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
....4 R928	2007-000081	R-CHIP;2.7Kohm,5%,1/16W,DA,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R929	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
....4 R930	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R931	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R932	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R934	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R935	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R936	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R937	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R945	2007-001093	R-CHIP;620ohm,5%,1/16W,DA,TP,1608	
....4 R946	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 R947	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 R948	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R949	2007-000082	R-CHIP;3.3Kohm,5%,1/16W,DA,TP,1608	
....4 R950	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R951	2007-000082	R-CHIP;3.3Kohm,5%,1/16W,DA,TP,1608	
....4 R958	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R959	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R960	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R961	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R962	2007-000098	R-CHIP;56Kohm,5%,1/16W,DA,TP,1608	
....4 R963	2007-000082	R-CHIP;3.3Kohm,5%,1/16W,DA,TP,1608	
....4 R964	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R965	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R967	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R968	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R969	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R971	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
....4 R972	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
....4 R973	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R974	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R976	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R977	2007-000305	R-CHIP;10Mohm,5%,1/16W,DA,TP,1608	
....4 R978	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 R981	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
....4 R982	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
....4 R983	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	

ASSY CRT-(B)

1		*AA94-03342A	ASSY CRT-(B);P16LSG03BMB,+380MG,7,-,PCL5	S.N.A
..2	BC+AL	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	
..2		AA65-30114A	CLAMP-LOCK;NYLON 66,V2,NTR,-,PROJECTION,	
..2		AA64-01316B	CASE-COUPLER,BLUE;53,T2.0,AL SHEET,-,-	
..2		AA61-00602B	BRACKET-LENS,RB;PROJECTION,SECC ,T1.6,-	
..2		AA61-00555B	HOLDER-LANS;53J8,PC ABS,BLK,-,-,GF20%	
..2		AA27-00151A	DEFLECTION YOKE;-,CDY-PT0702(X),PRT,P16L	
..2		AA91-00491A	ASSY-HOLDER,PACK;-,-,FILM PP RUBBER,54J8	
...3		AA60-00062B	SPACER-O,RING;53,SILICON,-,-,-,GRAY,-,-	
...3		AA61-00477B	HOLDER-PACK;43,53,61J8,PP,-,HB,-,-	
..2		AA91-00449A	ASSY-BRACKET,CRT;-,-,SECC T1.0,PJT	
...3		AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	
...3		AA61-00478A	SPRING-WIRE,CRT;PJT,STS,-,-,-,-,-,-,-,-	
...3		AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	
..2		AA67-10007A	LENS;-,DELTA,CLEAR,PJT,-,77,79,-	
..2		AA67-10005A	LENS-ASSY;-,DELTA,CLEAR,S4388,-,77,-	
..2		AA26-30006F	TRANS-FLYBACK;-,FWZ-50A001C,55,30KV	
..2		AA03-00202A	CRT MONO;P16LSG03BMB,-,7inch,-,-,-,FLAT	
..2		AA60-00074A	SPACER-DY;PJT,SILICON RUBBER,-,-,-,GRAY,	
..2		AA60-00063B	SPACER-CLENS;53,SILICON,-,-,-,GRAY,-,-,-	
..2		AA60-00061B	SPACER-CRT;53,SILICON,-,-,-,GRAY,-,-,-	
..2		AA39-00018A	LEAD CONNECTOR-ASSY;,1P,YFH800-01,YRH187	
..2		AA33-00008A	MAGNET CONVERGENCE;JH92LTU-36A,7inchPRT,	

ASSY CRT-(G)

0.1		*AA94-03341A	ASSY CRT-(G);P16LSG03HKA,+380MG,7,-,PCL5	S.N.A
..2	BC+AL	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	
..2		AA61-00476B	BRACKET-LENS;53,SECC,T1.6,-,-,-,-	
..2		AA61-00555B	HOLDER-LANS;53J8,PC ABS,BLK,-,-,GF20%	
..2		AA64-01315B	CASE-COUPLER,GREEN;43,53,61,T2.0,AL SHE	
..2		AA65-30114A	CLAMP-LOCK;NYLON 66,V2,NTR,-,PROJECTION,	
..2		AA67-10005A	LENS-ASSY;-,DELTA,CLEAR,S4388,-,77,-	
..2		AA67-10071A	LENS;DELTA 77 79,-,GREEN,C ELEMENT,	
..2		AA91-00449A	ASSY-BRACKET,CRT;-,-,SECC T1.0,PJT	
...3		AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	
...3		AA61-00478A	SPRING-WIRE,CRT;PJT,STS,-,-,-,-,-,-,-,-	
...3		AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	
..2		AA91-00491A	ASSY-HOLDER,PACK;-,-,FILM PP RUBBER,54J8	
...3		AA60-00062B	SPACER-O,RING;53,SILICON,-,-,-,GRAY,-,-	
...3		AA60-00062B	SPACER-O,RING;53,SILICON,-,-,-,GRAY,-,-	
...3		AA61-00477B	HOLDER-PACK;43,53,61J8,PP,-,HB,-,-	
..2		AA91-00449A	ASSY-BRACKET,CRT;-,-,SECC T1.0,PJT	
...3		AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	
...3		AA61-00478A	SPRING-WIRE,CRT;PJT,STS,-,-,-,-,-,-,-,-	
...3		AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	
..2		AA67-10008A	LENS;-,DELTA,RED,PJT,-,77,79,-	
..2		AA67-10005A	LENS-ASSY;-,DELTA,CLEAR,S4388,-,77,-	
..2		AA26-30006F	TRANS-FLYBACK;-,FWZ-50A001C,55,30KV	
..2		AA03-00200A	CRT MONO;P16LSG03RJA,-,7inch,-,-,-,FLAT	
..2		AA60-00074A	SPACER-DY;PJT,SILICON RUBBER,-,-,-,GRAY,	
..2		AA60-00063B	SPACER-CLENS;53,SILICON,-,-,-,GRAY,-,-,-	
..2		AA60-00061B	SPACER-CRT;53,SILICON,-,-,-,GRAY,-,-,-	
..2		AA39-00018A	LEAD CONNECTOR-ASSY;,1P,YFH800-01,YRH187	
..2		AA33-00008A	MAGNET CONVERGENCE;JH92LTU-36A,7inchPRT,	

ASSY CRT-(R)

1		*AA94-03340A	ASSY CRT-(R);P16LSG03RJA,+380MG,7,-,PCL5	S.N.A
..2	BC+AL	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	
..2		AA65-30114A	CLAMP-LOCK;NYLON 66,V2,NTR,-,PROJECTION,	
..2		AA64-01314B	CASE-COUPLER,RED;53,T2.0,AL SHEET,-,-	
..2		AA61-00602B	BRACKET-LENS,RB;PROJECTION,SECC ,T1.6,-	
..2		AA61-00555B	HOLDER-LANS;53J8,PC ABS,BLK,-,-,GF20%	
..2		AA27-00151A	DEFLECTION YOKE;-,CDY-PT0702(X),PRT,P16L	
..2		AA91-00491A	ASSY-HOLDER,PACK;-,-,FILM PP RUBBER,54J8	
...3		AA60-00062B	SPACER-O,RING;53,SILICON,-,-,-,GRAY,-,-	
...3		AA61-00477B	HOLDER-PACK;43,53,61J8,PP,-,HB,-,-	
..2		AA91-00449A	ASSY-BRACKET,CRT;-,-,SECC T1.0,PJT	
...3		AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	
...3		AA61-00478A	SPRING-WIRE,CRT;PJT,STS,-,-,-,-,-,-,-,-	
...3		AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	
..2		AA67-10008A	LENS;-,DELTA,RED,PJT,-,77,79,-	
..2		AA67-10005A	LENS-ASSY;-,DELTA,CLEAR,S4388,-,77,-	
..2		AA26-30006F	TRANS-FLYBACK;-,FWZ-50A001C,55,30KV	
..2		AA03-00200A	CRT MONO;P16LSG03RJA,-,7inch,-,-,-,FLAT	
..2		AA60-00074A	SPACER-DY;PJT,SILICON RUBBER,-,-,-,GRAY,	
..2		AA60-00063B	SPACER-CLENS;53,SILICON,-,-,-,GRAY,-,-,-	
..2		AA60-00061B	SPACER-CRT;53,SILICON,-,-,-,GRAY,-,-,-	
..2		AA39-00018A	LEAD CONNECTOR-ASSY;,1P,YFH800-01,YRH187	
..2		AA33-00008A	MAGNET CONVERGENCE;JH92LTU-36A,7inchPRT,	

ASSY CABINET MASK

1		*AA91-00654B	ASSY CABINET MASK;,HB,GRAY,GR801P+BL903P	
..2	C/FRON	AA63-00380A	COVER-CORNER;PJT,POLYESTER,-,-,CLR,#572	
..2		AA64-01495D	CABINET-MASK,SIDE;54J9(PCL5415R),GR801P+	
...3		AA64-01495A	CABINET-MASK,SIDE;54J8,L827.4 APCHUL,ABS	S.N.A
..2		AA64-01393N	CABINET-FRONT,MASK;54J9(PCL5415R),GR801P	
...3		AA64-01393A	CABINET-FRONT,MASK;54J8,L1099.4 APCHUL,A	S.N.A
..2		AA64-01393M	CABINET-FRONT,MASK;54J9(PCL5415R),GR801P	
...3		AA64-01393A	CABINET-FRONT,MASK;54J8,L1099.4 APCHUL,A	S.N.A
..2		AA61-00505B	HOLDER-CORNER;43,54,62J8,ABS,GRAY,HB	

ASSY-FRONT,BOT

1		*AA91-00653B	ASSY-FRONT,BOT;,VO G4309,HIPS,54J9(PCL54	
..2		AA64-70124C	BADGE-BRAND;AL,R2500,SILVER,L=70,SAMSUNG	
..2		AA64-01743B	CABINET-FRONT,BOT;54J9,HIPS,V0,G4309	S.N.A
..2		AA63-60131J	SPACER-FELT;54J9,62J9,FELT,-,-,-,-,T0.5,	S.N.A
..2		AA61-20129A	HOLDER-WIRE;-,-,NYLON-66,-,NTR,DAFC-2500	
..2		AA60-00077A	SPACER-DUAL,LOCK;54J8,#250,-,-,-,-,-,-,4	
..2		AA60-00071D	SPACER-JERSEY;54J9,JERSEY,-,-,-,GRAY,-,-	S.N.A

Loc. No.		Code No.	Description ; Specification	Remark
ASSY-WOOD				
1		*AA91-00620C	ASSY-WOOD;,WOOD,SDE8326R,54J9(PCL545R)	S.N.A
..2	AWTAWB	6006-001094	SCREW-ASS'Y WOOD;WW,HH,+,M7,L32,ZPC(YEL)	
..2		AA91-00474C	ASSY-WOOD,TOP;,WOOD SDE8326R,54J9(PCL545	S.N.A
...3	CW+CWT	AA60-10051B	SCREW-WOOD;-,SWRCH18A,M3.5,L11,RH,+,-,-	
...3	CWTHCW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	
...3		AA61-00674C	HOLDER-SCREEN;54 SIDE-L/R,ABS,BLK,HB,834	S.N.A
...3		AA64-01399B	CABINET-WOOD,TOP;54J9,SDE8326R,WOOD	S.N.A
...3		AA65-00014C	CLAMP-WIRE;54J9,SINGLE NYLON,BLK	
...3		AA61-00674B	HOLDER-SCREEN;54 TOP/BOTTOM,ABS,BLK,HB,1	S.N.A
...3		AA61-00644B	HOLDER-SENSOR;P54A(PRJT),PC,VIOLET	
...3		AA61-00507B	HOLDER-CABINET,WOOD;43,54,62J8,ABS,BLK,H	
...3		AA39-00220A	LEAD CONNECTOR ASSY;,12P,67096-012,67096	S.N.A
..2		AA91-00475C	ASSY-WOOD,BOT;,SDE8326R WOOD,54J9(PCL545	S.N.A
...3	CASCWB	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	
...3	HCMCWB	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	
...3	HW+CWB	AA60-10051B	SCREW-WOOD;-,SWRCH18A,M3.5,L11,RH,+,-,-	
...3	SPKCWB	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	
...3		AA61-00508C	HOLDER-JERSEY;54,62J9,ABS HB,BLK,HB,L40	S.N.A
...3		AA61-00508B	HOLDER-JERSEY;43,54,62J8,ABS,BLK,HB,-,-	
...3		AA61-00506B	HOLDER-CRT,MAIN;43,54,62J8,HIPS,BLK,HB,-	
...3		AA63-00348B	COVER-DUCT;54,62J8,HIPS,-,HB,BLK,-,-	
...3		AA61-70053A	RAIL-PCB;SVP-524JA,ABS,-,-,-,BLK,VO	
...3		AA61-00533B	BRACKET-GRILLE;43,54,62J8,SECC-1 ,T0.5,-	
...3		AA98-00049A	ASSY-LEAD,CON;-,LEAD-CON,CORE,AA39-20505	
....4		3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3		AA64-01402B	CABINET-WOOD,BOT;54J9,SDE8326R WOOD	S.N.A
...3		3001-001107	SPEAKER;20W,8ohm,95dB,1300Hz	
...3		3001-001134	SPEAKER;30W,8ohm,93dB,60Hz	
...3		AA39-00042A	LEAD CONNECTOR-ASSY;,2.2UF,REC,REC,200MM	
...3		AA60-00078A	SPACER-DUAL,LOCK;54J8,#250,-,-,-,-,-,-,4	
...3		AA61-00094C	HOLDER-RAIL;-,PCJ533R,ABS,HB,BLK,480	
...3		AA61-00097A	HOLDER-WIRE;-,-,NYLON 6/6,-,NTR,-	
...3		AA61-00458A	CASTER;-,-,TP4015-05 NYL,OH47,-,-,SR4	S.N.A
ASSY CHASSIS PART				
1		*AA90-00757A	ASSY CHASSIS PART;P54A SEA,54J9	S.N.A
..2	PM+HC	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
..2	PP+HC	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
..2	PS+HC	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
..2		AA61-00504B	HOLDER-CHASSIS;43,54,62J8,ABS,GRAY,VO,-,	
ASSY CABINET				
1		*AA90-00756B	ASSY CABINET;54J9,PCL5415RX/XAA	
..2	AC+BCM	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	
..2	APCAFB	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR	
..2	BM+CBT	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	
..2	CBB	AA64-01395L	INLAY-TERMINAL;J9,PS SHEET,T0.5,BLK,P54A	
..2	CBBAPT	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
..2	CBT	AA64-60449B	INLAY-COVER;SP-434JMF,PS,T0.5,149.3X69.5	
..2	CBT+CW	AA63-60002V	SPACER-FELT;-,FELT,-,-,-,BLK,T0.3,-,60X4	S.N.A
..2	CW+CBT	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
..2	CWBBCM	6006-001094	SCREW-ASS'Y WOOD;WW,HH,+,M7,L32,ZPC(YEL)	
..2	CWBCBB	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
..2	CWBCBS	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
..2	CWBCFB	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
..2	CWBHC	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
..2	FP+BCM	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	
..2	HV+BCM	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	
..2	WOODBO	AA63-60131A	SPACER-FELT;SVP403J,FELT,-,-,-,BLK,T0.5,	
..2		AA67-00080A	MIRROR-BACK;54J8,GLASS,940*686*673(132)*	
..2		AA67-00023A	SUN SCREEN,HC;-,53,H/C,A/S,PMMA,T=93%,T	
..2		AA65-30008A	CLAMP-CORD;PE,HB,BLK,-,-,-	
..2		AA64-60421C	INLAY-COVER;-,SEA,PS,T0.3,BLK,-,-	
..2		AA67-00116A	SCREEN-LENTI;53,-,T1,1123*852,-,-,TINT=1	
..2		AA91-00489B	ASSY-BRKT,MIRROR;-,-,SECC-1 T1.0,54J8	
...3		AA60-00073A	SPACER-FELT;54J8,FELT,-,-,-,-,T1.0,-,210	S.N.A
...3		AA61-00512B	BRACKET-MIRROR;43,53,61J8,SECC-1,T1.0,-,	S.N.A
..2		AA67-00116B	SCREEN-FRESNEL;53,-,T2,1125*854,-,-,-	
..2		AA64-01385C	CABINET-BACK,SIDE;545R,625R(SEA),HIPS,V0	S.N.A
..2		AA61-00600A	SPRING-EARTH;43J8,STS,.,-,-,-,-,-,-,0.	
..2		AA61-00475B	BRACKET-CRT,MAIN;54,SECC,T1.6,-,-,-,-	
..2		AA60-00091N	SPACER-FELT;-,FELT,70X10,-,-,BLK,T1.0,-	S.N.A
..2		AA60-00072B	SPACER-COVER,DUST;43,54,62J9,SPONGE 94HF	
..2		AA60-00069C	SPACER-SCREEN;43,54.62J8,ABS,-,-,-,BLK,-	S.N.A
..2		AA60-00069B	SPACER-SCREEN;43,54,62J8,ABS,-,-,-,BLK,-	S.N.A
..2		AA26-00101A	TRANS FBT;FWZ50A001E,-,-,-,-,-,-,-,-,-,-	
..2		AA64-01384B	CABINET-BACK,BOT;43,54,62J8,-,HIPS,VO,BL	
..2		AA64-01379B	CABINET-BACK,TOP;54J8,-,HIPS,HB,BLK	
..2		AA63-60131F	SPACER-FELT;PCJ612R,FELT,-,-,-,BLK,T0.5,	S.N.A
..2		AA61-20285A	HOLDER-BOX;-,3456,PP,VO,WHT,-	
..2		AA61-00642A	SPRING-EARTH,MAIN;PROJ(J7,J8,J9),STS,67,	
..2		AA61-00618B	GUIDE-FLOW;54J8,J7,ABS,-,-,-,BLK,HB	
REMOCON				
1		*AA59-00176A	REMOCON;-,TM63,SHARK,51,L/GRAY,DO,-,-,	
..2		2802-000194	RESONATOR-CERAMIC;8MHz,1.0%,TP,8.5x4.5x5	
..2		AA09-00051A	IC-MCU;Z86L8808SSC-R501M,SZTM-822,ST,	
ASSY POWER CORD				
1		*AA96-00156D	ASSY POWER CORD;-,EP2/YES(US),H/C 200MM,	
..2		AA61-20284A	HOLDER;-,P-CORD,PP,VO,BLK,KE-002	
..2		AA39-10007Y	POWER-CORD;-,EP2/YES,SPT-2 18AWGx2C,2.4m	
..2		3811-000401	WIRE-PVC CU;BCWA,300V,ROLL,17/0.16mm,#22	
..2		3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
ASSY ACCESSORY				
1		*AA94-03463A	ASSY ACCESSORY;PCL545RX/XAA,P54A,U.S.A,S	S.N.A
..2		AA69-30009C	BAG-SHEET;LDPE,T0.08,W150,L120,-,-,-	
..2		AA68-01413A	MANUAL USERS;PCL545R,ENG,W/P100(G),2(1),	
..2		AA68-01399A	MANUAL-GUIDE;,SEA,ENG,W/P 200(G),1,216X1	
..2		AA61-20126A	HOLDER-LEG;-,-,ABS,HB,BLK,-	
..2		AA39-00006A	CABLE-RCA;,3000MM	

7-3 PCL6215R3C/XAA

Loc. No.		Code No.	Description ; Specification	Remark
ASSY-PCB,SENSOR				
1		*AA95-01031B	ASSY-PCB,SENSOR;DP,PCL545R,P54A	
..2	CN01	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,STRAIGH	
..2	D01	0603-001067	PHOTO DIODE;-,10V,560nm,BK	
..2	PCB	AA41-00433A	PCB-SENSOR;PCL545R,CEM-1,1L,A,1.6T,245X2	
..2	Q01	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
..2		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
..2		AA99-20091W	ASSY-PCB SUB,AUTO; AA95-01031B ,V	S.N.A
...3	R01	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	R02	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	R03	2001-000454	R-CARBON;2.2MOHM,5%,1/8W,AA,TP,1.8X3.2M	
ASSY-CONTROL				
1		*AA95-01068B	ASSY-CONTROL;DP,PCL545R,P54A,16.2KG	
..2	PCB+A/	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
..2		AA95-00998A	ASSY-PCB,A/V FRONT;,PCL545R,P54A	S.N.A
...3	CNY01A	3711-003974	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
...3	CNY702	3711-000447	CONNECTOR-HEADER;3WALL,3P,1R,2.5mm,ANGLE	
...3	CNYW01	AA39-00231A	LEAD CONNECTOR ASSY;,12P,35155-1200,6709	
...3	JK101	3722-000544	JACK-VHS;4P,11.5mm,AG,BLK,N	
...3	JK102	3722-001164	JACK-RCA;3P,3.4mm,SN,WH:YE:RE,#16-22	
...3	PCB	AA41-00453A	PCB-AV FRONT;PCL545R,FR-1,1L,A,1.6T,330X	S.N.A
...3	RK101	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	SW101	3404-000208	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
...3		3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
..2		AA95-00961A	ASSY-PCB,CONTROL;-,PCL534R,P54A,-,-,-	S.N.A
...3	CNW01	AA39-00223A	LEAD CONNECTOR ASSY;,11P,67096-011,35155	
...3	CNY01	3711-003353	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,ANGLE,	
...3	CNY02	3711-000447	CONNECTOR-HEADER;3WALL,3P,1R,2.5mm,ANGLE	
...3	CNYW02	AA39-20016A	LEAD CONNECTOR-ASSY;,3P,67096-003,S,200,	
...3	CY01	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
...3	DZY02	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3	DZY03	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3	LEDY01	0601-001381	LED;ROUND,RED/GRN,5.0MM,650/563NM	
...3	PCB	AA41-00425A	PCB-CONTROL;SVP54J8SR,FR-1,1L,A,1.6T,245	S.N.A
...3	QY01	0504-000123	TR-DIGITAL;KSR1010,NPN,300mW,10K,TO-92,T	
...3	RMY01	AA59-60002B	MODULE-REMOCON;-,ORC-50HF,38KHZ,940MM,ME	
...3	RY02	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	RY03	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	RY04	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	RY05	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	RY06	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	RY07	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4M	
...3	RY08	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
...3	RY09	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
...3	SWY01	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY02	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY03	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY04	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY05	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY06	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY07	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY08	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3		3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
..2		AA91-00652A	ASSY-CONTROL;,HIPS HB BLK,SEA,PCL545R(54	S.N.A
...3	KC+PC	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR	
...3	KNOPOW	AA61-60003J	SPRING-CS;-,SUS304,0.5,OD6,H12,N7,-,-,-	
...3		AA64-01750B	KNOB POWER;54J9,62J9,ABS HB,GRAY,SV-012P	S.N.A
...3		AA64-01752B	INDICATOR LED;54J9,62J9,ACRYL,CLR	S.N.A
...3		AA64-01755B	WINDOW REMOCON;54J9,62J9,PC,SEMI VIOLET	S.N.A
...3		AA64-01749B	KNOB-CONTROL,HOLDER;54J9,62J9,ABS HB,BLK	S.N.A
...3		AA64-01747B	DOOR-AV;54J9,62J9,HIPS HB,BLK,BL903P	S.N.A
...3		AA64-01746B	PANEL-CONTROL;54J9,62J9,HIPS HB,BLK,LG80	S.N.A
...3		AA64-01396E	INLAY-AV;43,54,62J8,PS SHEET,T0.5,-,BLK	
ASSY CRT-(R)				
1		*AA97-01222A	ASSY CRT-(R);,+380MG,P16LSG03RJA,BARE,PC	S.N.A
..2	BC+AL	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	
..2		AA65-30114A	CLAMP-LOCK;NYLON 66,V2,NTR,-,PROJECTION,	
..2		AA64-01916A	CASE-COUPLER,RED;DP,54J9(R),64-01314B 10	S.N.A
...3		AA64-01314B	CASE-COUPLER,RED;53,T2.0,AL SHEET,-,-	
..2		AA61-00704A	BRACKET-LENS,RB;DP,54J9(R,B),-,-,-,-,-,6	S.N.A
...3		AA61-00602B	BRACKET-LENS,RB;PROJECTION,SECC ,T1.6,-,	
..2		AA61-00555B	HOLDER-LANS;53J8,PC ABS,BLK,-,-,GF20%	
..2		AA27-00145A	DEFLECTION YOKE;-,DPD-4392DL(S),ST-3,P16	
..2		AA91-00662A	ASSY-BRACKET,CRT;DP,91-00449A,54J9	S.N.A
...3		AA91-00449A	ASSY-BRACKET,CRT;-,-,SECC T1.0,PJT	
....4		AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	
....4		AA61-00478A	SPRING-WIRE,CRT;PJT,STS,-,-,-,-,-,-,-,-	
....4		AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	
..2		AA91-00491A	ASSY-HOLDER,PACK;-,-,FILM PP RUBBER,54J8	
...3		AA60-00062B	SPACER-O,RING;53,SILICON,-,-,-,GRAY,-,-,	
...3		AA61-00477B	HOLDER-PACK;43,53,61J8,PP,-,HB,-,-	
..2		AA67-10066A	LENS-ASSY;DELTA 37,-,-,CLEAR A/B,-,-,-	
..2		AA67-10008A	LENS;-,DELTA,RED,PJT,-,77,79,-	
..2		AA03-00200A	CRT MONO;P16LSG03RJA,-,7inch,-,-,-,FLAT	
..2		AA60-00074A	SPACER-DY;PJT,SILICON RUBBER,-,-,-,GRAY,	
..2		AA60-00063B	SPACER-CLENS;53,SILICON,-,-,-,GRAY,-,-,-	
..2		AA60-00061B	SPACER-CRT;53,SILICON,-,-,-,GRAY,-,-,-	
..2		AA39-00018A	LEAD CONNECTOR-ASSY;,1P,YFH800-01,YRH187	
..2		AA33-00008A	MAGNET CONVERGENCE;JH92LTU-36A,7inchPRT,	
ASSY CRT-(G)				
1		*AA97-01223A	ASSY CRT-(G);,+380MG,P16LSG03HKA,BARE,PC	
..2	BC+AL	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	
..2		AA61-00555B	HOLDER-LANS;53J8,PC ABS,BLK,-,-,GF20%	
..2		AA61-00705A	BRACKET-LENS,RB;DP,54J9(G),-,-,-,-,-,61-	S.N.A
...3		AA61-00476B	BRACKET-LENS;53,SECC,T1.6,-,-,-,-	
..2		AA64-01918A	CASE-COUPLER,GREEN;DP,54J9(G),64-01315B	S.N.A
...3		AA64-01315B	CASE-COUPLER,GREEN;43,53,61,T2.0,AL SHE	
..2		AA65-30114A	CLAMP-LOCK;NYLON 66,V2,NTR,-,PROJECTION,	
..2		AA67-10066A	LENS-ASSY;DELTA 37,-,-,CLEAR A/B,-,-,-	
..2		AA67-10071A	LENS;DELTA 77 79,-,GREEN,C ELEMENT,	
..2		AA91-00491A	ASSY-HOLDER,PACK;-,-,FILM PP RUBBER,54J8	
...3		AA60-00062B	SPACER-O,RING;53,SILICON,-,-,-,GRAY,-,-,	
...3		AA61-00477B	HOLDER-PACK;43,53,61J8,PP,-,HB,-,-	
..2		AA91-00662A	ASSY-BRACKET,CRT;DP,91-00449A,54J9	S.N.A
...3		AA91-00449A	ASSY-BRACKET,CRT;-,-,SECC T1.0,PJT	
....4		AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	
....4		AA61-00478A	SPRING-WIRE,CRT;PJT,STS,-,-,-,-,-,-,-,-	
....4		AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	
..2		AA27-00145A	DEFLECTION YOKE;-,DPD-4392DL(S),ST-3,P16	
..2		AA03-00201A	CRT MONO;P16LSG03HKA,-,7inch,-,-,-,FLAT	
..2		AA39-00018A	LEAD CONNECTOR-ASSY;,1P,YFH800-01,YRH187	
..2		AA60-00061B	SPACER-CRT;53,SILICON,-,-,-,GRAY,-,-,-	
..2		AA60-00063B	SPACER-CLENS;53,SILICON,-,-,-,GRAY,-,-,-	
..2		AA60-00074A	SPACER-DY;PJT,SILICON RUBBER,-,-,-,GRAY,	
ASSY CRT-(B)				
1		*AA97-01224A	ASSY CRT-(B);,+380MG,P16LSG03BMB,BARE,PC	S.N.A
..2	BC+AL	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	
..2		AA65-30114A	CLAMP-LOCK;NYLON 66,V2,NTR,-,PROJECTION,	
..2		AA64-01917A	CASE-COUPLER,BLUE;DP,54J9(B),64-01316B 1	S.N.A
...3		AA64-01316B	CASE-COUPLER,BLUE;53,T2.0,AL SHEET,-,-	

Loc. No.	Code No.	Description ; Specification	Remark
..2	AA61-00704A	BRACKET-LENS,RB;DP,54J9(R,B),-,-,-,-,-,6	S.N.A
...3	AA61-00602B	BRACKET-LENS,RB;PROJECTION,SECC ,T1.6,-,	
..2	AA61-00555B	HOLDER-LANS;53J8,PC ABS,BLK,-,-,GF20%	
..2	AA27-00145A	DEFLECTION YOKE;-,DPD-4392DL(S),ST-3,P16	
..2	AA91-00662A	ASSY-BRACKET,CRT;DP,91-00449A,54J9	S.N.A
...3	AA91-00449A	ASSY-BRACKET,CRT;-,-,SECC T1.0,PJT	
....4	AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	
....4	AA61-00478A	SPRING-WIRE,CRT;PJT,STS,-,-,-,-,-,-,-,	
....4	AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	
..2	AA91-00491A	ASSY-HOLDER,PACK;-,-,FILM PP RUBBER,54J8	
...3	AA60-00062B	SPACER-O,RING;53,SILICON,-,-,-,GRAY,-,-,	
...3	AA61-00477B	HOLDER-PACK;43,53,61J8,PP,-,HB,-,-	
..2	AA67-10066A	LENS-ASSY;DELTA 37,-,-,CLEAR A/B,-,-,-	
..2	AA67-10007A	LENS;-,DELTA,CLEAR,PJT,-,77,79,-	
..2	AA03-00202A	CRT MONO;P16LSG03BMB,-,7inch,-,-,-,FLAT	
..2	AA60-00074A	SPACER-DY;PJT,SILICON RUBBER,-,-,-,GRAY,	
..2	AA60-00063B	SPACER-CLENS;53,SILICON,-,-,-,GRAY,-,-,-	
..2	AA60-00061B	SPACER-CRT;53,SILICON,-,-,-,GRAY,-,-,-	
..2	AA39-00018A	LEAD CONNECTOR-ASSY;,1P,YFH800-01,YRH187	
..2	AA33-00008A	MAGNET CONVERGENCE;JH92LTU-36A,7inchPRT,	

ASSY PCB CRT

1		*AA95-00970B	ASSY PCB CRT;DP,P54A,54,U.S.A,PCL545R	
..2	C511	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
..2	C541	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
..2	C571	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
..2	CN501	3711-003051	CONNECTOR-HEADER;BOX,8P,1R,2.5mm,STRAGHT	
..2	CN502	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5mm,STRAGH	
..2	CN502B	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5mm,STRAGH	
..2	CN503	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5mm,STRAGH	
..2	CN503B	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5mm,STRAGH	
..2	CNW401	AA39-20027C	LEAD CONNECTOR-ASSY;,6P,67096-006,S,500,	
..2	CNW501	AA39-00127B	LEAD CONNECTOR-ASSY;,8P,35155-0800,S,600	
..2	CNW502	AA39-00112A	LEAD CONNECTOR-ASSY;,10P,35155-1000,S,30	
..2	CNW503	AA39-00112A	LEAD CONNECTOR-ASSY;,10P,35155-1000,S,30	
..2	FOCUS-	AA39-20115A	LEAD CONNECTOR-ASSY;,1P,BUSHING,500,3239	
..2	FOCUS-	AA39-20115A	LEAD CONNECTOR-ASSY;,1P,BUSHING,500,3239	
..2	FOCUS-	AA39-20115B	LEAD CONNECTOR-ASSY;,1P,BUSHING,-,700MM,	
..2	GBW-GN	3811-000446	WIRE-PVC CU;TCWA,600V,ROLL,17/0.16mm,#22	
..2	GBW-SC	3811-000480	WIRE-PVC CU;BCWA,1KV,ROLL,17/0.16mm,#22,	
..2	GNDWIR	AA39-00198A	LEAD CONNECTOR ASSY;,3P,YFH800-03,YFH800	
..2	GRW-GN	3811-000446	WIRE-PVC CU;TCWA,600V,ROLL,17/0.16mm,#22	
..2	GRW-SC	3811-000480	WIRE-PVC CU;BCWA,1KV,ROLL,17/0.16mm,#22,	
..2	IC501	AA96-50151B	ASSY-H/S;-,AMP,AA61-10060A,TDA6111Q,-	
...3		1201-001131	IC-VIDEO AMP;6111,SIP,9P,-,SINGLE,-,PLAS	
...3		6001-000057	SCREW-MACHINE;RH,+,M3,L6,ZPC(BLK),SWRCH1	
...3		6021-000222	NUT-HEXAGON;2C,M3,ZPC(YEL),SM20C 1	
...3		AA61-10060A	BRACKET-TR;W3220,CUS-1 1/2H,T0.5,-,-,-,-	
..2	IC531	AA96-50151B	ASSY-H/S;-,AMP,AA61-10060A,TDA6111Q,-	
..2	IC561	AA96-50151B	ASSY-H/S;-,AMP,AA61-10060A,TDA6111Q,-	
..2	PCB	AA41-00406A	PCB-CRT;PCL545R,FR-1,1L,A,1.6T,245X245	
..2	SG502	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
..2	SG532	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
..2	SG562	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
..2	V501	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U	
..2	V531	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U	
..2	V561	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U	
..2	VR501	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
..2	VR531	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
..2	VR561	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
..2		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
..2		3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
..2		AA99-20091V	ASSY-PCB SUB,AUTO; AA95-00970B ,V	S.N.A
...3	C502	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
...3	C503	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
...3	C504	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
...3	C505	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
...3	C506	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
...3	C507	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
...3	C510	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
...3	C512	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
...3	C513	2201-000983	C-CERAMIC,DISC;1nF,10%,2kV,Y5P,TP,9x5,7.	
...3	C514	2201-000599	C-CERAMIC,DISC;0.56nF,10%,500V,Y5P,TP,5.	
...3	C532	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
...3	C533	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
...3	C534	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
...3	C535	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
...3	C536	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
...3	C537	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
...3	C540	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
...3	C542	2201-000983	C-CERAMIC,DISC;1nF,10%,2kV,Y5P,TP,9x5,7.	
...3	C543	2201-000599	C-CERAMIC,DISC;0.56nF,10%,500V,Y5P,TP,5.	
...3	C562	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
...3	C563	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
...3	C564	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
...3	C565	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
...3	C566	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
...3	C567	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
...3	C570	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
...3	C572	2201-000983	C-CERAMIC,DISC;1nF,10%,2kV,Y5P,TP,9x5,7.	
...3	C573	2201-000599	C-CERAMIC,DISC;0.56nF,10%,500V,Y5P,TP,5.	
...3	CN401	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5MM,STRAIGH	
...3	D501	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3	D502	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3	D503	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
...3	D504	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3	D509	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3	D510	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3	D531	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3	D532	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3	D533	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
...3	D561	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3	D562	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3	D563	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
...3	DZ501	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
...3	DZ502	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
...3	DZ503	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
...3	DZ531	0403-001317	DIODE-ZENER;MTZJ3.0B,3.01-3.22V,500mW,DO	
...3	DZ532	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
...3	DZ533	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
...3	DZ561	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
...3	DZ562	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
...3	DZ563	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
...3	L501	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
...3	L531	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
...3	L561	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
...3	Q501	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
...3	Q502	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3	Q504	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
...3	Q531	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
...3	Q533	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
...3	Q561	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
...3	Q563	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
...3	R500	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	R502	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R503	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R504	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	R505	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R506	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
...3	R507	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R508	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
...3	R509	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	R510	2001-001000	R-CARBON;82KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R511	2001-000313	R-CARBON;11KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R513	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
...3	R514	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
...3	R515	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
...3	R516	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R517	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
...3	R518	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
...3	R519	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
...3	R520	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
...3	R521	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
...3	R522	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W,AA,TP,3.7x	
...3	R523	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W,AA,TP,3.7x	
...3	R524	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
...3	R526	2001-000539	R-CARBON;24KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R527	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R528	2001-001015	R-CARBON;9.1KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	R529	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	

Loc. No.		Code No.	Description ; Specification	Remark
...3	R532	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R533	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R536	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
...3	R537	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R538	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
...3	R540	2001-000837	R-CARBON;51KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R541	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R543	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
...3	R544	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
...3	R545	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
...3	R546	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R547	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
...3	R548	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
...3	R549	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
...3	R550	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
...3	R551	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
...3	R552	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W,AA,TP,3.7x	
...3	R553	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W,AA,TP,3.7x	
...3	R554	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
...3	R555	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	R556	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R557	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R559	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
...3	R562	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	R563	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R564	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R566	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
...3	R567	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R568	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	R569	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3	R570	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R571	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R572	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
...3	R573	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
...3	R574	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
...3	R575	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
...3	R576	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	R577	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
...3	R578	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
...3	R579	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
...3	R580	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
...3	R581	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
...3	R582	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W,AA,TP,3.7x	
...3	R583	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W,AA,TP,3.7x	
...3	R584	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
...3	R589	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
...3	SG351	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
...3	SG501	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
...3	SG503	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
...3	SG533	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
...3	SG561	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
...3	SG563	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	

ASSY CABINET

1		*AA90-00769B	ASSY CABINET;62J9,PCL6215R3C/XAA	S.N.A
..2	AC+BCM	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	
..2	APCAFB	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR	
..2	CBBAPT	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
..2	CMWCWT	6005-001004	SCREW-WOOD;HH,+,M4,L27,BLK,SWRCH18	
..2	CW+CBT	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
..2	CWB+HC	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
..2	CWBBCM	6006-001094	SCREW-ASS'Y WOOD;WW,HH,+,M7,L32,ZPC(YEL)	
..2	CWBCBB	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
..2	CWBCBS	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
..2	CWBCFB	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
..2	FP+BCM	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	
..2	HM+CMW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
..2	HV+BCM	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	
..2		AA67-70056A	SCREEN-TINT;0.515,61',DNP,896-985,TINT10	
..2		AA67-00081A	MIRROR-BACK;62J8,GLASS,1187*725*830,-,-,	
..2		AA67-00022A	SUN SCREEN,HC;-,61,H/C,A/S,PMMA,T=82%,T	
..2		AA65-30008A	CLAMP-CORD;PE,HB,BLK,-,-,-	
..2		AA64-01924A	CABINET-MASK,ETC;DP,62J9,64-01650E,F,ABS	S.N.A
...3		AA64-01652C	CABINET-MASK,SIDE;62J9,GR801P+BL903P SEA	
....4		AA64-01652A	CABINET-MASK,SIDE;62J8,L946 APCHUL,ABS,H	
...3		AA64-01650F	CABINET-FRONT,MASK;62J9(PCL6215R),GR801P	
....4		AA64-01650A	CABINET-FRONT,MASK;62J8,L1257.4 APCHUL,A	
...3		AA64-01650E	CABINET-FRONT,MASK;62J9(PCL6215R),GR801P	
....4		AA64-01650A	CABINET-FRONT,MASK;62J8,L1257.4 APCHUL,A	
...3		AA63-00380A	COVER-CORNER;PJT,POLYESTER,-,-,CLR,#572	
...3		AA61-00505B	HOLDER-CORNER;43,54,62J8,ABS,GRAY,HB	
..2		AA64-60421C	INLAY-COVER;-,SEA,PS,T0.3,BLK,-,-	
..2		AA64-60449C	INLAY-COVER;SP-438JMF,PS,T0.5,149.3X69.5	
..2		AA63-60131A	SPACER-FELT;SVP403J,FELT,-,-,-,BLK,T0.5,	
..2		AA63-00386A	COVER-MIRROR,WOOD;62J8,WOOD,-,-,-,ASSY,-	
...3		AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	
...3		AA61-00357C	HOLDER-MIRROR;-,PCJ612R,ABS,HB,BLK,L730	
...3		AA63-00387A	COVER-MIRROR,WOOD;62J8,WOOD,-,-,-,MDF R1	
..2		AA69-30036A	BAG-PE;HDPE,T0.02,2000,1800,-,-,555J,	
..2		AA61-00600A	SPRING-EARTH;43J8,STS,,-,-,-,-,-,-,0.	
..2		AA61-00370D	HOLDER-MIRROR;DP,PCJ612R,-,-,-,AA61-0035	
...3		AA61-00357C	HOLDER-MIRROR;-,PCJ612R,ABS,HB,BLK,L730	
..2		AA61-00370C	HOLDER-MIRROR;DP,PCJ612R,-,-,-,AA61-0035	
...3		AA61-00357B	HOLDER-MIRROR;-,PCJ612R,ABS,HB,BLK,L1170	
..2		AA61-00049B	HOLDER-BOX;DP,-,PP,V0,NTR,AA61-20285A	
...3		AA61-20285A	HOLDER-BOX;-,3456,PP,VO,WHT,-	
..2		AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	
..2		AA60-00072B	SPACER-COVER,DUST;43,54,62J9,SPONGE 94HF	
..2		AA60-00069G	SPACER-SCREEN;43,53,61J8,ABS,-,-,-,BLK,-	
..2		AA60-00069F	SPACER-SCREEN;43,53,61J8,ABS,-,-,-,BLK,-	
..2		AA61-00617A	BRACKET-CRT,MAIN;54J7,DP,-,-,-,-,AA61-00	
...3		AA61-00475B	BRACKET-CRT,MAIN;54,SECC,T1.6,-,-,-,-	
..2		AA64-01922A	CABINET-BACK,TOP;DP,62J9,AA64-01870B 75.	
...3		AA61-30009A	LOCKER-BAND,CLIP;-,SPC-1,-,-,18MM T0.5,-	S.N.A
...3		AA64-01870B	CABINET-BACK,TOP;62J9,SHEET,HIPS HB,BLK	
..2		AA64-01850B	CABINET-BACK,SIDE;DP,54J9,AA64-01385C,V0	
...3		AA64-01385C	CABINET-BACK,SIDE;545R,625R(SEA),HIPS,V0	S.N.A
..2		AA64-01849A	CABINET-BACK,BOT;DP,62J8,AA64-01384B,VO	
...3		AA64-01384B	CABINET-BACK,BOT;43,54,62J8,-,HIPS,VO,BL	
..2		AA64-01395L	INLAY-TERMINAL;J9,PS SHEET,T0.5,BLK,P54A	
..2		AA61-00642A	SPRING-EARTH,MAIN;PROJ(J7,J8,J9),STS,67,	
..2		AA61-00618B	GUIDE-FLOW;54J8,J7,ABS,-,-,-,BLK,HB	

ASSY-WOOD

1		*AA90-00771A	ASSY-WOOD;PCL6215R3C/XAA,54J9	S.N.A
..2	CASCWB	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	
..2	CAWTO	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	
..2	CW+CWT	AA60-10051B	SCREW-WOOD;-,SWRCH18A,M3.5,L11,RH,+,-,-,	
..2	CWTHCH	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	
..2	CWTHPM	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	
..2	HCMCWB	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	
..2	HW+CWB	AA60-10051B	SCREW-WOOD;-,SWRCH18A,M3.5,L11,RH,+,-,-,	
..2	SPKCWB	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	
..2		AA64-01921A	CABINET-WOOD,BOT;62J9,WOOD SDE8326R	S.N.A
..2		AA63-00384A	COVER-DUCT;DP 54J8,-,-,HB,-,AA63-00348B,	
...3		AA63-00348B	COVER-DUCT;54,62J8,HIPS,-,HB,BLK,-,-	
..2		AA61-70053A	RAIL-PCB;SVP-524JA,ABS,-,-,-,BLK,VO	
..2		AA61-00644B	HOLDER-SENSOR;P54A(PRJT),PC,VIOLET	
..2		AA61-00556B	HOLDER-PLATE,MIRROR;43,53,62J8,ABS,-,-,-	
..2		AA65-00014C	CLAMP-WIRE;54J9,SINGLE NYLON,BLK	
..2		AA61-00722A	HOLDER-PIN,DABO;PRJT,NYLON,OD6.5XL25,-,-	
..2		AA61-00723A	HOLDER-PIN,DABO;PRJT,WOODEN NAIL,OD6XL20	
..2		AA64-01400B	CABINET-WOOD,TOP;62J9,SDE8326R,WOOD	S.N.A
..2		AA39-00220B	LEAD CONNECTOR ASSY;,12P,67096-012,67096	
..2		AA61-00616B	HOLDER-CRT,MAIN;54J7,DP,-,-,-,-,AA61-005	
...3		AA61-00506B	HOLDER-CRT,MAIN;43,54,62J8,HIPS,BLK,HB,-	
..2		AA61-00550B	HOLDER-PLATE,MIRROR;43,53,62J8,ABS,-,-,-	
..2		AA61-00458B	CASTER;-,-,TP4020-05 PLY,OH56,-,-,SR4	
..2		AA61-00284D	HOLDER-RAIL;DP,524J,-,-,-,AA61-00094C	S.N.A
...3		AA61-00094C	HOLDER-RAIL;-,PCJ533R,ABS,HB,BLK,480	
..2		AA61-00097A	HOLDER-WIRE;-,-,NYLON 6/6,-,NTR,-	
..2		AA60-00078A	SPACER-DUAL,LOCK;54J8,#250,-,-,-,-,-,-4	
..2		AA61-00507B	HOLDER-CABINET,WOOD;43,54,62J8,ABS,BLK,H	
..2		AA61-00533B	BRACKET-GRILLE;43,54,62J8,SECC-1 ,T0.5,-	
..2		AA61-00510G	HOLDER-SCREEN;62J8,ABS,-,-,-,BLK,HB	
..2		AA61-00510F	HOLDER-SCREEN;62J8,ABS,-,-,-,BLK,HB	

Loc. No.	Code No.	Description ; Specification	Remark
..2	AA61-00508C	HOLDER-JERSEY;54,62J9,ABS HB,BLK,HB,L40	S.N.A
..2	AA61-00508B	HOLDER-JERSEY;43,54,62J8,ABS,BLK,HB,-,-	

ASSY-FRONT,BOT

1	*AA91-00674A	ASSY-FRONT,BOT;DP,91-00672A SEA,62J9	
..2	AA91-00672A	ASSY-FRONT,BOT;,VO G4309,HIPS,62J9(PCL62	
...3	AA64-70124C	BADGE-BRAND;AL,R2500,SILVER,L=70,SAMSUNG	
...3	AA64-01744B	CABINET-FRONT,BOT;62J9(PCL6215R),HIPS V0	
...3	AA63-60131J	SPACER-FELT;54J9,62J9,FELT,-,-,-,-,T0.5,	S.N.A
...3	AA61-20129A	HOLDER-WIRE;-,-,NYLON-66,-,NTR,DAFC-2500	
...3	AA60-00090C	SPACER-JERSEY;62J9,JERSEY,-,-,-,GRAY,-,-	S.N.A
...3	AA60-00077A	SPACER-DUAL,LOCK;54J8,#250,-,-,-,-,-,-,4	

ASSY-PACKING

1	*AA92-00140A	ASSY-PACKING;F3 PJT	S.N.A
..2	AA69-90001A	SILICAGEL;M2,5GR,-,-,-	S.N.A
..2	AA61-30009A	LOCKER-BAND,CLIP;-,SPC-1,-,-,18MM T0.5,-	S.N.A
..2	AA69-30010A	BAG-SHEET;LDPE,T0.08,W220,L300,-,-,-	S.N.A

ASSY PCB CHASSISPACK

1	*AA93-00107C	ASSY PCB CHASSISPACK;,P54A,PCL6215R3C/XA	S.N.A
..2	AA95-00981B	ASSY-PCB 3D COMB;,WT-32Z5HD,K54A	
...3 CD10	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
...3 CD11	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD12	2401-002464	C-AL;47uF,20%,16V,BP,TP,8x11.5,5	
...3 CD18	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
...3 CD20	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD21	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD22	2203-001034	C-CERAMIC,CHIP;5.6nF,10%,50V,X7R,TP,1608	
...3 CD23	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
...3 CD24	2401-000455	C-AL;10uF,20%,35V,GP,TP,4x7mm,5mm	
...3 CD40	2301-000111	C-FILM,PEF;1.8nF,5%,50V,TP,6.5x3.0x5.5mm	
...3 CD41	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD42	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD43	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD44	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD45	2401-000455	C-AL;10uF,20%,35V,GP,TP,4x7mm,5mm	
...3 CD46	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD47	2401-000455	C-AL;10uF,20%,35V,GP,TP,4x7mm,5mm	
...3 CD50	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD51	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD52	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD53	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD54	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD55	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD56	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD57	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
...3 CD58	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD59	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
...3 CD60	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
...3 CD62	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD63	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD64	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
...3 CD66	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
...3 CD67	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD68	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
...3 CD69	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD71	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
...3 CD72	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD74	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD75	2203-000626	C-CERAMIC,CHIP;0.022nF,5%,50V,NP0,TP,160	
...3 CD80	2203-000357	C-CERAMIC,CHIP;0.15nF,5%,50V,NP0,TP,1608	
...3 CD81	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD84	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD85	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
...3 CD86	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD87	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD88	2203-000626	C-CERAMIC,CHIP;0.022nF,5%,50V,NP0,TP,160	
...3 CD89	2203-000626	C-CERAMIC,CHIP;0.022nF,5%,50V,NP0,TP,160	
...3 CD90	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD91	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CON01	3711-002705	CONNECTOR-HEADER;NOWALL,7P,1R,2.5mm,ANGL	
...3 CON02	3711-002703	CONNECTOR-HEADER;NOWALL,5P,1R,2.5mm,ANGL	
...3 DD01	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
...3 DD02	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
...3 DD03	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
...3 FD00	2909-001051	FILTER-LC;6MHz,6MHz,0.8dB,TP,5dB/6MHz,30	
...3 FD01	2909-001051	FILTER-LC;6MHz,6MHz,0.8dB,TP,5dB/6MHz,30	
...3 FD02	2909-001052	FILTER-LC;3.58MHz,3MHz,1.5dB,TP,11dB/1.0	
...3 FD03	2909-001051	FILTER-LC;6MHz,6MHz,0.8dB,TP,5dB/6MHz,30	
...3 IC01	1204-001556	IC-SEPARATOR;UPD64082GF,QFP,100P,-,PLAST	
...3 IC02	1105-001334	IC-DRAM;4E151612,1Mx16Bit,TSOP,44P,400	
...3 IC04	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
...3 JD01	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 JD04	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 LD01	2702-001095	INDUCTOR-RADIAL;18uH,10%,6x4mm	
...3 LD03	2702-001095	INDUCTOR-RADIAL;18uH,10%,6x4mm	
...3 LD05	2702-001096	INDUCTOR-RADIAL;33uH,10%,6x4mm	
...3 LD06	2702-001095	INDUCTOR-RADIAL;18uH,10%,6x4mm	
...3 LD07	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 LD09	2703-000271	INDUCTOR-SMD;4.7uH,10%,2x1.25x1.25mm	
...3 LD10	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
...3 PCB	AA41-00128E	PCB-3D COMB FILTER;CT-29A7DR,FR-4,2L,E,1	
...3 QD10	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD11	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...3 QD12	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...3 QD13	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD14	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...3 QD15	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...3 QD16	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...3 QD17	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD18	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...3 QD19	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD20	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...3 QD21	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD22	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...3 QD23	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD24	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD25	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...3 QD26	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD27	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD28	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
...3 QD40	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD41	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 RD00	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD01	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD02	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
...3 RD03	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD04	2007-000094	R-CHIP;22Kohm,5%,1/16W,DA,TP,1608	
...3 RD05	2007-000088	R-CHIP;7.5Kohm,5%,1/16W,DA,TP,1608	
...3 RD06	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RD07	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RD08	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
...3 RD09	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
...3 RD10	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD11	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD12	2007-000094	R-CHIP;22Kohm,5%,1/16W,DA,TP,1608	
...3 RD13	2007-000088	R-CHIP;7.5Kohm,5%,1/16W,DA,TP,1608	
...3 RD14	2007-000309	R-CHIP;10ohm,5%,1/16W,DA,TP,1608	
...3 RD15	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RD16	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
...3 RD17	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
...3 RD18	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD19	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
...3 RD20	2007-001093	R-CHIP;620ohm,5%,1/16W,DA,TP,1608	
...3 RD21	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
...3 RD22	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RD23	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
...3 RD24	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
...3 RD25	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
...3 RD26	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
...3 RD27	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
...3 RD37	2007-001093	R-CHIP;620ohm,5%,1/16W,DA,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
...3 RD38	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD39	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RD40	2007-000583	R-CHIP;22Kohm,1%,1/16W,DA,TP,1608	
...3 RD41	2007-000052	R-CHIP;10Kohm,1%,1/16W,DA,TP,1608	
...3 RD42	2007-000583	R-CHIP;22Kohm,1%,1/16W,DA,TP,1608	
...3 RD43	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
...3 RD50	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD51	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RD59	2007-000102	R-CHIP;100Kohm,5%,1/16W,DA,TP,1608	
...3 RD62	2007-000309	R-CHIP;10ohm,5%,1/16W,DA,TP,1608	
...3 RD63	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
...3 RD64	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RD65	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RD66	2007-000096	R-CHIP;30Kohm,5%,1/16W,DA,TP,1608	
...3 RD67	2007-000125	R-CHIP;3.9Kohm,5%,1/16W,DA,TP,1608	
...3 RD68	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
...3 RD69	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
...3 RD70	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
...3 RD71	2007-000234	R-CHIP;1.3Kohm,5%,1/16W,DA,TP,1608	
...3 RD72	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
...3 RD73	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD74	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
...3 RD75	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD76	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD77	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD78	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD79	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD82	2007-000309	R-CHIP;10ohm,5%,1/16W,DA,TP,1608	
...3 RD83	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
...3 RD84	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
...3 RD85	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
...3 RD86	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
...3 RD87	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
...3 RD88	2007-000211	R-CHIP;1.1Kohm,5%,1/16W,DA,TP,1608	
...3 RD89	2007-000113	R-CHIP;33ohm,5%,1/16W,DA,TP,1608	
...3 RD90	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD91	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
...3 RD92	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 RD93	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 RD94	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 RD95	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RD96	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
...3 RD97	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
...3 RD98	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 XTAL01	2801-000199	CRYSTAL-UNIT;20MHz,50ppm,28-AAA,16pF,50o	
...3	AA98-60005J	ASSY-SUB,PART;S51A,SOUND,NICAM,-	
....4	0202-001004	SOLDER-CREAM;SQ-2030M SZH-1,S63A,D0.04,6	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
...3	AA63-40014A	SHIELD-CASE,T;-,SPTE,T0.5,SCT51A,-	
..2	AA95-00996A	ASSY-PCB,DW-SRC;,PCL545R,P54A	
...3 CN01	3703-001124	CONNECTOR-DIN;32P,2R,MALE,ANGLE,AUF	
...3 CN02	3703-001124	CONNECTOR-DIN;32P,2R,MALE,ANGLE,AUF	
...3 CX01	2801-004019	CRYSTAL-UNIT;20.25MHz,30ppm,28-AAM,13pF,	
...3 DX01	2801-003811	CRYSTAL-UNIT;24.576MHZ,20PPM,28-AAM,30PF	
...3 PX01	2801-004019	CRYSTAL-UNIT;20.25MHz,30ppm,28-AAM,13pF,	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
...3	AA99-20088T	ASSY-PCB SUB,AUTO; AA95-00996A ,V	S.N.A
....4 CC01	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
....4 CC02	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CC03	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
....4 CC04	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
....4 CC05	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 CC06	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
....4 CC07	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CC08	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
....4 CC09	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 CC10	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CC11	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CC12	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CC13	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CC14	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CC15	2203-001646	C-CERAMIC,CHIP;3pF,0.5pF,50V,NPO,TP,2012	
....4 CC16	2203-001646	C-CERAMIC,CHIP;3pF,0.5pF,50V,NPO,TP,2012	
....4 CC17	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
....4 CC18	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
....4 CC19	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 CC20	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	

Loc. No.	Code No.	Description ; Specification	Remark
....4 CC21	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 CC22	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
....4 CC23	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 CC24	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 CC25	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 CC26	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 CC27	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 CC28	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 CC29	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
....4 CC30	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 CC31	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
....4 CC32	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
....4 CC33	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
....4 CC35	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 CC36	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 CC37	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
....4 CC38	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
....4 CC39	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
....4 CC40	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
....4 CC41	2203-000998	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,160	
....4 CC42	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 CC43	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CC44	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 CC45	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
....4 CC47	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CC48	2203-005384	C-CERAMIC,CHIP;4700nF,+80-20%,10V,Y5V,TP	
....4 CC49	2203-005384	C-CERAMIC,CHIP;4700nF,+80-20%,10V,Y5V,TP	
....4 CC50	2203-005384	C-CERAMIC,CHIP;4700nF,+80-20%,10V,Y5V,TP	
....4 CD01	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
....4 CD02	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
....4 CF01	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
....4 CF02	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
....4 CL03	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
....4 CL05	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 CL06	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 CL07	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 CQ01	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 CQ02	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 CQ03	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 CQ04	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 CQ05	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 CR01	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
....4 CR02	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
....4 CR03	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
....4 CR04	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
....4 CR05	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 CR06	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 CR07	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 CR08	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 CR09	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 CR10	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 CR12	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
....4 CR13	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
....4 CR14	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
....4 CR15	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
....4 CR16	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
....4 CR20	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 CR22	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 CR25	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
....4 CR27	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 CR28	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 CR29	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
....4 CR30	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
....4 CR31	2007-000643	R-CHIP;270ohm,5%,1/16W,DA,TP,1608	
....4 CR32	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
....4 CR33	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
....4 CR35	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 CR37	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 CR38	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 CR45	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 CR46	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 CR47	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
....4 CR48	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
....4 CR49	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
....4 CR50	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
....4 CR51	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
....4 CR52	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
....4 CR53	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
....4 CR54	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
....4 CR55	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
....4 CR56	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
....4 DC16	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 DC17	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 DC18	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 DC19	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 DC20	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 DC21	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
....4 DC22	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
....4 DC23	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 DC24	2203-001656	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,1608	
....4 DC25	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 DC26	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 DC27	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
....4 DC28	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 DC29	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 DC30	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 DC31	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 DC32	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 DC33	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 DC34	2203-000998	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,160	
....4 DC35	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 DC36	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
....4 DC37	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 DC38	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
....4 DC39	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
....4 DD01	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
....4 DD02	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
....4 DD03	0403-000689	DIODE-ZENER;DTZ5.1A,5.1V,4.84-5.04V,200m	
....4 DD06	0403-000689	DIODE-ZENER;DTZ5.1A,5.1V,4.84-5.04V,200m	
....4 DD07	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
....4 DL05	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 DL06	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 DL07	2702-001092	INDUCTOR-RADIAL;2.2uH,10%,6x4mm	
....4 DQ01	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
....4 DR16	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 DR17	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 DR18	2007-000101	R-CHIP;82Kohm,5%,1/16W,DA,TP,1608	
....4 DR19	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
....4 DR20	2007-000081	R-CHIP;2.7Kohm,5%,1/16W,DA,TP,1608	
....4 DR22	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 DR23	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
....4 DR24	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
....4 DR25	2007-000129	R-CHIP;27Kohm,5%,1/16W,DA,TP,1608	
....4 DR26	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 DR27	2007-000127	R-CHIP;9.1Kohm,5%,1/16W,DA,TP,1608	
....4 DR29	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 DR30	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 DR31	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 DR32	2007-000118	R-CHIP;390ohm,5%,1/16W,DA,TP,1608	
....4 DR33	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 DR34	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 DR35	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 DR36	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
....4 DR37	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 DR38	2007-000079	R-CHIP;1.8Kohm,5%,1/16W,DA,TP,1608	
....4 DR40	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 DR41	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 DR44	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 DR46	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
....4 IC01	1204-001598	IC-VIDEO PROCESS;VPC3230D-B2,QFP,80P,-,P	
....4 IC02	1204-001623	IC-VERTICAL PROCESSO;SDA9400,QFP,64P,-,P	
....4 IC03	1002-001045	IC-D/A CONVERTER;9280,8BIT,PLCC,68P,-,-,	
....4 IC06	1204-001372	IC-HOR./VER.PROCESSO;SDA9361,QFP,44P,-,P	
....4 IC07	1204-001550	IC-VIDEO PROCESS;CXA2101AQ,QFP,80P,-,PLA	
....4 IC11	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
....4 IC12	1203-001140	IC-VOL. DETECTOR;7039,TO-92P,3P,-,PLASTI	
....4 IC13	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
....4 PC01	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
....4 PC02	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 PC03	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
....4 PC04	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC05	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
....4 PC06	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 PC07	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
....4 PC08	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC09	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC10	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC11	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC12	2203-001646	C-CERAMIC,CHIP;3pF,0.5pF,50V,NPO,TP,2012	
....4 PC13	2203-001646	C-CERAMIC,CHIP;3pF,0.5pF,50V,NPO,TP,2012	
....4 PC14	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
....4 PC15	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
....4 PC16	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 PC17	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
....4 PC18	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 PC19	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
....4 PC20	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 PC21	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 PC22	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 PC23	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 PC24	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
....4 PC25	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 PC26	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
....4 PC27	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
....4 PC28	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
....4 PC29	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC30	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC31	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC32	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC33	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC34	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC35	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC36	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC37	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC38	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC39	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC40	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC41	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 PC42	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC43	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 PC47	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
....4 PC48	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
....4 PC49	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
....4 PC52	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
....4 PC53	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PC54	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
....4 PC55	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 PC56	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 PC57	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 PC58	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 PC78	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 PCB	AA41-00418A	PCB-DW SRC;PCL545R,FR-4,4L,A,1.6T,245X24	
....4 PIC01	1204-001598	IC-VIDEO PROCESS;VPC3230D-B2,QFP,80P,-,P	
....4 PIC02	1109-001144	IC-FIFO;81V04160,2x256Kx8Bit,TQFP,100P	
....4 PIC04	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
....4 PL01	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 PL02	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 PR01	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
....4 PR02	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
....4 PR03	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 PR04	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 PR06	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
....4 PR07	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
....4 PR08	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
....4 PR11	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
....4 PR12	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
....4 PR19	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
....4 PR20	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
....4 SC01	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 SC02	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC03	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 SC04	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC05	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC06	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC07	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC08	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC09	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC11	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC12	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC13	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC14	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
....4 SC21	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC22	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
....4 SC23	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC24	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC25	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 SC26	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
....4 SC27	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC28	2203-000552	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,1608	
....4 SC29	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC30	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 SC31	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 SC32	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC33	2203-000552	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,1608	
....4 SC34	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC35	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC36	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 SC37	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC38	2203-000552	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,1608	
....4 SC51	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 SC52	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SC53	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 SC54	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 SF01	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
....4 SL01	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 SL02	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 SL03	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 SL04	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 SL05	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 SL06	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 SL08	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
....4 SL09	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
....4 SR01	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 SR02	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 SR03	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 SR04	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
....4 SR05	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
....4 SR06	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
....4 SR07	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
....4 SR08	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 SR09	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 SR11	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 SR12	2007-001056	R-CHIP;6.2Kohm,5%,1/16W,DA,TP,1608	
....4 SR13	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
....4 SR14	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 SR15	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 SR16	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
....4 SR17	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 SR18	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 SR19	2007-000381	R-CHIP;13Kohm,5%,1/16W,DA,TP,1608	
....4 SR21	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
....4 SR22	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 SR23	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 SR24	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 SR25	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP,2012	
....4 YC01	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC02	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC03	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC04	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC05	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC06	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC07	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC08	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC09	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC10	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC11	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC12	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC13	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC14	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC15	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC16	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC17	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC18	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC19	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC20	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC21	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 YC22	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC23	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
....4 YC24	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC25	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC26	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 YC27	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 YC28	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 YC29	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 YC30	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC31	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
....4 YC32	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 YC33	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 YC34	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 YC35	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 YC36	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 YC37	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 YC38	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
....4 YC39	2203-000998	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,160	
....4 YC40	2203-000998	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,160	
....4 YC45	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC46	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 YC47	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 YC48	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 YC49	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC50	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 YC51	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
....4 YC52	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
....4 YC53	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC54	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC55	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC56	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC57	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 YC58	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC59	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC60	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 YC62	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
....4 YC63	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
....4 YC66	2203-000815	C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP,160	
....4 YD01	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
....4 YD02	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
....4 YD03	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
....4 YD04	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
....4 YD05	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
....4 YF01	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
....4 YF02	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
....4 YF03	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
....4 YF04	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
....4 YF05	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
....4 YL01	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
....4 YL02	2702-000160	INDUCTOR-RADIAL;4.7uH,10%,6x6.4mm	
....4 YQ01	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
....4 YQ02	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
....4 YQ03	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
....4 YQ06	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 YQ08	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
....4 YQ11	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 YQ12	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 YR05	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR06	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR07	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR08	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR09	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR10	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR100	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR101	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR102	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR103	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR104	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR105	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR11	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR12	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR14	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
....4 YR15	2007-000939	R-CHIP;47Kohm,1%,1/16W,DA,TP,1608	
....4 YR18	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR23	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 YR24	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 YR25	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR26	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR27	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
....4 YR28	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR29	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
....4 YR30	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR31	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
....4 YR32	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR33	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
....4 YR40	2007-000691	R-CHIP;3.3Mohm,5%,1/16W,DA,TP,1608	
....4 YR41	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR43	2007-000799	R-CHIP;360ohm,5%,1/16W,DA,TP,1608	
....4 YR44	2007-000799	R-CHIP;360ohm,5%,1/16W,DA,TP,1608	
....4 YR45	2007-000799	R-CHIP;360ohm,5%,1/16W,DA,TP,1608	
....4 YR46	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR47	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR48	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR50	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
....4 YR51	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR53	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR56	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR59	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 YR60	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR61	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
....4 YR62	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 YR63	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR64	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR65	2007-000583	R-CHIP;22Kohm,1%,1/16W,DA,TP,1608	
....4 YR77	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
....4 YR78	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
....4 YR79	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
....4 YR83	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR85	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR86	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR88	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 YR89	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 YR90	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR91	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR92	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 YR98	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 YR99	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
...3	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	
..2	AA95-01103A	ASSY-PCB,SOUND;,PCL5415R,P54A	
...3 CN601	3703-001175	CONNECTOR-DIN;64P,2R,MALE,ANGLE,AU	
...3 XD601	2801-000186	CRYSTAL-UNIT;18.432MHz,25ppm,28-AAM,8pF,	
...3	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
...3	AA99-20091S	ASSY-PCB SUB,AUTO; AA95-01103A ,V	S.N.A
....4 CD601	2401-000444	C-AL;10uF,20%,25V,GP,TP,5x5mm,5mm	
....4 CD602	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CD603	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
....4 CD604	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
....4 CD605	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
....4 CD606	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CD607	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
....4 CD608	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
....4 CD609	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
....4 CD610	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
....4 CD611	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
....4 CD612	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
....4 CD613	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CD614	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
....4 CD616	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
....4 CD617	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
....4 CD618	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
....4 CD619	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
....4 CD620	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
....4 CD621	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
....4 CD622	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
....4 CD623	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
....4 CD624	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
....4 CD625	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
....4 CD626	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
....4 CD627	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
....4 CD628	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
....4 CD629	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 CD630	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
....4 CD631	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CD632	2401-000444	C-AL;10uF,20%,25V,GP,TP,5x5mm,5mm	
....4 CD633	2203-000332	C-CERAMIC,CHIP;0.012nF,5%,50V,NP0,TP,160	
....4 CD634	2203-000332	C-CERAMIC,CHIP;0.012nF,5%,50V,NP0,TP,160	
....4 CD635	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
....4 CD636	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
....4 CD637	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
....4 CD638	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
....4 CD639	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 CD640	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CD641	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 CD642	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 CD643	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
....4 CD648	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 CD649	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 CD650	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
....4 CD652	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
....4 CD653	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
....4 CD654	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
....4 CD660	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
....4 CD662	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 CD670	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
....4 ICD601	1204-001631	IC-SOUND PROCESSOR;MSP3450G,QFP,80P,-,PL	
....4 ICD602	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	
....4 LD601	2701-001032	INDUCTOR-AXIAL;100uH,10%,5x14mm	
....4 LD602	2701-001032	INDUCTOR-AXIAL;100uH,10%,5x14mm	
....4 LD603	2701-001032	INDUCTOR-AXIAL;100uH,10%,5x14mm	
....4 PCB	AA41-00335A	PCB-SOUND;PCL545R,FR-4,2L,A,1.6T,180X245	
....4 RD601	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD602	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD603	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD604	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD605	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD606	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD607	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD608	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD609	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD610	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 RD611	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 RD613	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 RD614	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 RD615	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 RD616	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD617	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD618	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 RD619	2007-001179	R-CHIP;8.2Kohm,5%,1/16W,DA,TP,1608	
....4 RD620	2007-000134	R-CHIP;33Kohm,5%,1/16W,DA,TP,1608	
....4 RD621	2007-001010	R-CHIP;51Kohm,5%,1/16W,DA,TP,1608	
....4 RD622	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
....4 RD623	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
....4 RD624	2007-001010	R-CHIP;51Kohm,5%,1/16W,DA,TP,1608	
....4 RD625	2007-001179	R-CHIP;8.2Kohm,5%,1/16W,DA,TP,1608	
....4 RD626	2007-000134	R-CHIP;33Kohm,5%,1/16W,DA,TP,1608	
....4 RD627	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 RD628	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD629	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 RD638	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
..2	AA90-00136N	ASSY-PACKING,PCB;J51A NO-T/BOARD,PJT	S.N.A
...3 CHASIS	AA61-30009A	LOCKER-BAND,CLIP;-,SPC-1,-,-,18MM T0.5,-	S.N.A
..2	AA90-00770A	ASSY CHASSIS PART;P54A SEA,62J9	S.N.A
...3 PM+HC	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
...3 PP+HC	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
...3 PS+HC	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
...3	AA61-00504B	HOLDER-CHASSIS;43,54,62J8,ABS,GRAY,VO,-,	
..2	AA95-00799A	ASSY PCB POWER;PCL545R,P54A,53	
...3 C812	2401-000701	C-AL;2200uF,20%,250V,GP,-,35x70mm,1	
...3 C813	2401-000701	C-AL;2200uF,20%,250V,GP,-,35x70mm,1	
...3 C831	2306-000323	C-FILM,MPPF;2.2nF,5%,1.6KV,TP,28.5x15.5x	
...3 C862	2401-003076	C-AL;3300uF,20%,50V,WP,BK,18x35.5mm	
...3 C865	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
...3 C868	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
...3 C875	2401-002251	C-AL;470uF,20%,200V,GP,BK,25x40mm,1	
...3 CN802	AA39-00116A	LEAD CONNECTOR-ASSY;,12P,YBNH250-12,3515	
...3 CN803	AA39-00116A	LEAD CONNECTOR-ASSY;,12P,YBNH250-12,3515	
...3 CX801S	2306-000112	C-FILM,MPPF;100nF,20%,250V,BK,-,15mm	
...3 CX802S	2306-000112	C-FILM,MPPF;100nF,20%,250V,BK,-,15mm	
...3 CY801S	2201-000987	C-CERAMIC,DISC;2.2nF,20%,400V,Y5U,TP,12.	
...3 CY802S	2201-000987	C-CERAMIC,DISC;2.2nF,20%,400V,Y5U,TP,12.	
...3 D801S	AA96-50310A	ASSY-H/S;-,POWER,AA62-30150C,RBV606,-	
....4	AA62-30150C	HEAT SINK-ES;-,A6063 EXTR,-,WHT,40(24.5)	

Loc. No.	Code No.	Description ; Specification	Remark
....4	AA60-30003A	WASHER;-,-,-,T1.5,-,SBHG-1,-	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
....4	0402-000549	DIODE-BRIDGE;RBV606,600V,6A,-,BK	
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	
...3 D810	0402-000250	DIODE-RECTIFIER;RG4C,1000V,1A,-	
...3 D854	AA96-50153C	ASSY-H/S;-,-,AA62-30013D,FLM-G12S,-	
....4	0402-000233	DIODE-RECTIFIER;FML-G12S,200V,5A,-,-	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
....4	AA62-30013D	HEAT SINK-ES;-,A6063 EXTR,-,-,55(21) T02	
...3 D855	AA96-50153C	ASSY-H/S;-,-,AA62-30013D,FLM-G12S,-	
...3 D856	AA96-50153C	ASSY-H/S;-,-,AA62-30013D,FLM-G12S,-	
...3 D857	AA96-50153C	ASSY-H/S;-,-,AA62-30013D,FLM-G12S,-	
...3 D858	AA96-50153C	ASSY-H/S;-,-,AA62-30013D,FLM-G12S,-	
...3 D859	AA96-50153A	ASSY-H/S;-,TR,AA62-30013D,FMG-26S,-	
....4	0402-000231	DIODE-RECTIFIER;FMG-G26S,600V,4A,TO-220F	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
....4	AA62-30013D	HEAT SINK-ES;-,A6063 EXTR,-,-,55(21) T02	
...3 FD802S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
...3 FD804S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
...3 FD855S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
...3 FP801S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
...3 IC801S	AA96-00035A	ASSY-H/S;-,POWER,AA62-30181P,STR-F6656,	
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
....4	AA13-00018A	IC-HYBRID;-,STR-F6656,LF1351,5PIN,-,-	
....4	AA62-30181P	HEAT-SINK,ES;-,-,T1.0,WHITE,SCREW-HOLE(2	
...3 IC804	1203-001400	IC-POWER PRESCALER;SE110N,T0-220(SIP),3P	
...3 LX801S	AA29-30002L	FILTER-LINE NOISE;-,10mHMIN,5A,AC90~260V	
...3 LX802S	AA29-30002M	FILTER-LINE NOISE;-,1mHMIN,5A,AC90~260V,	
...3 LX803S	AA29-30002M	FILTER-LINE NOISE;-,1mHMIN,5A,AC90~260V,	
...3 NT801S	1404-001195	THERMISTOR-NTC;5.1ohm,15%,2900,27mW/C,BK	
...3 PC801S	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4,ST	
...3 PCB	AA41-00342A	PCB-POWER;PCL545R,CEM-1,1L,A,1.6T,330X24	
...3 R817	2009-001096	R-METAL PLATE;0.07ohm,5%,5W,CL,BK,5x14x1	
...3 R841	2008-001096	R-FUSIBLE(S);3.3OHM,5%,1/2W,AC,BK,2.5X6.	
...3 T801S	AA26-00099A	TRANS SWITCHING;EER5345,PCL544R,AC220V,1	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
...3	AA99-20081T	ASSY-PCB SUB,AUTO; AA95-00799A ,V	S.N.A
....4 C809	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
....4 C814	2201-002041	C-CERAMIC,DISC;0.82nF,10%,2kV,Y5P,TP,9x5	
....4 C815	2201-000406	C-CERAMIC,DISC;0.27nF,10%,2kV,Y5P,TP,6.3	
....4 C816	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
....4 C817	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
....4 C818	2301-001216	C-FILM,PPF;47nF,5%,630V,TP,20x14.5x22,7.	
....4 C819	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
....4 C833	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
....4 C834	2401-003028	C-AL;100uF,20%,25V,WT,TP,6.3x11,5	
....4 C851	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
....4 C852	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
....4 C853	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
....4 C854	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
....4 C855	2401-000703	C-AL;2200uF,20%,25V,GP,-,12.5x25mm,	
....4 C861	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
....4 C864	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
....4 C871	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
....4 C872	2401-000703	C-AL;2200uF,20%,25V,GP,-,12.5x25mm,	
....4 C874	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
....4 C877	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
....4 D834	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D843	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D851	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
....4 D853	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 DZ858	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
....4 F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 F802A	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 F802B	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 F804A	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 F804B	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 F855A	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 F855B	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 FD805S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
....4 FD806S	3601-001065	FUSE-AXIAL LEAD;125V,3.5A,FAST-ACTING,CE	
....4 FD854S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
....4 FD871S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
....4 L806	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L807	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L808	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L810	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L811	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L812	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L813	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L814	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L815	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L816	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L831	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L832	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L851	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L857	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L859	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 Q801	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 R808	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R808A	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R812	2003-002170	R-METAL OXIDE(S);15Kohm,5%,2W,AG,TP,3.9x	
....4 R814	2003-002170	R-METAL OXIDE(S);15Kohm,5%,2W,AG,TP,3.9x	
....4 R815	2003-000512	R-METAL OXIDE(S);15Kohm,5%,3W,AA,TP,6x16	
....4 R815A	2003-000512	R-METAL OXIDE(S);15Kohm,5%,3W,AA,TP,6x16	
....4 R832	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R834	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R837	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R838	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R855	2001-001196	R-CARBON(S);9.1KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R871	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R872	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R873	2004-004366	R-METAL(S);1.3Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R874	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R875	2004-004366	R-METAL(S);1.3Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 RP801S	2002-001010	R-COMPOSITION;1.8Mohm,5%,1/2W,AA,TP,3.7x	
....4 RX801S	2002-001011	R-COMPOSITION;3.3Mohm,5%,1/2W,AA,TP,3.7x	
....4 RY801S	2002-001013	R-COMPOSITION;4.7Mohm,5%,1/2W,AA,TP,3.7x	
....4 VP801S	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
....4 VX801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
..2	AA94-03388C	ASSY PCB MAIN(OPT);PCL5415R3C/XAA,P54A,U	
...3 C664	2401-001068	C-AL;3300uF,20%,50V,GP,BK,22x40,10	
...3 C665	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
...3 CG-BOT	AA63-00397B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,SOUN	
...3 CG-TOP	AA63-00396B	SHIELD CASE-TOP;PRJT,P54A,SPTE,T0.5,SOUN	
...3 CN01	3703-001150	CONNECTOR-DIN;32P,2R,FEMALE,STRAIGHT,AUF	
...3 CN02	3703-001150	CONNECTOR-DIN;32P,2R,FEMALE,STRAIGHT,AUF	
...3 CNM01	3703-001187	CONNECTOR-DIN;64P,2R,FEMALE,STRAIGHT,AU	
...3 CNS01	3703-001187	CONNECTOR-DIN;64P,2R,FEMALE,STRAIGHT,AU	
...3 CNT01	3710-001208	CONNECTOR-SOCKET;32P,2R,2.54mm,STRAIGHT,	
...3 CNT02	3710-001208	CONNECTOR-SOCKET;32P,2R,2.54mm,STRAIGHT,	
...3 CNZ01	3703-001150	CONNECTOR-DIN;32P,2R,FEMALE,STRAIGHT,AUF	
...3 DW-BOT	AA63-00395B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,D/W	
...3 DW-TOP	AA63-00394B	SHIELD CASE-TOP;PRJT P54A,SPTE,T0.5,D/W	
...3 IC102	AA96-00110C	ASSY-H/S;-,-,AA62-30013K,SI-3090C,-	
....4	1203-000577	IC-VOLTAGE REGUATOR;3090,ZIP,5P,-,PLASTI	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
....4	AA62-30013K	HEATSINK-ES;-,-,-,-,44/18,-,WHT,A6063 EX	
...3 IC104	AA96-00110A	ASSY-H/S;-,-,AA62-30013K,SI-3050C,-	
....4	1203-000203	IC-POSI.ADJUST REG.;3050,TO-220,5P,-,PLA	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
....4	AA62-30013K	HEATSINK-ES;-,-,-,-,44/18,-,WHT,A6063 EX	
...3 IC106	AA96-00110A	ASSY-H/S;-,-,AA62-30013K,SI-3050C,-	
...3 IC655	AA96-00038A	ASSY-H/S;-,SOUND AMP,AA62-30173E,TDA726	
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	
....4	1201-001026	IC-POWER AMP;7265,ZIP,11P,19.6MIL,DUAL,1	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
....4	AA62-30173E	HEAT-SINK,ES;-,-,T1.0,WHITE,SCREW-HOLE(1	
...3 ICZ101	AA96-00110A	ASSY-H/S;-,-,AA62-30013K,SI-3050C,-	
...3 ICZ102	1203-000121	IC-NEGA.FIXED REG.;7906,TO-220,3P,-,PLAS	
...3 L601	AA29-00004A	FILTER-LINE NOISE;-,20UH,3A,AC80-260V,TQ	
...3 L602	AA27-10001C	COIL-CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
...3 MI-BOT	AA63-00397B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,SOUN	
...3 MI-TOP	AA63-00396B	SHIELD CASE-TOP;PRJT,P54A,SPTE,T0.5,SOUN	
...3 SO-BOT	AA63-00397B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,SOUN	
...3 SO-TOP	AA63-00396B	SHIELD CASE-TOP;PRJT,P54A,SPTE,T0.5,SOUN	
...3 TU103S	AA59-00164A	MODULE-RF,SPLITTER;-,UMX-NT-005,-,2IN/3O	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
...3	AA65-30105B	CLAMP-WIRE;NYLON 66,V2,NTR,25MM,ALL MODE	
...3	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	AA39-20010F	LEAD CONNECTOR-ASSY;,1P,YFH800-01,S,700,	
...3	AA99-30217J	ASSY-PCB ROBOT; AA94-03388C ,ER	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4 CN201	3711-003974	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
....4 CN501	3711-003051	CONNECTOR-HEADER;BOX,8P,1R,2.5mm,STRAGHT	
....4 CN801	3711-003975	CONNECTOR-HEADER;BOX,14P,1R,2.5mm,STRAIG	
....4 CN901	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
....4 CNZ02	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5mm,STRAGH	
....4 IC103	AA96-50147B	ASSY-H/S;-,TR,AA62-30012B,KA7808,-	
.....5	1203-000293	IC-POSI.FIXED REG.;7808,TO-220,3P,-,PLAS	
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
.....5	AA62-30012B	HEAT SINK-ES;-,A6063 EXTR,-,-,45(16) T02	
....4 IC107	AA96-00111L	ASSY-H/S;-,-,AA62-30013L,KA78R12,-	
.....5	1203-000165	IC-POSI.ADJUST REG.;78R12,TO-220,3P,-,-	
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
.....5	AA62-30013L	HEATSINK-ES;-,-,-,-,44/22,-,WHT,-,-,-,-	
....4 TU101S	AA40-00032A	TUNER-F/S;TCPN3081PC09A(S),NTSC,TR,181CH	
....4 TU102S	AA40-00032A	TUNER-F/S;TCPN3081PC09A(S),NTSC,TR,181CH	
....4	AA99-10211U	ASSY-PCB MAIN,AUTO; AA99-30217J ,V	S.N.A
.....5 C100	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
.....5 C101	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
.....5 C102	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
.....5 C103	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
.....5 C104	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
.....5 C105	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
.....5 C106	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 C107	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 C110	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
.....5 C111	2201-000180	C-CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3,5	
.....5 C117	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C118	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C119	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
.....5 C120	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
.....5 C121	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
.....5 C122	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
.....5 C123	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C124	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C125	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C126	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
.....5 C127	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C128	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C129	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 C130	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 C131	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
.....5 C132	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
.....5 C133	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C134	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C135	2401-003034	C-AL;220uF,20%,16V,WT,TP,8x11.5,5	
.....5 C136	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 C137	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
.....5 C138	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
.....5 C140	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C142	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
.....5 C144	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C145	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C146	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C147	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C149	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C150	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C151	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C152	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C153	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C154	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C155	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C157	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C191	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
.....5 C666	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C667	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
.....5 C668	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
.....5 C676	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
.....5 C686	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
.....5 C687	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
.....5 C688	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
.....5 C689	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C690	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C691	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
.....5 C701	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C801	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
.....5 C901	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
.....5 C902	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C903	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 CN101	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,STRAIGH	
.....5 CN601	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	
.....5 CN902	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,STRAIGH	
.....5 CNY01	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5MM,STRAIGH	
.....5 CZ101	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
.....5 CZ102	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 CZ103	2401-000689	C-AL;2200uF,20%,16V,GP,TP,13x25,5	
.....5 CZ104	2401-000689	C-AL;2200uF,20%,16V,GP,TP,13x25,5	
.....5 CZ105	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 CZ106	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 CZ107	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 CZ108	2201-000982	C-CERAMIC,DISC;10nF,+80-20%,50V,Y5V,TP,4	
.....5 CZ109	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 CZ110	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 D603	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D604	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D605	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D606	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D664	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
.....5 D665	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D701	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D702	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D703	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 DZ128	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
.....5 DZ665	0403-001039	DIODE-ZENER;MA2560,56V,52-60V,1W,DO-41,T	
.....5 DZ701	0403-001140	DIODE-ZENER;RD10ESAB-T4,10V,9.19-10.30V,	
.....5 DZ801	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
.....5 L100	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
.....5 L101	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 L102	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
.....5 L103	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 L104	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 L105	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 L107	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 L108	2701-001007	INDUCTOR-AXIAL;24uH,10%,4.5x14mm	
.....5 L110	2701-000116	INDUCTOR-AXIAL;10uH,10%,4.2x9.8mm	
.....5 L111	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 L112	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 L113	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 L603	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 L604	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 L605	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 L901	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 LDZ101	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
.....5 LDZ102	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
.....5 LZ101	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
.....5 LZ102	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
.....5 LZ103	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
.....5 LZ104	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
.....5 PCB	AA41-00332B	PCB-MAIN;PCL545R,FR-1,1L,A,1.6T,330X245	
.....5 Q601	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q666	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q668	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q701	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q702	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 R102	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R103	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R104	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R105	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R106	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R107	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R110	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R111	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R112	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R113	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R115	2001-000869	R-CARBON;56OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R117	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R602	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R603	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R604	2001-001168	R-CARBON(S);6.8KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R605	2001-001106	R-CARBON(S);220KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R661	2004-001970	R-METAL;1.8Kohm,1%,1/2W,AA,TP,6.5x2.5m	
.....5 R662	2004-001970	R-METAL;1.8Kohm,1%,1/2W,AA,TP,6.5x2.5m	
.....5 R663	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R664	2004-001970	R-METAL;1.8Kohm,1%,1/2W,AA,TP,6.5x2.5m	
.....5 R665	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R666	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R669	2001-001121	R-CARBON(S);3.6KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R670	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R671	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R672	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R673	2001-001086	R-CARBON(S);18KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R673A	2001-001144	R-CARBON(S);4.7KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R681	2004-001970	R-METAL;1.8Kohm,1%,1/2W,AA,TP,6.5x2.5m	
.....5 R682	2004-002019	R-METAL(S);33Kohm,1%,1/2W,AA,TP,2.5x6.5m	
.....5 R683	2004-002019	R-METAL(S);33Kohm,1%,1/2W,AA,TP,2.5x6.5m	
.....5 R685	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
.....5 R686	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
.....5 R687	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R689	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R690	2001-001144	R-CARBON(S);4.7KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R691	2001-001144	R-CARBON(S);4.7KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R701	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R702	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R703	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R704	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R888	2003-001098	R-METAL OXIDE(S);22Kohm,5%,3W,AA,TP,6x16	
.....5 RF101	2008-001116	R-FUSIBLE(S);0.68ohm,10%,2W,AG,TP,3.9x12	
.....5 RF104	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
.....5 RF121	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
.....5 RZ01	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 RZ02	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 RZ101	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RZ102	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
..2	AA95-00705A	ASSY-PCB,SUB;,PCL545R,P54A	
...3 C432	2306-000267	C-FILM,MPPF;8.2nF,5%,1.6KV,TP,28.5x18.5x	
...3 C438	2306-000267	C-FILM,MPPF;8.2nF,5%,1.6KV,TP,28.5x18.5x	
...3 C445	2401-001622	C-AL;6.8uF,20%,50V,BP,TP,16x25mm,7.	
...3 C481	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
...3 C491	2306-000322	C-FILM,MPPF;12nF,5%,1.6KV,TP,29x20.5x13,	
...3 C876	2401-000787	C-AL;220uF,20%,160V,GP,TP,16x31.5mm	
...3 CN202	AA39-00116A	LEAD CONNECTOR-ASSY;,12P,YBNH250-12,3515	
...3 CN801	AA39-00180A	LEAD CONNECTOR ASSY;,14P,YBNH250-14,3515	
...3 CN802	3711-003974	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
...3 CN803	3711-003974	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
...3 CNW801	AA39-20061G	LEAD CONNECTOR-ASSY;,3P,YFH800-03,S,100M	
...3 CNZ02	AA39-00115A	LEAD CONNECTOR-ASSY;,10P,YBNH250-10,3515	
...3 CR430S	2301-001343	C-FILM,MPPF;3.9nF,5%,2kV,TP,29x9.5x16mm,	
...3 CR431S	2301-001343	C-FILM,MPPF;3.9nF,5%,2kV,TP,29x9.5x16mm,	
...3 CR436S	2306-000235	C-FILM,MPPF;560nF,5%,400V,TP,26*22.5*14,	
...3 CR471S	2301-001091	C-FILM,MPPF;470nF,5%,400V,TP,26x21.5x14.	
...3 CR473S	2306-000322	C-FILM,MPPF;12nF,5%,1.6KV,TP,29x20.5x13,	
...3 CR474S	2306-000326	C-FILM,MPPF;4.7nF,5%,1.6KV,TP,28.5x16x9m	
...3 CS803	2401-003370	C-AL;47uF,20%,450V,GP,BK,16X35.5,7.	
...3 CY811S	2201-000446	C-CERAMIC,DISC;3.3nF,20%,400V,Y5U,TP,15x	
...3 CY812S	2201-000446	C-CERAMIC,DISC;3.3nF,20%,400V,Y5U,TP,15x	
...3 D464	0402-000236	DIODE-RECTIFIER;GI824,400V,5A,-,TP	
...3 D811S	0402-000102	DIODE-BRIDGE;D2SB60,600V,1.5A,-	
...3 IC301	AA96-50406A	ASSY-H/S;-,-,AA62-30180K,LA7845,-	
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	
....4	1204-000517	IC-VERTIVAL DEF.;LA7845,SIP,7P,-,PLASTIC	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
....4	AA62-30180K	HEAT SINK-ES;-,A6063 EXTR,-,WHT,50/13,-,	
...3 IC421	1203-000165	IC-POSI.ADJUST REG.;78R12,TO-220,3P,-,-,	
...3 IC430	1203-000162	IC-POSI.ADJUST REG.;317,TO-220,3P,-,PLAS	
...3 IC431	1201-000191	IC-OP AMP;4558,DIP,8P,300MIL,DUAL,20V/mV	
...3 IC471	1203-000610	IC-PWM CONTROLLER;494,DIP,16P,300MIL,PLA	
...3 ICS801	AA13-00024A	IC-HYBRID;-,TNY253P,-,8PIN,-,-	
...3 ICS807	AA96-00111P	ASSY H/S;-,MAIN,AA62-30013L,KA278RA05,F	
....4	1203-001978	IC-VOLTAGE REGULATOR;KA278RA05,TO-220F,4	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
....4	AA62-30013L	HEATSINK-ES;-,-,-,-,44/22,-,WHT,-,-,-,-	
...3 ICZ103	AA96-00034A	ASSY-H/S;-,CONVERGENCE,AA62-30173D,STK3	
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	
....4	1201-001225	IC-VIDEO AMP;392,SIP,22P,-,TRIPLE,-,PLAS	
....4	6003-001021	SCREW-TAPTITE;RH,+,B,M3,L15,ZPC(YEL),SWR	
....4	AA62-30173D	HEAT SINK-ES;-,-,T1.0,WHITE,SCREW-HOLE(2	
...3 ICZ104	AA96-00034A	ASSY-H/S;-,CONVERGENCE,AA62-30173D,STK3	
...3 L432	AA27-00095A	COIL HORIZ. WIDTH;-,600uH,YL9N 15x27.5 C	
...3 L434	AA27-00174A	COILHORIZ.WIDTH;600UH,600UH,SB-5SOS6X20,	
...3 L435	AA27-10001C	COIL-CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
...3 L482	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
...3 L494	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	

Loc. No.	Code No.	Description ; Specification	Remark
...3 L854	AA27-10001C	COIL-CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
...3 L860	AA27-10001C	COIL-CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
...3 L862	AA27-10001C	COIL-CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
...3 L872	AA27-10001C	COIL-CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
...3 L874	AA27-10002L	COIL-CHOKE;-,24UH,K,-,2A,-,24UH-K,10X10M	
...3 LC431S	AA27-30003M	COIL-LINEARLITY;-,5uH,OWA14x15,USRC0.1x6	
...3 PC811S	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4,ST	
...3 PCB	AA41-00340B	PCB-SUB;PCL545R,CEM-1,1L,B,1.6T,330X24	
...3 Q353	0502-000442	TR-POWER;2SC4636RB,NPN,2W,TO-220,ST,10-	
...3 Q431	AA96-00033E	ASSY H/S;-,H-OUT,AA62-30173C,2SC5446, F	
....4	AA02-00007A	MICA;DPM-04,MICA,22x29x0.15mm	
....4	AA62-30173C	HEAT SINK-ES;-,-,T1.0,WHITE,SCREW-HOLE(2	
....4	AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,-,SBHG	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
....4	0502-001175	TR-POWER;2SC5446,NPN,200000mW,TO-3PL,BK	
....4	0402-001296	DIODE-RECTIFIER;FMP-3FU,1.5KV,5A,TO-3PF,	
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	
...3 Q433	AA96-50407A	ASSY-H/S;-,-,AA62-30154G,KSD73Y,-	
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	
....4	0502-000298	TR-POWER;KSD73,NPN,30000mW,TO-220,TP,12	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
....4	AA62-30154G	HEAT SINK-ES;-,A6063 EXTR,-,WHT,50/16,-,	
...3 Q441	AA96-50383F	ASSY-H/S;-,-,AA62-30180D,2SD921,-	
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	
....4	0502-001104	TR-POWER;2SD921,NPN,80W,TO-3P,BK,700-	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
....4	AA62-30180D	HEAT SINK-ES;-,A6063 EXTR.,2,WHT,50mm,-,	
...3 Q473	AA96-00037A	ASSY-H/S;-,-,AA62-30181N,2SC4125, IRFS6	
....4	0502-001100	TR-POWER;2SC4125,NPN,70W,TO-3PML,BK,8-	
....4	AA62-30181N	HEAT-SINK,ES;-,-,T1.0,WHITE,SCREW-HOLE(2	
....4	AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,-,SBHG	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
....4	0505-001202	FET-SILICON;IRFS640A,N,200V,9.8A,0.18ohm	
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	
...3 RL811S	3501-001053	RELAY-POWER;5Vdc,530mW,10A,1FormA,15mS,5	
...3 RL812S	3501-001040	RELAY-POWER;12VDC,500mW,10A,1FormA,15mS,	
...3 T431	AA26-50001U	TRANS-HORIZ.DRIVE;-,28mH,105uH,4uH,ER28x	
...3 T432	AA26-00012A	TRANS-DUMMY;-,1.3MH,EER4445,110V/7.6V/21	
...3 T433	AA26-00011A	TRANS-DUMMY;-,3.5MH,EE2834,-,BK	
...3 T444S	AA26-00100A	TRANS FBT;FFA97513L,CT29A7DR,0.3mH,-,-,-	
...3 T461	AA26-50001V	TRANS-HORIZ.DRIVE;-,6.0mH,113uH,4uH,EI19	
...3 T481	AA26-00091A	TRANS-HV-STORAGE;4mH,-,14P,830uH,180V,10	
...3 TS811S	AA26-00055B	TRANS SWITCHING;,HLK436W,AC80V,AC80~280V	
...3	AA65-30104B	CLAMP-WIRE;NYLON 66,V2,BLK,W2 Z5,ALL MOD	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
...3	AA99-20081X	ASSY-PCB SUB,AUTO; AA95-00705A ,V	S.N.A
....4 C301	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
....4 C302	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
....4 C303	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
....4 C304	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
....4 C305	2201-002022	C-CERAMIC,DISC;0.005nF,0.25pF,500V,NP0,T	
....4 C307	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
....4 C308	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
....4 C309	2305-000285	C-FILM,MPEF;220NF,5%,100V,TP,10.5X5.5X15	
....4 C311	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C351	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
....4 C352	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
....4 C353	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C354	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
....4 C355	2201-000991	C-CERAMIC,DISC;0.56nF,10%,2kV,Y5P,TP,7.5	
....4 C405	2201-000558	C-CERAMIC,DISC;0.47nF,10%,50V,Y5P,TP,5x3	
....4 C406	2201-000370	C-CERAMIC,DISC;0.22nF,10%,50V,Y5P,TP,4x3	
....4 C412	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
....4 C413	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
....4 C417	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
....4 C418	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
....4 C419	2201-000180	C-CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3,5	
....4 C426	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
....4 C427	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
....4 C428	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
....4 C429	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
....4 C437	2401-003114	C-AL;4.7uF,20%,250V,WT,TP,10x16,5	
....4 C450	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
....4 C451	2401-001160	C-AL;33uF,20%,160V,GP,-,16x35mm,7.5	
....4 C452	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
....4 C453	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
....4 C454	2401-001428	C-AL;470uF,20%,50V,GP,TP,10x20,5	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C455	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
....4 C456	2401-001527	C-AL;47uF,20%,250V,HR,TP,13x25mm,5m	
....4 C457	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
....4 C458	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
....4 C459	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
....4 C460	2303-000331	C-FILM,PPF;4.7nF,5%,630V,TP,19.5x12x7,7.	
....4 C467	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
....4 C468	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C469	2201-000180	C-CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3,5	
....4 C472	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
....4 C476	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
....4 C477	2301-000213	C-FILM,PEF;220nF,5%,250V,TP,21.5x11,7.5	
....4 C478	2301-000020	C-FILM,PEF;27nF,5%,100V,TP,7.3x4x12.5mm,	
....4 C479	2301-000200	C-FILM,PEF;2.2nF,5%,200V,TP,11.0x6.0x9.0	
....4 C480	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
....4 C483	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
....4 C484	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
....4 C487	2305-000178	C-FILM,MPEF;10nF,5%,100V,TP,-,5mm	
....4 C488	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 C489	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
....4 C490	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C492	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
....4 C857	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
....4 C866	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
....4 C869	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
....4 C873	2401-001998	C-AL;1000uF,20%,25V,GP,TP,10x20,5mm	
....4 CN401	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5MM,STRAIGH	
....4 CN403	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,STRAIGH	
....4 CR401S	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
....4 CR402S	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,	
....4 CR403S	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,	
....4 CS804	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 CS805	2401-001101	C-AL;330uF,20%,16V,GP,TP,8x11.5,5	
....4 CS807	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 CS808	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 CS809	2201-000556	C-CERAMIC,DISC;0.47nF,10%,500V,Y5P,TP,5.	
....4 CS812	2201-002076	C-CERAMIC,DISC;0.068nF,5%,1kV,SL,TP,8x4m	
....4 CS813	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
....4 CS814	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
....4 CZ101	2401-001428	C-AL;470uF,20%,50V,GP,TP,10x20,5	
....4 CZ102	2401-001428	C-AL;470uF,20%,50V,GP,TP,10x20,5	
....4 CZ108	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
....4 CZ109	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
....4 CZ110	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
....4 CZ111	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
....4 CZ112	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
....4 CZ113	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
....4 CZ114	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
....4 CZ115	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
....4 CZ116	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
....4 CZ117	2201-000327	C-CERAMIC,DISC;2.2nF,10%,50V,Y5V,TP,6.5x	
....4 CZ118	2201-000327	C-CERAMIC,DISC;2.2nF,10%,50V,Y5V,TP,6.5x	
....4 CZ126	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
....4 CZ127	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
....4 CZ128	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
....4 CZ132	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
....4 CZ133	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
....4 CZ134	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
....4 CZ135	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
....4 CZ136	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
....4 CZ137	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
....4 CZ138	2201-000327	C-CERAMIC,DISC;2.2nF,10%,50V,Y5V,TP,6.5x	
....4 CZ139	2201-000327	C-CERAMIC,DISC;2.2nF,10%,50V,Y5V,TP,6.5x	
....4 CZ151	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
....4 CZ152	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
....4 CZ153	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
....4 CZ154	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
....4 CZ155	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
....4 CZ156	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
....4 D302	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D353	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D384	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 D385	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D433	0402-000537	DIODE-RECTIFIER;RH1A,600V,0.6A,DO-204AC	
....4 D434	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D435	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 D436	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	

Loc. No.	Code No.	Description ; Specification	Remark
....4 D440	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
....4 D441	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
....4 D442	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D443	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D444	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D445	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
....4 D451	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
....4 D453	0402-001286	DIODE-RECTIFIER;RP1H,2000V,.1A,-,TP	
....4 D472	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D474	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D477	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D478	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D479	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D480	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 D484	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 D501	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 DR401S	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DR402S	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DR404S	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
....4 DS805	0404-001056	DIODE-SCHOTTKY;RK16,60V,1.5A,DO-204AC,TP	
....4 DS807	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 DS809	0404-001056	DIODE-SCHOTTKY;RK16,60V,1.5A,DO-204AC,TP	
....4 DZ301	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
....4 DZ304	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
....4 DZ305	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
....4 DZ306	0403-001330	DIODE-ZENER;MTZJ30A,26.99-28.39V,500mW,D	
....4 DZ307	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
....4 DZ386	0403-001316	DIODE-ZENER;MTZJ3.0A,2.85-3.07V,500mW,DO	
....4 DZ395	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
....4 DZ400	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
....4 DZ413	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
....4 DZ473	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
....4 DZ474	0403-000734	DIODE-ZENER;TZP15B,15V,14.7-16.5V,1W,DO-	
....4 DZ481	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
....4 DZ482S	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
....4 DZ483	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
....4 DZ801	0406-001106	DIODE-TVS;P6KE300A,285/-/315V,600W,DO-20	
....4 DZ802	0406-001106	DIODE-TVS;P6KE300A,285/-/315V,600W,DO-20	
....4 DZ803	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4 DZ804	0403-000716	DIODE-ZENER;MTZJ4.7B,4.7V,4.55-4.8V,500m	
....4 DZ805	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
....4 DZ806	0403-000691	DIODE-ZENER;R2K,170V,170-200V,-,-,TP	
....4 DZ807	0403-000734	DIODE-ZENER;TZP15B,15V,14.7-16.5V,1W,DO-	
....4 ICR01S	1203-001217	IC-POSI.ADJUST REG.;431,TO-92,3P,4.58MIL	
....4 L341	2701-000116	INDUCTOR-AXIAL;10uH,10%,4.2x9.8mm	
....4 L480	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L481	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L483	2901-000299	FILTER-EMI ON BOARD;-,6A,UL/CSA,-,9x7.5,	
....4 L492	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L493	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L495	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L499	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 LS801	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 LS802	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 LZ107	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ108	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ109	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ110	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ111	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ112	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 Q301	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q350	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q351	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q352	0501-000366	TR-SMALL SIGNAL;KSC2330-Y,NPN,1W,TO-92L,	
....4 Q381	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q382	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q401	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q402	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q421	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q422	0505-000156	FET-SILICON;IRF620,N,200V,5A,0.8ohm,50W,	
....4 Q432	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q435	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
....4 Q436	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q451	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q461	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q471	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q472	0505-000156	FET-SILICON;IRF620,N,200V,5A,0.8ohm,50W,	

Loc. No.	Code No.	Description ; Specification	Remark
....4 Q474	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q481	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q482	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 QR401S	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 QS801	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
....4 QS802	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 R301	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
....4 R302	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
....4 R303	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R305	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R306	2003-002129	R-METAL OXIDE(S);3.9ohm,5%,2W,AF,TP,3.9x	
....4 R307	2003-001036	R-METAL OXIDE(S);3.3ohm,5%,2W,AF,TP,3.9x	
....4 R308	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
....4 R310	2003-002009	R-METAL OXIDE(S);390ohm,5%,2W,AF,TP,3.9x	
....4 R312	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R313	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R314	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R332	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4 R333	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4 R334	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4 R350	2001-000878	R-CARBON;6.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R351	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R352	2001-000837	R-CARBON;51KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R353	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R354	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R355	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R356	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R357	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R358	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R359	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R360	2001-000723	R-CARBON;4.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R361	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
....4 R362	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
....4 R363	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
....4 R364	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
....4 R365	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
....4 R366	2002-001006	R-COMPOSITION;4.7Kohm,5%,1/2W,AA,TP,3.7x	
....4 R384	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R385	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R386	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R387	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R388	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R389	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R397	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R405	2009-001109	R-TEMPERATURE;240ohm,5%,1/4W,AA,TP,2.3x6	
....4 R406	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R407	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
....4 R408	2004-001402	R-METAL(S);6.8Kohm,1%,1/2W,AA,TP,2.4x6.4	
....4 R409	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R410	2001-000052	R-CARBON(S);3.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R411	2008-001113	R-FUSIBLE(S);0.22ohm,10%,2W,AG,TP,3.9x12	
....4 R412	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R413	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R414	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R415	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R416	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R417	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R418	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R419	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R420	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R421	2003-002159	R-METAL OXIDE;150OHM,5%,1W,AG,TP,4.3X12M	
....4 R422	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R423	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R424	2008-000299	R-FUSIBLE(S);47ohm,5%,2W,AF,TP,3.9x10mm	
....4 R425	2003-000417	R-METAL OXIDE(S);1.2Kohm,5%,3W,AA,TP,6x1	
....4 R426	2003-002153	R-METAL OXIDE;4.7OHM,5%,2W,AG,TP,6X16MM	
....4 R427	2003-002152	R-METAL OXIDE;1OHM,5%,2W,AG,TP,6X16MM	
....4 R427A	2003-002152	R-METAL OXIDE;1OHM,5%,2W,AG,TP,6X16MM	
....4 R428	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R428A	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R429	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
....4 R430	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
....4 R432	2001-001144	R-CARBON(S);4.7KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R433	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R434	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R435	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4 R436	2001-001182	R-CARBON(S);7.5KOHM,5%,1/2W,AA,TP,2.4X6.	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R437	2008-001087	R-FUSIBLE(S);1.8ohm,5%,2W,AG,TP,3.9x12mm	
....4 R438	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R439	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R440	2008-000282	R-FUSIBLE;0.47ohm,5%,1W,AA,TP,3.9x12mm	
....4 R441	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R442	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R442A	2008-000254	R-FUSIBLE(S);0.68ohm,5%,2W,AF,TP,3.9x10m	
....4 R443	2003-002156	R-METAL OXIDE;560OHM,5%,2W,AG,TP,6X16MM	
....4 R443A	2003-002156	R-METAL OXIDE;560OHM,5%,2W,AG,TP,6X16MM	
....4 R444	2003-000995	R-METAL OXIDE(S);3.3Kohm,5%,2W,AF,TP,3.9	
....4 R445	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R446	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R447	2008-000254	R-FUSIBLE(S);0.68ohm,5%,2W,AF,TP,3.9x10m	
....4 R448	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R449	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R454	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R455	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R456	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R458	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R459	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R460	2003-002044	R-METAL OXIDE(S);100ohm,5%,1W,AF,TP,2.5x	
....4 R461	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R462	2008-001079	R-FUSIBLE;4.7OHM,5%,2W,AF,TP,3.9X10MM	
....4 R463	2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP,3.9x	
....4 R464	2003-002158	R-METAL OXIDE;0.68OHM,5%,1W,AG,TP,4.3X12	
....4 R465	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R466	2004-001386	R-METAL(S);16.9Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R467	2004-001986	R-METAL(S);35.7Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R468	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R469	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R470	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R471	2004-002011	R-METAL(S);110Kohm,1%,1/2W,AA,TP,2.4x6.4	
....4 R472	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
....4 R473	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
....4 R474	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R475	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R482	2001-001031	R-CARBON;91KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R483	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R484	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R485	2008-001137	R-FUSIBLE(S);3.3ohm,5%,1W,AF,TP,3.9x10mm	
....4 R486	2008-001018	R-FUSIBLE(S);0.47ohm,10%,2W,AF,TP,3.9x10	
....4 R487	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R488	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R489	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R490	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R491	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R492	2001-000508	R-CARBON;220KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R494	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R495	2001-000262	R-CARBON;1.8MOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R501	2004-001376	R-METAL(S);11Kohm,1%,1/2W,AA,TP,2.4x6.4m	
....4 R502	2004-001369	R-METAL(S);1.2Kohm,1%,1/2W,AA,TP,2.4x6.4	
....4 R856	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R857	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RF801S	2008-000282	R-FUSIBLE;0.47ohm,5%,1W,AA,TP,3.9x12mm	
....4 RFS802	2008-000294	R-FUSIBLE(S);33ohm,5%,2W,AF,TP,3.9x10mm	
....4 RFZ19	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ20	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ21	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ22	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ50	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ51	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ52	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ53	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RR401S	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 RR402S	2103-001086	VR-SEMI;100KOHM,25%,0.3W,TOP	
....4 RR403S	2004-004001	R-METAL(S);180Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 RR404S	2004-004046	R-METAL(S);430Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 RR405S	2004-004046	R-METAL(S);430Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 RR406S	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 RR407S	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RR408S	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RR409S	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
....4 RR410S	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RR471S	2103-001024	VR-SEMI;50Kohm,25%,0.3W,TOP	
....4 RS801	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS803	2001-001159	R-CARBON(S);510OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RS804	2001-001182	R-CARBON(S);7.5KOHM,5%,1/2W,AA,TP,2.4X6.	

Loc. No.	Code No.	Description ; Specification	Remark
....4 RS805	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4 RS806	2001-001159	R-CARBON(S);510OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RS807	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RS808	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RS809	2001-001099	R-CARBON(S);2.7KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS810	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS811	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RZ104	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ105	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ106	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ107	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ108	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ109	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ110	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ111	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ112	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ113	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RZ114	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ115	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RZ116	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ117	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RZ118	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ123	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ124	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ125	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ126	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ127	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ128	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ129	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ129A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ130	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ130A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ131	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ131A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ132	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ132A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ133	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ134	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ135	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ136	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RZ137	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ138	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RZ139	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ140	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RZ141	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ142	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ143	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ144	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ145	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ146	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ147	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ148	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ148A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ149	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ149A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 VP811S	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
...3	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
..2	AA95-00706C	ASSY-PCB,CONV MDL;,PCL545R,P54A	
...3 C163	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
...3 CN103	3711-001094	CONNECTOR-HEADER;BOX,7P,1R,2.5mm,ANGLE,-	
...3 CN201	3703-001124	CONNECTOR-DIN;32P,2R,MALE,ANGLE,AUF	
...3 IC113	1203-000641	IC-RESET;7442,TO-92,3P,-,PLASTIC,-0.3/7	
...3	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
...3	AA99-20087Z	ASSY-PCB SUB,AUTO; AA95-00706C ,V	S.N.A
....4 C101	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.	
....4 C102	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.	
....4 C103	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.	
....4 C104	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C105	2203-000851	C-CERAMIC,CHIP;0.039nF,5%,50V,NP0,TP,160	
....4 C106	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C107	2203-000715	C-CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,1608	
....4 C108	2402-000170	C-AL,SMD;1uF,20%,50V,GP,TP,4.3x4.3x5.4,	
....4 C109	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C110	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 C111	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C112	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C113	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
....4 C114	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C115	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C116	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C117	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C118	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C119	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C121	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C122	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C123	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C124	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C125	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C126	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C127	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C128	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C129	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C130	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C131	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C132	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C133	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
....4 C134	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C135	2203-000715	C-CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,1608	
....4 C136	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C137	2203-000715	C-CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,1608	
....4 C138	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C139	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C140	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
....4 C141	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C142	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
....4 C143	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C144	2203-000715	C-CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,1608	
....4 C145	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C146	2203-000715	C-CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,1608	
....4 C147	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C148	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
....4 C149	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C150	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C151	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C152	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
....4 C153	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C154	2203-000715	C-CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,1608	
....4 C155	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C156	2203-000715	C-CERAMIC,CHIP;3.3nF,10%,50V,X7R,TP,1608	
....4 C157	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C158	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
....4 C159	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C160	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C161	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.	
....4 C162	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.	
....4 C164	2402-000173	C-AL,SMD;4.7uF,20%,35V,GP,TP,4.3x4.3x5.	
....4 C165	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C166	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C167	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
....4 C168	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C169	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C170	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C172	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.	
....4 C173	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.	
....4 C174	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.	
....4 C201	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C202	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C203	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C204	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C205	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C206	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
....4 C301	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.	
....4 D101	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
....4 D102	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
....4 DZ101	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ102	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ105	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ106	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ107	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ108	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ109	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ110	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	

Loc. No.	Code No.	Description ; Specification	Remark
....4 DZ111	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ112	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ113	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ114	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ115	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ116	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ201	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ202	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ203	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ204	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ205	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 EF101	2901-000229	FILTER-EMI SMD;50V,0.3A,-,22000pF,4.5x3.	
....4 EF102	2901-000229	FILTER-EMI SMD;50V,0.3A,-,22000pF,4.5x3.	
....4 EF105	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF106	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF107	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF108	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF109	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF110	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF111	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF112	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF113	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF114	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF115	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF116	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF201	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF202	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF203	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF204	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 EF205	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
....4 IC101	AA13-00071A	IC-ASIC;-,SDC91,QFP,208P,CONV CONTROLL	
....4 IC102	0801-001043	IC-CMOS LOGIC;74HC4046,PHASE-LOCKED-LOOP	
....4 IC103	AA09-00032A	IC-MCU;TSC87251G2D-OTP,TSC87251G2D-OT	
....4 IC104	1103-001167	IC-EEPROM;28C64,8KX8BIT,TSOP,28P,-,120NS	
....4 IC105	1201-001520	IC-VIDEO AMP;2210,SOP,8P,150MIL,DUAL,7dB	
....4 IC106	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
....4 IC107	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
....4 IC108	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
....4 IC109	0801-001156	IC-CMOS LOGIC;74HC4066,BILATERAL SWITCH,	
....4 IC110	0801-001156	IC-CMOS LOGIC;74HC4066,BILATERAL SWITCH,	
....4 IC111	1001-000105	IC-ANALOG SWITCH;CD4066BM,BILATERAL CMOS	
....4 IC112	1001-000105	IC-ANALOG SWITCH;CD4066BM,BILATERAL CMOS	
....4 IC201	1203-001502	IC-POSI.FIXED REG.;431,SOT-23,3P,-,PLAST	
....4 PCB	AA41-00188F	PCB-CONVERGENCE MODULE;SVP-43J5M,FR-4,2L	
....4 Q101	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
....4 Q102	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
....4 Q103	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
....4 Q104	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
....4 Q107	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
....4 Q109	0505-000257	FET-SILICON;2SK217,N,-,20mA,-,150mW,SOT-	
....4 Q110	0505-000257	FET-SILICON;2SK217,N,-,20mA,-,150mW,SOT-	
....4 Q111	0505-000257	FET-SILICON;2SK217,N,-,20mA,-,150mW,SOT-	
....4 Q112	0505-000257	FET-SILICON;2SK217,N,-,20mA,-,150mW,SOT-	
....4 Q113	0505-000257	FET-SILICON;2SK217,N,-,20mA,-,150mW,SOT-	
....4 Q114	0505-000257	FET-SILICON;2SK217,N,-,20mA,-,150mW,SOT-	
....4 R101	2007-000882	R-CHIP;4.7ohm,5%,1/16W,DA,TP,1608	
....4 R102	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
....4 R103	2007-000882	R-CHIP;4.7ohm,5%,1/16W,DA,TP,1608	
....4 R104	2007-000882	R-CHIP;4.7ohm,5%,1/16W,DA,TP,1608	
....4 R105	2007-000416	R-CHIP;15ohm,5%,1/16W,DA,TP,1608	
....4 R106	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
....4 R107	2007-000102	R-CHIP;100Kohm,5%,1/16W,DA,TP,1608	
....4 R108	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R109	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
....4 R110	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
....4 R111	2007-000381	R-CHIP;13Kohm,5%,1/16W,DA,TP,1608	
....4 R112	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R113	2007-000099	R-CHIP;62Kohm,5%,1/16W,DA,TP,1608	
....4 R114	2007-000309	R-CHIP;10ohm,5%,1/16W,DA,TP,1608	
....4 R116	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R117	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R118	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R119	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R120	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R121	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
....4 R122	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R124	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R125	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
....4 R126	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
....4 R127	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
....4 R128	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R129	2007-000043	R-CHIP;1Kohm,1%,1/16W,DA,TP,1608	
....4 R130	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
....4 R131	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
....4 R132	2007-000043	R-CHIP;1Kohm,1%,1/16W,DA,TP,1608	
....4 R133	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
....4 R134	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
....4 R135	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R136	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R137	2007-000043	R-CHIP;1Kohm,1%,1/16W,DA,TP,1608	
....4 R138	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
....4 R139	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
....4 R140	2007-000043	R-CHIP;1Kohm,1%,1/16W,DA,TP,1608	
....4 R141	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
....4 R142	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
....4 R143	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R144	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R145	2007-000043	R-CHIP;1Kohm,1%,1/16W,DA,TP,1608	
....4 R146	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
....4 R147	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
....4 R148	2007-000043	R-CHIP;1Kohm,1%,1/16W,DA,TP,1608	
....4 R149	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
....4 R150	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
....4 R151	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R152	2007-000102	R-CHIP;100Kohm,5%,1/16W,DA,TP,1608	
....4 R153	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R154	2007-000134	R-CHIP;33Kohm,5%,1/16W,DA,TP,1608	
....4 R155	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 R156	2007-001056	R-CHIP;6.2Kohm,5%,1/16W,DA,TP,1608	
....4 R157	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
....4 R158	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R159	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R160	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R161	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R162	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R163	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R164	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R165	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R167	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R175	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 R176	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R178	2007-000729	R-CHIP;300ohm,5%,1/16W,DA,TP,1608	
....4 R179	2007-000729	R-CHIP;300ohm,5%,1/16W,DA,TP,1608	
....4 R180	2007-000729	R-CHIP;300ohm,5%,1/16W,DA,TP,1608	
....4 R181	2007-000729	R-CHIP;300ohm,5%,1/16W,DA,TP,1608	
....4 R182	2007-000729	R-CHIP;300ohm,5%,1/16W,DA,TP,1608	
....4 R183	2007-000729	R-CHIP;300ohm,5%,1/16W,DA,TP,1608	
....4 R192	2007-000309	R-CHIP;10ohm,5%,1/16W,DA,TP,1608	
....4 R193	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R194	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R201	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
....4 R203	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
....4 R204	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
....4 R205	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
....4 R206	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
....4 R207	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
....4 R208	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
....4 R301	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
....4 R302	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
....4 R303	2007-000093	R-CHIP;20Kohm,5%,1/16W,DA,TP,1608	
....4 R304	2007-000093	R-CHIP;20Kohm,5%,1/16W,DA,TP,1608	
....4 R305	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R306	2007-000704	R-CHIP;3.6Kohm,5%,1/16W,DA,TP,1608	
....4 R307	2007-000691	R-CHIP;3.3Mohm,5%,1/16W,DA,TP,1608	
....4 R308	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 X101	2801-003860	CRYSTAL-SMD;24MHz,30ppm,28-ABV,20pF,50oh	
..2	AA95-00707A	ASSY-PCB,CAPTION;,PCL545R,P54A	
...3 BK01	AA61-10068A	BRACKET-PCB;M2160,SPTE,T0.3,-,-,-,-	
...3 CNC01	3711-002709	CONNECTOR-HEADER;NOWALL,12P,1R,2.5MM,ANG	
...3 CNC02	3711-002708	CONNECTOR-HEADER;NOWALL,10P,1R,2.5mm,ANG	
...3 ICC01	1204-001718	IC-DECODER;Z86129,DIP,18P,300MIL,PLASTIC	
...3 ICC02	1001-001083	IC-VIDEO SWITCH;NJM2248D,-,DIP,8P,300MIL	
...3 ICC03	1001-001083	IC-VIDEO SWITCH;NJM2248D,-,DIP,8P,300MIL	
...3 PCB	AA41-00337A	PCB-CAPTION;PCL545R,FR-1,1L,A,1.6T,245X2	

Loc. No.	Code No.	Description ; Specification	Remark
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
...3	AA99-20080H	ASSY-PCB SUB,AUTO; AA95-00707A ,V	S.N.A
....4 CC01	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
....4 CC02	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 CC03	2201-000600	C-CERAMIC,DISC;0.56nF,10%,50V,Y5P,TP,5x3	
....4 CC04	2401-000223	C-AL;100nF,20%,50V,LL,TP,5x11mm,5mm	
....4 CC05	2301-000310	C-FILM,PEF;68nF,5%,50V,TP,8.0X8.5X4.0X5,	
....4 CC06	2301-000301	C-FILM,PEF;6.8nF,5%,50V,TP,6.5X5.5X3.0X5	
....4 CC07	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
....4 CC08	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 CC09	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 CC10	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 CC11	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
....4 CC12	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 CC13	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
....4 CC14	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 CC15	2201-000600	C-CERAMIC,DISC;0.56nF,10%,50V,Y5P,TP,5x3	
....4 CC16	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 CC19	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 DC01	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DC02	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DC03	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 LC01	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
....4 QC01	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 QC02	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 RC01	2004-000433	R-METAL;1Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
....4 RC02	2004-000433	R-METAL;1Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
....4 RC03	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RC04	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RC05	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RC06	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RC07	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RC08	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RC09	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RC10	2004-000433	R-METAL;1Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
....4 RC11	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RC12	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RC13	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RC14	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RC15	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RC16	2004-000218	R-METAL;10Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
....4 RC17	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RC18	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RC19	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RC20	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RC21	2001-000628	R-CARBON;300OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RC22	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RC23	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 RC24	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RC25	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
....4 RC30	2001-000708	R-CARBON;39OHM,5%,1/8W,AA,TP,1.8X3.2MM	
..2	AA95-00709A	ASSY-PCB,MICOM;,PCL545R,P54A	
...3 CN901	3703-001175	CONNECTOR-DIN;64P,2R,MALE,ANGLE,AU	
...3 IC901	AA09-00101A	IC MICOM;Z9037116PSC-OTP,SVP43J5M,52P,5	
...3 IC902	1103-001213	IC-EEPROM;M24C16-WBN6,2048x8Bit,SDIP,8P,	
...3 L903	2701-001032	INDUCTOR-AXIAL;100uH,10%,5x14mm	
...3 X901	2801-003224	CRYSTAL-UNIT;32.768KHZ,20PPM,28-AAY,12.5	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
...3	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	
...3	AA99-20080P	ASSY-PCB SUB,AUTO; AA95-00709A ,V	S.N.A
....4 C901	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
....4 C902	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C903	2203-000595	C-CERAMIC,CHIP;0.22nF,5%,50V,NP0,TP,2012	
....4 C904	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C905	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 C906	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C907	2301-000111	C-FILM,PEF;1.8nF,5%,50V,TP,6.5x3.0x5.5mm	
....4 C908	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
....4 C909	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
....4 C910	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
....4 C911	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
....4 C912	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C913	2201-000193	C-CERAMIC,DISC;0.01nF,0.25pF,50V,NP0,TP,	
....4 C914	2201-000578	C-CERAMIC,DISC;0.047nF,5%,50V,UJ,TP,5x3.	
....4 C915	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C916	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
....4 C917	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C918	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C919	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
....4 C920	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C921	2203-000595	C-CERAMIC,CHIP;0.22nF,5%,50V,NP0,TP,2012	
....4 C925	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C926	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
....4 C927	2201-000578	C-CERAMIC,DISC;0.047nF,5%,50V,UJ,TP,5x3.	
....4 C928	2201-000578	C-CERAMIC,DISC;0.047nF,5%,50V,UJ,TP,5x3.	
....4 D901	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
....4 D902	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
....4 D903	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
....4 D904	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
....4 D905	0401-000133	DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8	
....4 DZ903	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ904	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ905	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ911	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
....4 DZ912	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
....4 DZ913	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
....4 DZ916	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ917	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 DZ918	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
....4 F901	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 IC903	1203-001274	IC-VOL. DETECTOR;7545,TO-92,3P,-,PLASTIC	
....4 IC904	1203-000515	IC-VOL. DETECTOR;7042,TO-92,3P,177MIL,PL	
....4 L902	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L910	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L911	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L912	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L913	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 PCB	AA41-00338A	PCB-MICOM;PCL545R,FR-4,2L,A,1.6T,180X245	
....4 Q901	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q902	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q903	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q909	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q910	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q911	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 R901	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R902	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
....4 R903	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R904	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 R905	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R907	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R908	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R911	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 R912	2007-000076	R-CHIP;330ohm,5%,1/16W,DA,TP,1608	
....4 R913	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
....4 R914	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R915	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R916	2007-000081	R-CHIP;2.7Kohm,5%,1/16W,DA,TP,1608	
....4 R917	2007-000081	R-CHIP;2.7Kohm,5%,1/16W,DA,TP,1608	
....4 R918	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
....4 R919	2007-000458	R-CHIP;18Kohm,5%,1/16W,DA,TP,1608	
....4 R920	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
....4 R921	2007-000087	R-CHIP;6.8Kohm,5%,1/16W,DA,TP,1608	
....4 R922	2007-000087	R-CHIP;6.8Kohm,5%,1/16W,DA,TP,1608	
....4 R923	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R924	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R925	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
....4 R926	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
....4 R927	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
....4 R928	2007-000081	R-CHIP;2.7Kohm,5%,1/16W,DA,TP,1608	
....4 R929	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
....4 R930	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R931	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R932	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R934	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R935	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R936	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R937	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R945	2007-001093	R-CHIP;620ohm,5%,1/16W,DA,TP,1608	
....4 R946	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 R947	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 R948	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R949	2007-000082	R-CHIP;3.3Kohm,5%,1/16W,DA,TP,1608	
....4 R950	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R951	2007-000082	R-CHIP;3.3Kohm,5%,1/16W,DA,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R958	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R959	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R960	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
....4 R961	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R962	2007-000098	R-CHIP;56Kohm,5%,1/16W,DA,TP,1608	
....4 R963	2007-000082	R-CHIP;3.3Kohm,5%,1/16W,DA,TP,1608	
....4 R964	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R965	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R967	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R968	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R969	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R971	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
....4 R972	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
....4 R973	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
....4 R974	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R976	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4 R977	2007-000305	R-CHIP;10Mohm,5%,1/16W,DA,TP,1608	
....4 R978	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
....4 R981	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
....4 R982	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
....4 R983	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	

ASSY-PCB,V/M

1	*AA95-00714B	ASSY-PCB,V/M;DP,PCL545R,P54A	
..2 CNZ101	AA39-20055E	LEAD CONNECTOR-ASSY;,6P,YBNH025-06,67096	
..2 PCB	AA41-00344A	PCB-VM;PCL545R,FR-1,1L,A,1.6T,245X245	
..2 QZ101	AA96-50162F	ASSY-H/S;-,POWER,AA62-30013E,2SA1011,30	
...3	0502-000131	TR-POWER;2SA1011-D,PNP,1.2W,TO-220,-,60	
...3	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...3	AA62-30013E	HEAT-SINK,ES;-,A6063 EXTR,-,-,30(21) T02	
..2 QZ102	AA96-50162G	ASSY-H/S;-,AMP,AA62-30013E,2SC2344,30MM	
...3	0502-000153	TR-POWER;2SC2344-D,NPN,1.2W,TO-220,-,60	
...3	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
...3	AA62-30013E	HEAT-SINK,ES;-,A6063 EXTR,-,-,30(21) T02	
..2 RZ120	2008-001097	R-FUSIBLE(S);33OHM,5%,1/2W,AC,BK,2.5X6.5	
..2	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
..2	AA33-00008A	MAGNET CONVERGENCE;,JH92LTU-36A,7inchPRT,	
..2	AA99-20091T	ASSY-PCB SUB,AUTO; AA95-00714B ,V	S.N.A
...3 CNZ102	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,STRAIGH	
...3 CNZ103	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,STRAIGH	
...3 CNZ104	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,STRAIGH	
...3 CZ101	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
...3 CZ102	2401-001157	C-AL;33uF,20%,160V,GP,TP,12.5x20,5	
...3 CZ103	2201-000516	C-CERAMIC,DISC;4.7nF,+100-0%,500V,Y5U,TP	
...3 CZ104	2201-000193	C-CERAMIC,DISC;0.01nF,0.25pF,50V,NP0,TP,	
...3 CZ105	2201-000516	C-CERAMIC,DISC;4.7nF,+100-0%,500V,Y5U,TP	
...3 CZ106	2201-000193	C-CERAMIC,DISC;0.01nF,0.25pF,50V,NP0,TP,	
...3 CZ107	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11,5	
...3 CZ108	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
...3 CZ109	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
...3 CZ110	2201-000604	C-CERAMIC,DISC;0.056nF,+100-0%,500V,SL,T	
...3 CZ111	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
...3 CZ112	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
...3 DZ101	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3 DZ102	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 DZ103	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3 DZ104	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
...3 DZ105	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 DZ106	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 LZ101	2701-000002	INDUCTOR-AXIAL;100uH,10%,4.2x9.8mm	
...3 QZ103	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
...3 QZ104	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 QZ105	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 QZ106	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 RFZ101	2008-001086	R-FUSIBLE(S);3.3ohm,5%,2W,AG,TP,3.9x12mm	
...3 RZ101	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RZ102	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RZ103	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
...3 RZ104	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RZ105	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RZ106	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RZ107	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ108	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RZ109	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RZ110	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
...3 RZ111	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
...3 RZ112	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
...3 RZ113	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
...3 RZ114	2003-000532	R-METAL OXIDE(S);18ohm,5%,2W,AF,TP,4x12m	
...3 RZ115	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ116	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ117	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RZ118	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 RZ119	2001-000554	R-CARBON;270OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ121	2001-000666	R-CARBON;33OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 RZ122	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
...3 RZ123	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
..2	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
..2	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	

ASSY-PCB,TERMINAL

1	*AA95-00716A	ASSY-PCB,TERMINAL;,PCL545R,P54A	
..2 CNT01	3711-003630	CONNECTOR-HEADER;BOX,32P,2R,2.54mm,ANGLE	
..2 CNT02	3711-003630	CONNECTOR-HEADER;BOX,32P,2R,2.54mm,ANGLE	
..2 CNY01	3711-003601	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,ANGLE,	
..2 IC703	0904-001121	IC-I/O SUPPORT CHIP;8574,8BIT,DIP,16P,30	
..2 IC705	0801-000213	IC-CMOS LOGIC;4052,MULTIPLEXER,DIP,16P,3	
..2 ICD01	1204-001510	IC-SEPARATOR;EL4583CN,DIP,16P,-,PLASTIC,	
..2 ICD02	0801-000284	IC-CMOS LOGIC;4528,MULTIVIBRATOR,DIP,16P	
..2 ICD03	1204-001510	IC-SEPARATOR;EL4583CN,DIP,16P,-,PLASTIC,	
..2 JKV02	3722-001039	JACK-RCA;9P,3.4mm,SN,BLK,#16-22	
..2 JKV03	3722-001382	JACK-RCA;5P(9P),3.4MM,NI,R/W/G/BLUE,-	
..2 JKV04	3722-001382	JACK-RCA;5P(9P),3.4MM,NI,R/W/G/BLUE,-	
..2 JKV08	3722-000544	JACK-VHS;4P,11.5mm,AG,BLK,N	
..2 RD18	2001-000954	R-CARBON;750KOHM,5%,1/8W,AA,TP,1.8X3.2M	
..2	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	
..2	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
..2	AA99-20091R	ASSY-PCB SUB,AUTO; AA95-00716A ,V	S.N.A
...3 C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
...3 C702	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 C704	2203-000815	C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP,160	
...3 C705	2203-000815	C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP,160	
...3 C706	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C707	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C708	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C709	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C710	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C711	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C712	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 C713	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C714	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C715	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C716	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
...3 C717	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 C718	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C719	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C720	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C721	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C722	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C723	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 C724	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C727	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C730	2401-002299	C-AL;4.7uF,20%,50V,GP,TP,5x7,5	
...3 C731	2401-002299	C-AL;4.7uF,20%,50V,GP,TP,5x7,5	
...3 C732	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
...3 C733	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
...3 C734	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
...3 C735	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
...3 C736	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
...3 C737	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
...3 C738	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
...3 C739	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 C740	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
...3 C741	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 C760	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11,5	
...3 C761	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11,5	

Loc. No.	Code No.	Description ; Specification	Remark
...3 C762	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11,5	
...3 C763	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11,5	
...3 C764	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11,5	
...3 C765	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11,5	
...3 C766	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11,5	
...3 C767	2401-000667	C-AL;2.2uF,20%,50V,WT,TP,5x11,5	
...3 C768	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C769	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
...3 C780	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
...3 CD01	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
...3 CD02	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD03	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
...3 CD04	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD05	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
...3 CD06	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
...3 CD07	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD08	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD09	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
...3 CD10	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
...3 CD11	2401-000404	C-AL;10uF,20%,16V,BP,TP,5x11,5	
...3 CD12	2401-000404	C-AL;10uF,20%,16V,BP,TP,5x11,5	
...3 CD13	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD14	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD15	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
...3 CD16	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
...3 CD17	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
...3 CD18	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
...3 IC701	1001-001030	IC-VIDEO SWITCH;TDA6920X,-,SOP,28P,300MI	
...3 IC702	1001-001030	IC-VIDEO SWITCH;TDA6920X,-,SOP,28P,300MI	
...3 L701	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 L702	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 L711	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 L720	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 L721	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 L722	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 L723	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 L724	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 L725	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 L726	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 LD01	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 LD02	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 LD04	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 PCB	AA41-00343A	PCB-TERMINAL;PCL545R,FR-4,2L,A,1.6T,180X	
...3 Q701	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
...3 Q702	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
...3 Q703	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
...3 Q704	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
...3 Q705	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
...3 Q706	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
...3 Q707	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
...3 Q711	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
...3 Q712	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
...3 Q714	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
...3 QD01	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD02	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD03	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 QD04	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
...3 R701	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R702	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R703	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R704	2007-001157	R-CHIP;750ohm,5%,1/16W,DA,TP,1608	
...3 R705	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R706	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R707	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
...3 R708	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R709	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R710	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R712	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R713	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R714	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R715	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R716	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R717	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R718	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R719	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R720	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R721	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R722	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R723	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R724	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R725	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R726	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R727	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R728	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R729	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R734	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
...3 R735	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
...3 R740	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R741	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R742	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R743	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R744	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R745	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R748	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
...3 R749	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
...3 R750	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
...3 R751	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
...3 R752	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
...3 R753	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
...3 R754	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
...3 R755	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
...3 R756	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
...3 R757	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
...3 R758	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
...3 R759	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
...3 R760	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R761	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
...3 R762	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R763	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R764	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
...3 R765	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R766	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R767	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R768	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R769	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R774	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R775	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 R776	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R777	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R779	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 R780	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R788	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R791	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R792	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R793	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R794	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
...3 R795	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 R796	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 R797	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 R820	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 R821	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
...3 R829	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 R830	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 RD01	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
...3 RD02	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
...3 RD03	2007-000094	R-CHIP;22Kohm,5%,1/16W,DA,TP,1608	
...3 RD04	2007-000096	R-CHIP;30Kohm,5%,1/16W,DA,TP,1608	
...3 RD05	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RD06	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
...3 RD07	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
...3 RD08	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
...3 RD09	2007-000087	R-CHIP;6.8Kohm,5%,1/16W,DA,TP,1608	
...3 RD11	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
...3 RD12	2007-000913	R-CHIP;43Kohm,5%,1/16W,DA,TP,1608	
...3 RD13	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
...3 RD14	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
...3 RD15	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
...3 RD16	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
...3 RD17	2007-000090	R-CHIP;10Kohm,5%,1/16W,DA,TP,1608	
...3 RD19	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
...3 RD20	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
...3 RD21	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
...3 RN701	2011-000160	R-NETWORK;10Kohm,5%,1/8W,A,SIP,9P,TP	
...3 RP784	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
...3 RY701	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 RY702	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3 RY703	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	

ASSY-PCB,INTERFACE

1	*AA95-00968D	ASSY-PCB,INTERFACE;DP,PCL6215R,P54A	
..2 CN05	3711-003641	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
..2 CN09	3711-002646	CONNECTOR-HEADER;BOX,7P,1R,2.5mm,STRAIGH	
..2 CNW09	AA39-20029L	LEAD CONNECTOR ASSY;,7P,67096-007,S,800M	
..2 IC01	1201-000229	IC-OP AMP;324,DIP,14P,300MIL,QUAD,100V/m	
..2 IC02	1002-001256	IC-A/D CONVERTER;AD7823YN,8Bits,DIP,8P,2	
..2 IC03	1203-001006	IC-VOLTAGE REGULATOR;78R05,TO-220F,4P,-,	
..2 PCB	AA41-00397B	PCB-AUTO CONVERGENCE;PCL545R,FR-1,1L,B,1	
..2	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
..2	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
..2	AA99-20092W	ASSY-PCB SUB,AUTO; AA95-00968D ,V	S.N.A
...3 C01	2201-000949	C-CERAMIC,DISC;0.005nF,0.5pF,50V,UJ,TP,4	
...3 C02	2201-000949	C-CERAMIC,DISC;0.005nF,0.5pF,50V,UJ,TP,4	
...3 C03	2201-000949	C-CERAMIC,DISC;0.005nF,0.5pF,50V,UJ,TP,4	
...3 C04	2201-000949	C-CERAMIC,DISC;0.005nF,0.5pF,50V,UJ,TP,4	
...3 C05	2401-001495	C-AL;47uF,20%,16V,GP,TP,5x11,5	
...3 C06	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
...3 C07	2301-000289	C-FILM,PEF;5.6nF,5%,50V,TP,7x6x3,5	
...3 C08	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
...3 C10	2401-000914	C-AL;22uF,20%,16V,GP,TP,5x11,5	
...3 C11	2401-001495	C-AL;47uF,20%,16V,GP,TP,5x11,5	
...3 C12	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
...3 C13	2401-001495	C-AL;47uF,20%,16V,GP,TP,5x11,5	
...3 C14	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
...3 C15	2401-000287	C-AL;100uF,20%,16V,WT,TP,6.3x11,5	
...3 C16	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
...3 D05	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
...3 DZ01	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3 DZ02	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3 DZ03	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3 DZ04	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3 DZ05	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3 DZ06	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3 DZ07	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3 DZ08	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3 DZ09	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
...3 DZ10	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3 DZ11	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3 DZ12	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3 DZ13	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
...3 EF01	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 EF02	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 EF03	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 EF04	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 EF05	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 EF06	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 EF07	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 EF08	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 EF09	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 EF10	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 EF11	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 EF12	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
...3 L01	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
...3 Q05	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
...3 R13	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R14	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R15	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R16	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R17	2001-000302	R-CARBON;10OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R18	2001-000302	R-CARBON;10OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R19	2001-000645	R-CARBON;330KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R20	2001-000645	R-CARBON;330KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R21	2001-000645	R-CARBON;330KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R22	2001-000645	R-CARBON;330KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R23	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R24	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R25	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R26	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R27	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R30	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R31	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R32	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R33	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R34	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
...3 R35	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R36	2001-000210	R-CARBON;0ohm,5%,1/8W,AA,TP,1.8x3.2mm	
...3 R37	2001-000302	R-CARBON;10OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R38	2001-000302	R-CARBON;10OHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R40	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
...3 R41	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3 R42	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	

ASSY POWER CORD

1	*AA96-00156D	ASSY POWER CORD;-,EP2/YES(US),H/C 200MM,	
..2	AA61-20284A	HOLDER;-,P-CORD,PP,VO,BLK,KE-002	
..2	AA39-10007Y	POWER-CORD;-,EP2/YES,SPT-2 18AWGx2C,2.4m	
..2	3811-000401	WIRE-PVC CU;BCWA,300V,ROLL,17/0.16mm,#22	
..2	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	

ASSY SPEAKER

1	*AA96-00428A	ASSY SPEAKER;-,-,-,20W(3001-000153),8 OH	
..2	3001-000153	SPEAKER;20W,8ohm,93dB,1.3KHz	
..2	3001-000176	SPEAKER;30W,8ohm,93dB,65Hz	
..2	AA39-00042C	LEAD CONNECTOR-ASSY;,1.75UF,REC,REC,350M	
..2	AA98-00049B	ASSY-LEAD,CON;-,LEAD-CON,CORE,AA39-20505	
...3	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	

ASSY-SKD

1	*AA97-01190C	ASSY-SKD;,PCL6215R3C/XAA,P54A,CKD	S.N.A
..2 D/B	AA26-00101A	TRANS FBT;FWZ50A001E,-,-,-,-,-,-,-,-,-	
..2	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
..2	AA65-30104B	CLAMP-WIRE;NYLON 66,V2,BLK,W2 Z5,ALL MOD	
..2	AA26-30006F	TRANS-FLYBACK;-,FWZ-50A001C,55,30KV	
..2	AA39-20577A	LEAD CONNECTOR-ASSY;,6(3)P,YFH806-06,800	
..2	AA59-00171A	MODULE-FOCUS,PACK;SVP-5200,S300-P3,-,-,-	
..2	AA65-30018A	CLAMP-WIRE;NYLON-66,-,-,DATL-600,DONG-A,	

ASSY ACCESSORY

1	*AA97-01191A	ASSY ACCESSORY;,PCL545R3C/XAA,P54A,U.S.A	S.N.A
..2	AA69-30009C	BAG-SHEET;LDPE,T0.08,W150,L120,-,-,-	
..2	AA68-01413A	MANUAL USERS;PCL545R,ENG,W/P100(G),2(1),	
..2	AA68-01399A	MANUAL-GUIDE;,SEA,ENG,W/P 200(G),1,216X1	
..2	AA61-20126A	HOLDER-LEG;-,-,ABS,HB,BLK,-	
..2	AA39-00006A	CABLE-RCA;,3000MM	

REMOCON

1	*AA59-00176A	REMOCON;-,TM63,SHARK,51,L/GRAY,DO,-,-,	
..2	2802-000194	RESONATOR-CERAMIC;8MHz,1.0%,TP,8.5x4.5x5	
..2	AA09-00051A	IC-MCU;Z86L8808SSC-R501M,SZTM-822,ST,	

7-4 HCL552WX/XAA(HCL552WX/XAA and PCL545RX/XAA Dissimilar parts)

Loc. No.	Code No.	Description ; Specification	Remark

ASSY CABINET

	*AA90-00119G	ASSY CABINET;552W,HCL552WX/XAA	
	0203-000367	TAPE-CELLULOSE;#430,-,W19,L25,CLR	
	0203-001096	TAPE-CELLULOSE;#301,T0.06,W75,L400,WHT	
	0203-001269	TAPE-OPP MASKING;#301,T0.06,W75,L50000,NTR	
	0203-001279	TAPE-OPP MASKING;#232,T0.14,W15,L50000,YEL	
BM+CBT	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWRCH18	
CM+CF	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWRCH18	
CM+CW	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWRCH18	
DOOR+CF	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWRCH18	
FOCUS+BF	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SWRCH1	
APR+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
CBB+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
CBB+HC	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
CBB+TBA	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
CBT+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
CF+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
CM+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
CW+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
DOOR+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
HM+CM	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
LF+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
BCM+CW	6006-001094	SCREW-ASS'Y WOOD;W,HH,+,M7,L32,ZPC(YEL),SWRCH18A	
AC+BCM	AA60-10011A	SCREW-TAPTITE;SWRCH18A,M4,L12,HH,+,PC,,ZPC(BLK),SW	
BS+CF	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,,ZPC(BLK),S	
	AA61-11021A	BRACKET-MIRROR,T;-,SECC-1,T1.0,-,-,-,-	
	AA61-11022A	BRACKET-MIRROR,S;-,SECC-1,T1.0,-,-,-,-	
	AA61-11023A	BRACKET-SCREEN,T;-,SECC-1,T1.0,-,-,-,-	
	AA61-11024A	BRACKET-SCREEN,S;-,SECC-1,T1.0,-,-,-,-	
	AA63-10007C	BAND-PP;-,-,-,W18,-,CLEAR,1G	
	AA63-30225A	COVER-WOOD;-,SPT-555JHD,-,WOOD,-,-,-,-	
	AA63-70002A	SHEET;-,PE FOAM,T1.0,-,-,-,50G	
	AA64-00624A	CABINET-BACK,BOARD;552W,HARDBOAR,HIPS,V0,BLK,T3.0	
	AA64-31213B	CABINET-BACK,TOP;-,555J,-,HIPS,HB,BLK,-,-	
	AA64-31259A	CASE-MIRROR;-,SPT-555JHD,-,WOOD,-,-,-,-	
	AA64-31316B	CABINET-MIDDLE;-,HCH551W,DG-703P,HIPS,HB,BLK,-,-	
	AA64-60449B	INLAY-COVER;SP-434JMF,PS,T0.5,149.3X69.5,BLK,-,EXPORT	
	AA64-80052A	LEG-FRONT;-,SPT555JHD,DG703P,HIPS,HB,BLK,-	
	AA67-00053A	SUN SCRN,HC;,55W,H/C,A/S,PMMA,T=82%,T2.0,1251*712,	
	AA67-00124A	SCREEN-LENTIULAR;55W,T0.73,1249*710,P=0.52,TINT=10%	
	AA67-00124B	SCREEN-FRESNEL;55W,T2,1251*712	
	AA67-20028A	MIRROR-FRONT;55'W,GLASS,T=3.0,-,FSM,1074*79	
	AA68-00233A	LABEL-WARNING;A/P 90(G),PCJ533R,-,-,-,-	
AP3002	AA68-50509A	LABEL-BOX;A/P 90(G),ALL MODEL,-,WHT,L250	
	AA69-01088A	PALLET-SET;SVP-555JHD,PAPER,1450,750,130	
	AA69-01092A	PACKING CASE-IN;SVP-555JHD,H-3 AB,C3,1110,1816,YEL	
	AA69-10174A	PAD-TYPE;CB DW-2,YEL,1450,240,-,-,555JH	
	AA69-10175A	PAD-TYPE;CB DW-2,YEL,1500,567,-,-,555JH	
	AA69-20478A	CUSHION-SET;SPT-555JHD,PS,C0.02,-,-,-,-	
	AA69-30036A	BAG-PE;HDPE,T0.02,2000,1800,-,-,555J,	
	AA69-51216G	PACKING-CASE,OUT;552W,555W SEA NEW,H-3 AB,YEL	

ASSY CHASSIS PART

	*AA90-00121D	ASSY CHASSIS PART;P54A,HCL552W	
TBA+AV	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWRCH18	
TBA+HC	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SWRCH1	
	AA61-00051B	HOLDER-CHASSIS;-,PCJ533R,ABS,VO,GRAY,E-2	

ASSY TERMINAL BOARD

	*AA91-00594B	ASSY TERMINAL BOARD;,HIPS,VO,BLK,P54A,HCL552W	
	AA63-00045B	TERMINAL-BOARD,ANT;-,HIPS,-,PCJ533R,-	
	AA64-01709B	INLAY BACK;HCL552W,PS SHEET,BLK,P54A SEA	

ASSY-CABINET,WOOD

	*AA91-00692A	ASSY-CABINET,WOOD;,WOOD,P54A SDE8326R,HCL552W	
W-SPK	3001-000153	SPEAKER;20W,8ohm,93dB,1.3KHz	
W-SPK	3001-001116	SPEAKER;30W,8ohm,96dB,60Hz	
	3811-000446	WIRE-PVC CU;TCWA,600V,ROLL,17/0.16mm,#22,B	
	3811-000480	WIRE-PVC CU;BCWA,1KV,ROLL,17/0.16mm,#22,BL	
CAS+CW	6002-000214	SCREW-TAPPING;TH,+,1,M4.0,L16,ZPC(BLK),MSWR1	
	AA39-00042B	LEAD CONNECTOR-ASSY;,2.7UF,REC,REC,300MM,1007#22	
CABWOOD	AA60-10050X	SCREW-WOOD;-SWRCH18A,M3.5,L32,FH,+,,ZPC(YEL),PRJEC	
BF+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZPC(BLK),PRJT	
HCM+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZPC(BLK),PRJT	
HL+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZPC(BLK),PRJT	
SPK+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZPC(BLK),PRJT	
HW+CW	AA60-10051B	SCREW-WOOD;-,SWRCH18A,M3.5,L11,RH,+,-,ZPC(YEL),PRJT	
	AA61-00094F	HOLDER-RAIL;-,65W2DR,ABS,HB,BLK,L185	
	AA61-00097A	HOLDER-WIRE;-,-,NYLON 6/6,-,NTR,-	
	AA61-10247A	BRACKET-FOCUS;S46DS,SECC,T1.0,-,-,-,-	
	AA61-10387A	BRACKET-GRILLE;SVP-462J,SECC-1,T0.5,-,-,-,-	
	AA61-20136A	HOLDER-MASK,PIN;-,S4388,NYLON,-,BLK,#066	
	AA61-20298A	HOLDER-LEG;-,SPT555JHD,ABS,HB,BLK,-	
	AA61-40019A	BOSS-WOOD;-,ABS,-,-,-,GRY,V0	
	AA63-60126A	SPACER-FELT;PRJT43,52,FELT,-,-,-,BLK,T2,-,1160X15	
	AA63-60126B	SPACER-FELT;PRJT52,FELT,-,-,-,BLK,T2,-,850X15	
	AA64-02007A	CABINET-WOOD;HCL552W,P54A SDE8326R,WOOD	
	AA98-00049B	ASSY-LEAD,CON;-,LEAD-CON,CORE,AA39-20505P,-,-	

ASSY CABINET FRONT

	*AA91-10402K	ASSY CABINET FRONT;,HCL552W SEA,(SPK)DG703P+BK708P	
	0201-000281	ADHESIVE-RBR;D-5250,YEL,6000CPS+-500	
	0203-001166	TAPE-DOUBLE FACE;#4929,T0.64,W7.5,ROLL,BLK	
C/FRONT	0203-001290	TAPE-OPP MASKING;ANT 100C,T0.073,W30,L50M,TRP	
SPK+CF	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWRCH18	
	AA64-31315J	CABINET FRONT;HCL552W SEA,DG703P+BK708P,HIPS,HB,B	
	AA96-10153A	ASSY-SPEAKER;-,8ohm,15w,001052,20609A,CEN40	
C-SPK	3001-000151	SPEAKER;20W,8ohm,92dB,130Hz	
	AA39-20609A	LEAD CONNECTOR-ASSY;,2P,SMH250-02,REC,400MM,1007#	

ASSY CABINET BOT

	*AA91-10404E	ASSY CABINET BOT;,V0 BLK,JERSEY SP700N,HCL552W,652	
	AA60-40009A	PIN-MASK;-,-,-,-,NYLON66,-	
	AA61-20295A	HOLDER-PIN;-,SPT555JHD,ABS,HB,BLK,-	
	AA64-31212C	CABINET-FRONT,B;HCL552W,SP700N,HIPS,V0,BLK	

ASSY-DOOR

	*AA95-01155A	ASSY-DOOR;,HCL652W/552W,P54A	
	AA91-20071C	ASSY-DOOR,BODY;,P51A,E2,652W,552W	
KF+DB	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SWRCH1	
K-POWER	AA61-60116A	SPRING-CS;-,SUS304,-,D16,H4,N18,-,-,-	
K-OPEN	AA61-60117A	SPRING-CS;-,SUS304,-,D17,H5.5,N13,-,-,-	
	AA64-10756A	KNOB-POWER;-,-,-,ABS,HB,GRAY	
	AA64-10757A	KNOB-FAMILY;-,-,-,ABS,HB,GRAY	
	AA64-10758A	KNOB-OPEN;-,-,-,ABS,HB,GRAY	
	AA64-50248B	DOOR-BODY;-,HCJ655W,-,ABS,HB,GRAY,-,-	
	AA64-60434A	INLAY-CONTROL;-,-,PS,TO.3,BLA,-,-	
	AA91-20072B	ASSY-DOOR,SIDE;,SILVER,SVP-652WDR	

Loc. No.	Code No.	Description ; Specification	Remark
	0203-001085	TAPE-DOUBLE FACE;#4929,T0.64,W12,-,BLK	
	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SWRCH1	
	AA61-20297A	BASE-WING;-,-,ABS,HB,GRAY,-	
	AA61-40112A	HINGE-DOOR;-,HB,GRAY,-,-	
	AA61-60115A	SPRING-PLATE;PS,SK-5,-,-,-,-,T0.25,SPT555J,	
	AA64-50249A	DOOR-CASE;-,-,-,ABS,HB,GRAY,-,-	
	AA64-50253B	DOOR-AL;-,SVP-65W2DR,SILVER,AL,-,-,T1.0,-	
	0203-001085	TAPE-DOUBLE FACE;#4929,T0.64,W12,-,BLK	
	AA63-30221A	COVER-DOOR;-,-,-,ABS,HB,GRAY,-,-	
	AA63-30224B	COVER-AL;-,SVP-65W2DR,SILVER,AL,-,-,T1.0,-	

ASSY PCB MAIN(OPT)

	*AA94-03388F	ASSY PCB MAIN(OPT);HCL552WX/XAA,P54A,U.S.A	
R673A	2001-001142	R-CARBON(S);3KOHM,5%,1/2W,AA,TP,2.4X6.4MM	
CN602	3711-002644	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,STRAIGHT,SN	
J379	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
J382	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
J384	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
J385	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
	AA59-40003P	MODULE-FOCUS,PACK;-,F300,NTSC,43,64x62,BK	
EY01	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	
BAND	AA63-10002A	BAND-TIE;-,NYLON66 V2,-,-,L100,NTR,-	
WIRE	AA65-30018A	CLAMP-WIRE;NYLON-66,-,-,DATL-600,DONG-A,-	
	AA65-30104B	CLAMP-WIRE;NYLON 66,V2,BLK,W2 Z5,ALL MODE	
	AA65-30105B	CLAMP-WIRE;NYLON 66,V2,NTR,25MM,ALL MODEL	
US0174	AA68-00526A	LABEL-RATING;ART PAPER(90), MODEL,LAMINATING,57X52	
C904	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,8x3,5	

ASSY CRT-(R)

	*AA94-03599A	ASSY CRT-(R);P16LSG03RJA,+380MG,7,PCL6215R,BARE	
	AA67-10066A	LENS-ASSY;DELTA 37,-,-,CLEAR A/B,-,-,-	

ASSY CRT-(G)

	*AA94-03600A	ASSY CRT-(G);P16LSG03HKA,+380MG,7,PCL6215R,BARE	
	AA67-10066A	LENS-ASSY;DELTA 37,-,-,CLEAR A/B,-,-,-	

ASSY CRT-(B)

	*AA94-03601A	ASSY CRT-(B);P16LSG03BMB,+380MG,7,PCL6215R,BARE	
	AA67-10066A	LENS-ASSY;DELTA 37,-,-,CLEAR A/B,-,-,-	

ASSY ACCESSORY

	*AA94-03663A	ASSY ACCESSORY;HCL552WX/XAA,P54A,U.S.A,SEA	
	AA68-01509A	MANUAL USERS;HCL552W,ENG,W/P100(G),2(1),B5,P54A,68	

ASSY-PCB,CENTER SPK

*AA95-00307A		ASSY-PCB,CENTER SPK;-,PCJ552WX/XAA,P51A,-,-,USA	
	0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,-	
	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
	0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
	0204-001024	FLUX;DF-98TVS,-,20%,-	
RC601	2001-000052	R-CARBON(S);3.3KOHM,5%,1/2W,AA,TP,2.4X6.4MM	
RC612	2001-001067	R-CARBON(S);11KOHM,5%,1/2W,AA,TP,2.4X6.4MM	
RC613	2001-001067	R-CARBON(S);11KOHM,5%,1/2W,AA,TP,2.4X6.4MM	
RC602	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.4MM	
RC605	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.4MM	
RC606	2001-001103	R-CARBON(S);20KOHM,5%,1/2W,AA,TP,2.4X6.4MM	
RC611	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4MM	
RC608	2001-001131	R-CARBON(S);33KOHM,5%,1/2W,AA,TP,2.4X6.4MM	
RC607	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4MM	
RC603	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
RC604	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
CC607	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
CC605	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0mm,	
CC606	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0mm,	
CC601	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
CC603	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
CC604	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
CC602	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
CC608	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
CCN01	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGHT,SN	
CCN03	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGHT,SN	
CCN02	3711-002644	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,STRAIGHT,SN	
JC02	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
CCNW02	AA39-20020J	LEAD CONNECTOR-ASSY;,5P,67096-005,S,400,1007#26	
CCNW01	AA39-20608A	LEAD CONNECTOR-ASSY;,3(2)P,SMP250-02,67096-03,900M	
PCB	AA41-00120A	PCB-CENTER SPK;P51A,1L,FR-1,245X245X1.6T,9A,V-CUT,70X	
EY02	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	
EY03	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	
EY04	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	
	AA63-10002A	BAND-TIE;-,NYLON66 V2,-,-,L100,NTR,-	
	AA68-01082R	LABEL-MODULE;AA95-00307A,A/P90(G),-,-,-,-,-,-,CENTER SP	
ICC601	AA96-50381C	ASSY-H/S;-,-,AA62-30180B,TDA2052,-	
	1201-000348	IC-POWER AMP;2052,HEPTAWA,7P,-,SINGLE,-,PLA	
	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SWRCH1	
	AA62-30180B	HEAT-SINK,ES;-,A6063 EXTR.,2,WHT,70MM,-,ANO	

ASSY-PCB,PRE AMP

	*AA95-00357B	ASSY-PCB,PRE AMP;,HCL552WX/XAA,P54A	
	0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,-	
	0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
	0204-001024	FLUX;DF-98TVS,-,20%,-	
RR01	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
CR01	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
LR01	2701-000112	INDUCTOR-AXIAL;100uH,10%,3x7mm	
CN905	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGHT,SN	
CN905	AA39-20033K	LEAD CONNECTOR-ASSY;,3P,67096-003,S,800MM,2547#26	
PCB	AA41-10436A	PCB-PREAMP;SPT51A,1,FR-1,245x245x1.6T	
RMR01	AA59-60001Z	MODULE-REMOCON;-,ORC-638V1/SR-5CP2,38KHz,940n	
	AA60-10011A	SCREW-TAPTITE;-SWRCH18A,M4,L12,HH,PC,-,ZPC(BLK),SW	
	AA61-00724B	BRACKET-RMC;HCL552W,652W,SECC,T1.0	

ASSY-PCB,SUB

	*AA95-00705B	ASSY-PCB,SUB;,PCL545R,P54A	
R307	2003-001038	R-METAL OXIDE(S);4.7ohm,5%,2W,AF,TP,3.9x10mm	

ASS'Y-PCB,V/M

	*AA95-00714A	ASS'Y-PCB,V/M;-,PCL545R,P54A	
	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	

ASSY-PCB,TERMINAL

	*AA95-00715C	ASSY-PCB,TERMINAL;,HCL552W,P54A	
CNY02	AA39-20052D	LEAD CONNECTOR-ASSY;,4P,YBNH025-04,YSH025-04,700,1	

ASSY-DOOR

Loc. No.	Code No.	Description ; Specification	Remark
	*AA95-01155A	ASSY-DOOR;,HCL652W/552W,P54A	
	0205-000001	GREASE-LITHUM;EM-50L,TEMP(-45~150),D=0.84	
BM+MT	6001-000057	SCREW-MACHINE;RH,+,M3,L6,ZPC(BLK),SWRCH18A,F	
PC+DB	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SWRCH1	
	6003-001233	SCREW-TAPTITE;PWH,+,P,M3,L8,ZPC(BLK),SWCRH18A	
DB+BM	6006-000255	SCREW-ASS'Y MACH;WSP,PH,+,M3,L6,ZPC(WHT),SWRCH1	
DG+BM	6044-001028	RING-E;ID3,OD7,T0.6,BLK,SK5	
	AA61-00069A	BRACKET-MOTOR,ASSY;HCH551W,SECC-1+SUM 24L,-,-,-,N	
	AA61-20311A	HOLDER-SHAFT;-,-,POM,M90-44,NAT,P15xH5.5	
	AA61-20312A	HOLDER-CAP;-,-,POM,M90-44,NAT,-	
	AA61-80058A	DAMPER-GEAR,A;-,POM,-,-,WHT,-,-,-,-,-,-,-,-	
	AA61-80059A	DAMPER-GEAR,B;-,POM,-,-,WHT,-,-,-,-,-,-,-,-	
	AA61-80060A	DAMPER-GEAR,C;-,POM,-,-,WHT,-,-,-,-,-,-,-,-	
	AA61-80061A	DAMPER-GEAR,WARM;-,POM,-,-,WHT,-,-,-,-,-,-,-,-	
	AA63-00129A	SPACER-RUBBER,TOWER;HCH551W,EPDM,BLK,M3 NUT-	
	AA63-10002A	BAND-TIE;-,NYLON66 V2,-,-,L100,NTR,-	
	AA65-30105C	CLAMP-WIRE;ALL MODEL,NYLON 66,V2,NTR,5MM,-,-,-	
	AA68-01087B	LABEL-MODULE;AA95-00364A,A/P90(G),-,-,-,-,-,-,DOOR,-	
	AA91-20071C	ASSY-DOOR,BODY;-,-,P51A E2,652W,552W	
	AA91-20072B	ASSY-DOOR,SLIDE;-,-,SILVER,SVP-65W2DR	
	AA91-20073B	ASSY-DOOR,COVER;-,-,SILVER,SVP-65W2DR	
	AA95-01156A	ASSY-PCB,CONTROL A/V;,HCL552WX/XAA,P54A,USA	
	AA95-90029A	ASSY-PCB,DOOR SUB;-,SPT-555JHD,APT52A,-,-,MVT	
	0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,-	
	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
	0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
	0204-001024	FLUX;DF-98TVS,-,20%,-	
DY01	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-	
DY02	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
DZY01	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500mW	
QY02	0501-000303	TR-SMALL SIGNAL;KSA733,PNP,250mW,TO-92,TP,120-240	
QY01	0504-000123	TR-DIGITAL;KSR1010,NPN,300mW,10K,TO-92,TP	
ICY03	0904-001121	IC-I/O SUPPORT CHIP;8574,8BIT,DIP,16P,300MIL,100KH	
ICY04	0904-001121	IC-I/O SUPPORT CHIP;8574,8BIT,DIP,16P,300MIL,100KH	
ICY01	1003-001090	IC-MOTOR DRIVER;LB1643,SIP,10P,-,SINGLE,1.6A,S	
ICY02	1202-000103	IC-VOLTAGE COMP.;393,DIP,8P,300MIL,DUAL,36V,CMO	
RY36	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY37	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY43	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY44	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY04	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY07	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY23	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY09	2001-000347	R-CARBON;13KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY30	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY31	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY41	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY42	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY47	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY50	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY51	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY34	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY08	2001-000539	R-CARBON;24KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY10	2001-000539	R-CARBON;24KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY02	2001-000633	R-CARBON;30KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY24	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY35	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY45	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY48	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY01	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY49	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY32	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY33	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY11	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY12	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12mm	
RY22	2004-000218	R-METAL;10Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
RY21	2004-000253	R-METAL;11Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
CY01	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
CY03	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0mm,	
CY06	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0mm,	
CY04	2401-000444	C-AL;10uF,20%,25V,GP,TP,5x5mm,5mm	
CY05	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
CY02	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
LY01	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
SWY01	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
SWY02	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
SWY03	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
SWY04	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
SWY05	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
SWY06	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
SWY07	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
SWY08	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
CNY03	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGHT,SN	
CNY04	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGHT,SN	
CNY02	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGHT,SN	
JKY01	3722-000544	JACK-VHS;4P,11.5mm,AG,BLK,N	
JKY02	3722-001041	JACK-RCA;1P,3.4mm,#16-22,AU	
JKY04	3722-001042	JACK-RCA;1P,3.4mm,#16-22,AU	
JKY03	3722-001043	JACK-RCA;1P,3.4mm,#16-22,AU	
JY01	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY02	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY03	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY04	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY05	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY06	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY07	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY08	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY09	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY10	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY11	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY12	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY13	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY14	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY15	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY16	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY17	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY18	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY19	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY20	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY21	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY23	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY24	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
CNW902	AA39-00117A	LEAD CONNECTOR-ASSY;,11P,YBNH250-11,35155-1100,1000	
CNW204	AA39-20159G	LEAD CONNECTOR-ASSY;,12P,YBNH250-12,67096-012,1700	
PCB	AA41-00067C	PCB-CONTROL A/V;HCL552W,FR-1,1L,C,1.6T,3101X140,MC-H	
	AA63-10002A	BAND-TIE;-,NYLON66 V2,-,-,L100,NTR,-	
	AA68-01083V	LABEL-MODULE;AA95-00306A,A/P90(G),-,-,-,-,-,-,CONTROL,-	
	0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,-	
	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
	0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
	0204-001024	FLUX;DF-98TVS,-,20%,-	
QY03	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,TP,120-240	
QY04	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,TP,120-240	
DY03	0601-000266	LED;CYLINDRICAL,RED,2mm,650nm	
PY1	0604-000203	PHOTO-INTERRUPTER;TR,-,-,-,ST	
PY2	0604-000203	PHOTO-INTERRUPTER;TR,-,-,-,ST	
RY16	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY18	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY19	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY20	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY15	2001-000343	R-CARBON;130OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY17	2001-000343	R-CARBON;130OHM,5%,1/8W,AA,TP,1.8X3.2MM	
JY10	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY11	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
	AA31-10002A	MOTOR-DC;-,RF370C-15370,8V DC,-	
CNY02C	AA39-20052C	LEAD CONNECTOR-ASSY;,4P,YBNH025-04,YSH025-04,500,10	
CNY03C	AA39-20057B	LEAD CONNECTOR-ASSY;,3(2)P,YBNH025-03,67096-003,500,	
CNY04C	AA39-20594A	LEAD CONNECTOR-ASSY;,3P,67096-003,700MM,1007#28	
	AA41-11051A	PCB-DOOR SUB;APT52A,1L,FR-1,245x245x1.6T,A1	

7-5 HCL5515WX/XAA(HCL5515WX/XAA and PCL545RX/XAA Dissimilar parts)

Loc. No.	Code No.	Description ; Specification	Remark

ASSY CABINET

	*AA90-00119H	ASSY CABINET;552W,HCL5515WX/XAA	
	0203-000367	TAPE-CELLULOSE;#430,-,W19,L25,CLR	
	0203-001096	TAPE-CELLULOSE;#301,T0.06,W75,L400,WHT	
	0203-001269	TAPE-OPP MASKING;#301,T0.06,W75,L50000,NTR	
	0203-001279	TAPE-OPP MASKING;#232,T0.14,W15,L50000,YEL	
BM+CBT	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWRCH18	
CM+CF	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWRCH18	
CM+CW	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWRCH18	
DOOR+CF	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWRCH18	
FOCUS+BF	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SWRCH1	
APR+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
CBB+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
CBB+HC	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
CBB+TBA	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
CBT+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
CF+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
CM+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
CW+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
DOOR+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
HM+CM	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
LF+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
BCM+CW	6006-001094	SCREW-ASS'Y WOOD;WW,HH,+,M7,L32,ZPC(YEL),SWRCH1	
AC+BCM	AA60-10011A	SCREW-TAPTITE;,SWRCH18A,M4,L12,HH,+,PC,,ZPC(BLK),S	
BS+CF	AA60-10011A	SCREW-TAPTITE;,SWRCH18A,M4,L12,HH,+,PC,,ZPC(BLK),S	
	AA61-11021A	BRACKET-MIRROR,T;-,SECC-1,T1.0,-,-,-,-	
	AA61-11022A	BRACKET-MIRROR,S;-,SECC-1,T1.0,-,-,-,-	
	AA61-11023A	BRACKET-SCREEN,T;-,SECC-1,T1.0,-,-,-,-	
	AA61-11024A	BRACKET-SCREEN,S;-,SECC-1,T1.0,-,-,-,-	
	AA63-10007C	BAND-PP;-,-,-,W18,-,CLEAR,1G	
	AA63-30225A	COVER-WOOD;-,SPT-555JHD,-,WOOD,-,-,-,-	
	AA63-70002A	SHEET;-,PE FOAM,T1.0,-,-,-,50G	
	AA64-00624A	CABINET-BACK,BOARD;,552W,HARDBOARD,HIPS,V0,BLK,T	
	AA64-31213B	CABINET-BACK,TOP;-,555J,-,HIPS,HB,BLK,-,-	
	AA64-31259A	CASE-MIRROR;-,SPT-555JHD,-,WOOD,-,-,-,-	
	AA64-31316B	CABINET-MIDDLE;-,HCH551W,DG-703P,HIPS,HB,BLK,-,-	
	AA64-60449B	INLAY-COVER;SP-434JMF,PS,T0.5,149.3X69.5,BLK,-,EXPORT	
	AA64-80052A	LEG-FRONT;-,SPT555JHD,DG703P,HIPS,HB,BLK,-	
	AA67-00053A	SUN SCREEN,HC;,55W,H/C,A/S,PMMA,T=82%,T2.0,1251*7	
	AA67-00124A	SCREEN-LENTICULAR;55W,T0.73,1249*710,P=0.52,TINT=10	
	AA67-00124B	SCREEN-FRESNEL;55W,T2,1251*712	
	AA67-20028A	MIRROR-FRONT;55'W,GLASS,T=3.0,-,FSM,1074*79	
	AA68-00233A	LABEL-WARNING;A/P 90(G),PCJ533R,-,-,-,-	
AP3011	AA68-50509A	LABEL-BOX;A/P 90(G),ALL MODEL,-,WHT,L250	
	AA69-01088A	PALLET-SET;SVP-555JHD,PAPER,1450,750,130	
	AA69-01092A	PACKING CASE-IN;SVP-555JHD,H-3 AB,C3,1110,1816,YEL	
	AA69-10174A	PAD-TYPE;CB DW-2,YEL,1450,240,-,-,555JH	
	AA69-10175A	PAD-TYPE;CB DW-2,YEL,1500,567,-,-,555JH	
	AA69-20478A	CUSHION-SET;SPT-555JHD,PS,C0.02,-,-,-,-	
	AA69-30036A	BAG-PE;HDPE,T0.02,2000,1800,-,-,555J,	
	AA69-51216G	PACKING-CASE,OUT;552W,555W SEA NEW,H-3 AB,YEL	

ASSY CHASSIS PART

	*AA90-00121D\	ASSY CHASSIS PART;P54A,HCL552W	
TBA+AV	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWRCH18	
TBA+HC	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SWRCH1	
	AA61-00051B	HOLDER-CHASSIS;-,PCJ533R,ABS,VO,GRAY,E-2	

ASSY TERMINAL BOARD

	*AA91-00594C	ASSY TERMINAL BOARD;,HIPS,VO,BLK,P54A,HCL5515W	
	AA63-00045B	TERMINAL-BOARD,ANT;-,HIPS,-,PCJ533R,-	
	AA64-01709C	INLAY BACK;HCL5515W,PS SHEET,BLK,P54A B/B	

ASSY-CABINET,WOOD

	*AA91-00692A	ASSY-CABINET,WOOD;,WOOD,P54A SDE8326R,HCL552W	
W-SPK	3001-000153	SPEAKER;20W,8ohm,93dB,1.3KHz	
W-SPK	3001-001116	SPEAKER;30W,8ohm,96dB,60Hz	
	3811-000446	WIRE-PVC CU;TCWA,600V,ROLL,17/0.16mm,#22,B	
	3811-000480	WIRE-PVC CU;BCWA,1KV,ROLL,17/0.16mm,#22,BL	
CAS+CW	6002-000214	SCREW-TAPPING;TH,+,1,M4.0,L16,ZPC(BLK),MSWR1	
	AA39-00042B	LEAD CONNECTOR-ASSY;,2.7UF,REC,REC,300MM,1007#22	
CABWOOD	AA60-10050X	SCREW-WOOD;-,SWRCH18A,M3.5,L32,FH,+,-,-,ZPC(YEL),PR	
BF+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,,ZPC(BLK),PRJT	
HCM+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,,ZPC(BLK),PRJT	
HL+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,,ZPC(BLK),PRJT	
SPK+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,,ZPC(BLK),PRJT	
HW+CW	AA60-10051B	SCREW-WOOD;-,SWRCH18A,M3.5,L11,RH,+,,ZPC(YEL),PRJT	
	AA61-00094F	HOLDER-RAIL;-,65W2DR,ABS,HB,BLK,L185	
	AA61-00097A	HOLDER-WIRE;-,-,NYLON 6/6,-,NTR,-	
	AA61-10247A	BRACKET-FOCUS;S46DS,SECC,T1.0,-,-,-,-	
	AA61-10387A	BRACKET-GRILLE;SVP-462J,SECC-1,T0.5,-,-,-,-	
	AA61-20136A	HOLDER-MASK,PIN;-,S4388,NYLON,-,BLK,#066	
	AA61-20298A	HOLDER-LEG;-,SPT555JHD,ABS,HB,BLK,-	
	AA61-40019A	BOSS-WOOD;-,ABS,-,-,-,GRY,V0	
	AA63-60126A	SPACER-FELT;PRJT43,52,FELT,-,-,-,BLK,T2,-,1160X15	
	AA63-60126B	SPACER-FELT;PRJT52,FELT,-,-,-,BLK,T2,-,850X15	
	AA64-02007A	CABINET-WOOD;HCL552W,P54A SDE8326R,WOOD	
	AA98-00049B	ASSY-LEAD,CON;-,LEAD-CON,CORE,AA39-20505P,-,-	

ASSY CABINET FRONT

	*AA91-10402L	ASSY CABINET FRONT;,HCL5515W B/B,DG703P+BK708P	
	0201-000281	ADHESIVE-RBR;D-5250,YEL,6000CPS+-500	
	0203-001166	TAPE-DOUBLE FACE;#4929,T0.64,W7.5,ROLL,BLK	
C/FRONT	0203-001290	TAPE-OPP MASKING;ANT 100C,T0.073,W30,L50M,TRP	
	AA64-31315K	CABINET FRONT;HCL5515W B/B,DG703P+BK708P,HIPS,HB,	

ASSY-CABINET,BOT

	*AA91-10404A	ASSY-CABINET,BOT;,V0,BLK,SP-001GD,JERSEY,SPT555JHD	
	AA60-40009A	PIN-MASK;-,-,-,-,NYLON66,-	
	AA61-20295A	HOLDER-PIN;-,SPT555JHD,ABS,HB,BLK,-	
	AA64-31212A	CABINET-FRONT,B;-,551W,SP2000G,HIPS,V0,BLK,-,-	

ASSY-DOOR

	*AA95-01155A	ASSY-DOOR;,HCL652W/552W,P54A	
KF+DB	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SWRCH1	
K-POWER	AA61-60116A	SPRING-CS;-,SUS304,-,D16,H4,N18,-,-,-	
K-OPEN	AA61-60117A	SPRING-CS;-,SUS304,-,D17,H5.5,N13,-,-,-	
	AA64-10756A	KNOB-POWER;-,-,-,ABS,HB,GRAY	
	AA64-10757A	KNOB-FAMILY;-,-,-,ABS,HB,GRAY	
	AA64-10758A	KNOB-OPEN;-,-,-,ABS,HB,GRAY	
	AA64-50248B	DOOR-BODY;-,HCJ655W,-,ABS,HB,GRAY,-,-	
	AA64-60434A	INLAY-CONTROL;-,-,PS,T0.3,BLA,-,-	
	0203-001085	TAPE-DOUBLE FACE;#4929,T0.64,W12,-,BLK	
	AA61-20297A	BASE-WING;-,-,ABS,HB,GRAY,-	
	AA61-40112A	HINGE-DOOR;-,HB,GRAY,-,-	
	AA61-60115A	SPRING-PLATE;PS,SK-5,-,-,-,-,T0.25,SPT555J,	
	AA64-50249A	DOOR-CASE;-,-,-,ABS,HB,GRAY,-,-	
	AA64-50253B	DOOR-AL;-,SVP-65W2DR,SILVER,AL,-,-,T1.0,-	

Loc. No.	Code No.	Description ; Specification	Remark
	0203-001085	TAPE-DOUBLE FACE;#4929,T0.64,W12,-,BLK	
	AA63-30221A	COVER-DOOR;-,-,-,ABS,HB,GRAY,-,-	
	AA63-30224B	COVER-AL;-,SVP-65W2DR,SILVER,AL,-,-,T1.0,-	
	0205-000001	GREASE-LITHUM;EM-50L,TEMP(-45~150),D=0.84	
BM+MT	6001-000057	SCREW-MACHINE;RH,+,M3,L6,ZPC(BLK),SWRCH18A,F	
PC+DB	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SWRCH1	
	6003-001233	SCREW-TAPTITE;PWH,+,P,M3,L8,ZPC(BLK),SWCRH18A	
DB+BM	6006-000255	SCREW-ASS'Y MACH;WSP,PH,+,M3,L6,ZPC(WHT),SWRCH1	
DG+BM	6044-001028	RING-E;ID3,OD7,T0.6,BLK,SK5	
	AA61-00069A	BRACKET-MOTOR,ASSY;HCH551W,SECC-1+SUM 24L,,NTR,-	
	AA61-20311A	HOLDER-SHAFT;-,-,POM,M90-44,NAT,P15xH5.5	
	AA61-20312A	HOLDER-CAP;-,-,POM,M90-44,NAT,-	
	AA61-80058A	DAMPER-GEAR,A;-,POM,-,-,WHT,-,-,-,-,-,-,-	
	AA61-80059A	DAMPER-GEAR,B;-,POM,-,-,WHT,-,-,-,-,-,-,-	
	AA61-80060A	DAMPER-GEAR,C;-,POM,-,-,WHT,-,-,-,-,-,-,-	
	AA61-80061A	DAMPER-GEAR,WARM;-,POM,-,-,WHT,-,-,-,-,-,-,-	
	AA63-00129A	SPACER-RUBBER,TOWER;HCH551W,EPDM,BLK,M3 NUT-	
	AA63-10002A	BAND-TIE;-,NYLON66 V2,-,-,L100,NTR,-	
	AA65-30105C	CLAMP-WIRE;ALL MODEL,NYLON 66,V2,NTR,5MM,-,-,-	
	AA68-01087B	LABEL-MODULE;AA95-00364A,A/P90(G),-,-,-,-,-,-,DOOR,-	
	AA91-20071C	ASSY-DOOR,BODY;-,-,P51A E2,652W,552W	
	AA91-20072B	ASSY-DOOR,SLIDE;-,-,SILVER,SVP-65W2DR	
	AA91-20073B	ASSY-DOOR,COVER;-,-,SILVER,SVP-65W2DR	
	AA95-01156A	ASSY-PCB,CONTROL A/V;,HCL552WX/XAA,P54A,USA	
	AA95-90029A	ASSY-PCB,DOOR SUB;-,SPT-555JHD,APT52A,-,-,MVT	
	0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,-	
	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
	0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
	0204-001024	FLUX;DF-98TVS,-,20%,-	
DY01	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
DY02	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
DZY01	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500mW	
QY02	0501-000303	TR-SMALL SIGNAL;KSA733,PNP,250mW,TO-92,TP,120-240	
QY01	0504-000123	TR-DIGITAL;KSR1010,NPN,300mW,10K,TO-92,TP	
ICY03	0904-001121	IC-I/O SUPPORT CHIP;8574,8BIT,DIP,16P,300MIL,100KH	
ICY04	0904-001121	IC-I/O SUPPORT CHIP;8574,8BIT,DIP,16P,300MIL,100KH	
ICY01	1003-001090	IC-MOTOR DRIVER;LB1643,SIP,10P,-,SINGLE,1.6A,S	
ICY02	1202-000103	IC-VOLTAGE COMP.;393,DIP,8P,300MIL,DUAL,36V,CMO	
RY36	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY37	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY43	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY44	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY04	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY07	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY23	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY09	2001-000347	R-CARBON;13KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY30	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY31	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY41	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY42	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY47	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY50	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY51	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY34	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY08	2001-000539	R-CARBON;24KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY10	2001-000539	R-CARBON;24KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY02	2001-000633	R-CARBON;30KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY24	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY35	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY45	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY48	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY01	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY49	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY32	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY33	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY11	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY12	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12mm	
RY22	2004-000218	R-METAL;10Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
RY21	2004-000253	R-METAL;11Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
CY01	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
CY03	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0mm,	
CY06	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0mm,	
CY04	2401-000444	C-AL;10uF,20%,25V,GP,TP,5x5mm,5mm	
CY05	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
CY02	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
LY01	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	

Loc. No.	Code No.	Description ; Specification	Remark
SWY01	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
SWY02	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
SWY03	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
SWY04	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
SWY05	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
SWY06	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
SWY07	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
SWY08	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
CNY03	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGHT,SN	
CNY04	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGHT,SN	
CNY02	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGHT,SN	
JKY01	3722-000544	JACK-VHS;4P,11.5mm,AG,BLK,N	
JKY02	3722-001041	JACK-RCA;1P,3.4mm,#16-22,AU	
JKY04	3722-001042	JACK-RCA;1P,3.4mm,#16-22,AU	
JKY03	3722-001043	JACK-RCA;1P,3.4mm,#16-22,AU	
JY01	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY02	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY03	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY04	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY05	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY06	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY07	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY08	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY09	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY10	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY11	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY12	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY13	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY14	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY15	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY16	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY17	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY18	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY19	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY20	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY21	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY23	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY24	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
CNW902	AA39-00117A	LEAD CONNECTOR-ASSY;,11P,YBNH250-11,35155-1100,100	
CNW204	AA39-20159G	LEAD CONNECTOR-ASSY;,12P,YBNH250-12,67096-012,170	
PCB	AA41-00067C	PCB-CONTROL A/V;HCL552W,FR-1,1L,C,1.6T,330X245,P54A,	
	AA63-10002A	BAND-TIE;-,NYLON66 V2,-,-,L100,NTR,-	
	AA68-01083V	LABEL-MODULE;AA95-00306A,A/P90(G),-,-,-,-,-,-,CONTROL,-	

ASSY PCB MAIN(OPT)

	*AA94-03388H	HCL5515WX/XAA,P54A,U.S.A	
C904	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,8x3,5	
CN602	3711-002644	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,STRAIGHT,SN	
J379	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
J382	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
J384	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
J385	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
	AA59-40003P	MODULE-FOCUS,PACK;-,F300,NTSC,43,64x62,BK	
EY02	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	
BAND	AA63-10002A	BAND-TIE;-,NYLON66 V2,-,-,L100,NTR,-	
WIRE	AA65-30018A	CLAMP-WIRE;NYLON-66,-,-,DATL-600,DONG-A,-	
	AA65-30104B	CLAMP-WIRE;NYLON 66,V2,BLK,W2 Z5,ALL MODE	
	AA65-30105B	CLAMP-WIRE;NYLON 66,V2,NTR,25MM,ALL MODEL	
US0176	AA68-00526A	LABEL-RATING;ART PAPER(90),ALMODEL,LAMINATING,57	
	AA95-01103A	ASSY-PCB,SOUND;,PCL5415R,P54A	
	AA95-01132A	ASSY-PCB,PROSCAN;,PCL6215R,P54A	
ICD601	1204-001631	IC-SOUND PROCESSOR;MSP3450G,QFP,80P,,PLASTIC,9V,12	
QP701	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,TP,420	
ICP701	1204-001668	IC-PICTURE PROCESS;SDA9488X,SOP,28P,300MIL,PLATIC,3.	
IC01	1204-001789	IC-VIDEO PROCESS;VPC3230D-B3,QFP,80P,787MIL,PLASTIC,	
IC04	1205-001172	IC-INTERFACE;CIP3250A-B1,PLCC,68P,-,PLASTIC,5V,-,0to+65	
RP740	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
CR39	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
PR714	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
PR715	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
PR716	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
PR717	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
PR718	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
PR719	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
RP701	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
RP704	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
RP705	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
RP706	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
RP741	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
RP742	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
RP743	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
RP744	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
RP745	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
RP746	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
RP702	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
RP703	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
CR01	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
CP708	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,2012,	
CP710	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,2012,	
CP724	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,2012,	
CP726	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,2012,	
CP732	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,2012,	
CP733	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,2012,	
CP734	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,2012,	
CP750	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,2012,	
CP751	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,2012,	
CP752	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,2012,	
CP753	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,2012,	
CP754	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,2012,	
CP756	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,2012,	
CP728	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
CP729	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
CP701	2203-000274	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,2012	
CP702	2203-000274	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,2012	
CP704	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
CP748	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
CP749	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
CP747	2203-000683	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,2012	
CP745	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
CP746	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
CP757	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
CP703	2203-001223	C-CERAMIC,CHIP;0.82nF,10%,50V,X7R,TP,2012	
CC02	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
CP725	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
CP730	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
CP731	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
CP707	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
CP709	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
CP741	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
CP727	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
CP742	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
CP743	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
CP744	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
YL02	2703-000271	INDUCTOR-SMD;4.7uH,10%,2x1.25x1.25mm	
DL07	2703-000274	INDUCTOR-SMD;2.2uH,10%,1.25x2x0.85mm	
XP701	2801-004019	CRYSTAL-UNIT;20.25MHz,30ppm,28-AAM,13pF,20ohm,BK	
LP701	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,600MA,TP,-,.	
LP702	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,600MA,T	
LP703	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,600MA,T	
PL03	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,600MA,T	
PL04	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,600MA,T	
PL05	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,600MA,T	
	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SWRCH1	

ASSY CRT-(R)

*AA94-03599A	ASSY CRT-(R);P16LSG03RJA,+380MG,7,PCL6215R,BARE	
AA67-10066A	LENS-ASSY;DELTA 37,-,-,CLEAR A/B,-,-,-	

ASSY CRT-(G)

*AA94-03600A	ASSY CRT-(G);P16LSG03HKA,+380MG,7,PCL6215R,BARE	
AA67-10066A	LENS-ASSY;DELTA 37,-,-,CLEAR A/B,-,-,-	

ASSY CRT-(B)

*AA94-03601A	ASSY CRT-(B);P16LSG03BMB,+380MG,7,PCL6215R,BARE	
AA67-10066A	LENS-ASSY;DELTA 37,-,-,CLEAR A/B,-,-,-	

ASSY-PCB,PRE AMP

	*AA95-00357B	ASSY-PCB,PRE AMP;,HCL552WX/XAA,P54A	
	0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,-	
	0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
	0204-001024	FLUX;DF-98TVS,-,20%,-	
RR01	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
CR01	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
LR01	2701-000112	INDUCTOR-AXIAL;100uH,10%,3x7mm	
CN905	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGHT,SN	
CN905	AA39-20033K	LEAD CONNECTOR-ASSY;,3P,67096-003,S,800MM,2547#26	
PCB	AA41-10436A	PCB-PREAMP;SPT51A,1,FR-1,245x245x1.6T	
RMR01	AA59-60001Z	MODULE-REMOCON;-,ORC-638V1/SR-5CP2,38KHz,940n	
	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,-,ZPC(BLK),	
	AA61-00724B	BRACKET-RMC;HCL552W,652W,SECC,T1.0	
	AA63-10002A	BAND-TIE;-,NYLON66 V2,-,-,L100,NTR,-	

ASSY-PCB,SUB

	*AA95-00705B	ASSY-PCB,SUB;,PCL545R,P54A	
R307	2003-001038	R-METAL OXIDE(S);4.7ohm,5%,2W,AF,TP,3.9x10mm	
	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SWRCH1	

ASSY-PCB,V/M

	*AA95-00714A	ASSY-PCB,V/M;PCL545R,P54A	
	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	

ASSY-PCB,TERMINAL

	*AA95-00716A	ASSY-PCB,TERMINAL;PCL545R,P54A	
JKV04	3722-001382	JACK-RCA;5P(9P),3.4MM,NI,R/W/G/BLUE,-	

ASSY-PCB,POWER

	*AA95-00799A	ASSY-PCB,POWER;PCL545R,P54A	
EY01	AA60-40011A	EYELET;ID2.0,OD2.8,BST,	

ASSY CABINET MASK

	*AA91-00695A	ASSY CABINET MASK;,HB,BLK,DG902+BK901 P54A,HCL6	
	AA64-02011A	CABINET-FRONT,MASK;652W,L1442.4 APCHUL,ABS,HB,GR	
	AA64-02011A	CABINET-FRONT,MASK;652W,L1442.4 APCHUL,ABS,HB,G	
	AA64-02013A	CABINET-MASK,SIDE;652W,L837.4 APCHUL,ABS,HB,GRAY	
CF	AA63-00380A	COVER-CORNER;PJT,POLYESTER,-,-,CLR,#572 T0.088,-	
	AA64-02011B	CABINET-FRONT,MASK;652W,DG902+BK901 SEA,ABS,HB,	
	AA64-02011C	CABINET-FRONT,MASK;652W,DG902+BK901 SEA,ABS,HB,	
	AA64-02013B	CABINET-MASK,SIDE;652W,GD902+BK901,ABS,HB,GRAY	

7-6 HCL652WX/XAA(HCL652WX/XAA and PCL545RX/XAA Dissimilar parts)

Loc. No.	Code No.	Description ; Specification	Remark

ASSY CHASSIS PART

	*AA90-00112C	ASSY CHASSIS PART;P54A,HCL652W	
TBA+AV	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWRCH18	
TBA+HC	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SWRCH1	
	AA61-00051B	HOLDER-CHASSIS;-,PCJ533R,ABS,VO,GRAY,E-2	

ASSY CABINET

	*AA90-00113F	ASSY-CABINET;652W,HCL652WX/XAA	
	0203-000367	TAPE-CELLULOSE;#430,-,W19,L25,CLR	
SS+ST	0203-001279	TAPE-OPP MASKING;#232,T0.14,W15,L50000,YEL	
FOCUS+CW	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SWRCH1	
APR+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
CBB+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
CBB+HC	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
CBB+TBA	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
CBM+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
CBT+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
CW+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
DCJ+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
DOOR+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
LF+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
BCM+CW	6006-001094	SCREW-ASS'Y WOOD;WW,HH,+,M7,L32,ZPC(YEL),SWRCH	
	AA26-00101A	TRANS FBT;FWZ50A001E,-,-,-,-,-,-,-,-,-	
	AA60-00026A	SPACER-SPONGE;655W,EVA SPONGE,-,-,-,-,-,-,200X30X4T	
	AA60-00069H	SPACER-SCREEN;71J8,ABS,-,-,-,BLK,-,-,HB L1440	
	AA60-00069M	SPACER-SCREEN;652W,ABS HB,BLK,L840	
	AA60-00113A	SPACER-COVER,DUST;652W,SPONGE,T2.0,94HF-1	
AC+BCM	AA60-10011A	SCREW-TAPTITE;,SWRCH18A,M4,L12,HH,+,PC,,ZPC(BLK),S	
CRT+RB	AA61-00733B	HOLDER-COUPLER;HCL652W,P54A,ABS HB,BLK,CRT R/B	
	AA61-20285A	HOLDER-BOX;-,3456,PP,VO,WHT,-	
	AA63-00109A	COVER-MIRROR;-,HCJ655W,-,WOOD,-,BLK,-,-	
	AA63-00464A	COVER-BACK,TOP;HCL652W,WOOD,BLK	
	AA63-00465A	COVER-DUST;HCL652W,WOOD,BLK	
	AA63-10007C	BAND-PP;-,-,-,W18,-,CLEAR,1G	
	AA63-30225A	COVER-WOOD;-,SPT-555JHD,-,WOOD,-,-,-,-	
	AA63-60131A	SPACER-FELT;SVP403J,FELT,-,-,-,BLK,T0.5,-,80x70	
	AA63-70002A	SHEET;-,PE FOAM,T1.0,-,-,-,50G	
	AA64-00623A	CABINET-BACK,BOARD;,652W,HARDBOARD,HIPS,V0,BLK,T	
	AA64-80052A	LEG-FRONT;-,SPT555JHD,DG703P,HIPS,HB,BLK,-	
	AA67-00009A	SCREEN-TINT;-,65W,DNP,P=0.72,TINT=10%,3.0,1468,864	
	AA67-00021A	SUN SCREEN,HC;,65¢©W,H/C,A/S,PMMA,TRAN=82%,T2,1	
	AA67-00052A	MIRROR-FRONT;65W,GLASS,T3.0,FSM,,1210*950*713(158)	
	AA68-00233A	LABEL-WARNING;A/P 90(G),PCJ533R,-,-,-,-	
AP3001	AA68-50509A	LABEL-BOX;A/P 90(G),ALL MODEL,-,WHT,L250	
	AA69-00158E	PACKING-CASE,MID;652W,655W SEA NEW,H-3 AB,YEL	
	AA69-00159A	PACKING-COVER;HCJ-655W,-,S-1 A,YEL,2368,1272,-,-	
	AA69-00159D	PACKING-COVER;652W,655W SEA NEW,S-1 A,YEL	
	AA69-00167A	PAD-CUSHION;CB DW2 + EPS,YEL,2600,800,-,-,HCJ-655W,-	
	AA69-00306A	BAG AIR;LDPE,-,1800,1000,CLR,ASSY,ALL,-	
	AA69-01088F	PALLET-SET;HCJ-655W,PAPER,1670,950,130	
	AA69-01099B	CUSHION SET;HCL-652W,EPS C=0.02	
	AA69-01102A	PAD TYPE;HCL652W,DW-2 AB,920,1550,YEL	
	AA69-30036C	BAG-PE;HDPE T0.02 CLR,-,2500,2500,-,-,HCJ655W,-	
	AA91-00696A	ASSY-DECORATION,JERSEY;,PS HB BLK,SP-500G JERSEY,H	
	AA63-00063A	SPACER-DUAL,LOCK;SVP-614J,#400,-,-,-,-,-,-,19X19	
	AA64-02008B	DECORATION-COVER,JERSEY;HCL655W,HIPS,HB,BLK	

ASSY TERMINAL BOARD

	*AA91-00594B	ASSY TERMINAL BOARD;,HIPS,VO,BLK,P54A,HCL552W	
	AA63-00045B	TERMINAL-BOARD,ANT;-,HIPS,-,PCJ533R,-	
	AA64-01709B	INLAY BACK;HCL552W,PS SHEET,BLK,P54A SEA	

Loc. No.	Code No.	Description ; Specification	Remark

ASSY-CABINET,WOOD

	*AA91-00694A	ASSY-CABINET,WOOD;,WOOD,P54A SDE8326R,HCL652W	
TW-SPK	3001-000153	SPEAKER;20W,8ohm,93dB,1.3KHz	
C-SPK	3001-001045	SPEAKER;15W,8ohm,91dB,65Hz	
W-SPK	3001-001116	SPEAKER;30W,8ohm,96dB,60Hz	
	3811-000446	WIRE-PVC CU;TCWA,600V,ROLL,17/0.16mm,#22,B	
	3811-000480	WIRE-PVC CU;BCWA,1KV,ROLL,17/0.16mm,#22,BL	
	AA39-00042B	LEAD CONNECTOR-ASSY;,2.7UF,REC,REC,300MM,1007#22	
	AA39-00220B	LEAD CONNECTOR ASSY;,12P,67096-012,67096003(4),3000/	
	AA39-20609A	LEAD CONNECTOR-ASSY;,2P,SMH250-02,REC,400MM,1007	
CABWOOD	AA60-10050X	SCREW-WOOD;,SWRCH18A,M3.5,L32,FH,+,,ZPC(YEL),PROJ	
BF+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,ZPC(BLK),PRJT	
BR+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,ZPC(BLK),PRJT	
CAS+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,ZPC(BLK),PRJT	
HL+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,ZPC(BLK),PRJT	
SPK+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,ZPC(BLK),PRJT	
CW+CW	AA60-10051B	SCREW-WOOD;-,SWRCH18A,M3.5,L11,RH,+,ZPC(YEL),PRJT	
HW+CW	AA60-10051B	SCREW-WOOD;-,SWRCH18A,M3.5,L11,RH,+,ZPC(YEL),PRJT	
	AA61-00094F	HOLDER-RAIL;-,65W2DR,ABS,HB,BLK,L185	
	AA61-00097A	HOLDER-WIRE;-,-,NYLON 6/6,-,NTR,-	
	AA61-00458B	CASTER;-,-,TP4020-05 PLY,OH56,-,-,SR44.4 T2	
	AA61-00510K	HOLDER-SCREEN;652W,ABS,-,-,-,BLK,HB,L1474	
	AA61-00510L	HOLDER-SCREEN;652W,ABS,-,-,-,BLK,HB,L844	
	AA61-00644B	HOLDER-SENSOR;P54A(PRJT),PC,VIOLET	
	AA61-00724B	BRACKET-RMC;HCL552W,652W,SECC,T1.0	
	AA61-10247A	BRACKET-FOCUS;S46DS,SECC,T1.0,-,-,-,-	
	AA61-10387A	BRACKET-GRILLE;SVP-462J,SECC-1,T0.5,-,-,-,-	
	AA61-20136A	HOLDER-MASK,PIN;-,S4388,NYLON,-,BLK,#066	
	AA61-20298A	HOLDER-LEG;-,SPT555JHD,ABS,HB,BLK,-	
	AA63-00063A	SPACER-DUAL,LOCK;SVP-614J,#400,-,-,-,-,-,-,19X19	
	AA63-00066D	SPACER-DUAL,LOCK;,#250,25X60	
	AA64-02010A	CABINET-WOOD;HCL652W,P54A SDE8326R,WOOD	
	AA65-00014C	CLAMP-WIRE;54J9,SINGLE NYLON,BLK	
	AA98-00049C	ASSY-LEAD,CON;-,LEAD-CON,CORE,AA39-20505S,-,-	

ASSY CABINET BOT

	*AA91-10404E	ASSY CABINET BOT;,V0 BLK,JERSEY SP700N,HCL552W,65	
	AA60-40009A	PIN-MASK;-,-,-,-,NYLON66,-	
	AA61-20295A	HOLDER-PIN;-,SPT555JHD,ABS,HB,BLK,-	
	AA64-31212C	CABINET-FRONT,B;HCL552W,SP700N,HIPS,V0,BLK	

ASSY-DOOR

	*AA95-01155A	ASSY-DOOR;,HCL652W/552W,P54A	
KF+DB	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SWRCH1	
K-POWER	AA61-60116A	SPRING-CS;-,SUS304,-,D16,H4,N18,-,-,-	
K-OPEN	AA61-60117A	SPRING-CS;-,SUS304,-,D17,H5.5,N13,-,-,-	
	AA64-10756A	KNOB-POWER;-,-,-,ABS,HB,GRAY	
	AA64-10757A	KNOB-FAMILY;-,-,-,ABS,HB,GRAY	
	AA64-10758A	KNOB-OPEN;-,-,-,ABS,HB,GRAY	
	AA64-50248B	DOOR-BODY;-,HCJ655W,-,ABS,HB,GRAY,-,-	
	AA64-60434A	INLAY-CONTROL;-,-,PS,TO.3,BLA,-,-	
	0203-001085	TAPE-DOUBLE FACE;#4929,T0.64,W12,-,BLK	
	AA61-20297A	BASE-WING;-,-,ABS,HB,GRAY,-	
	AA61-40112A	HINGE-DOOR;-,HB,GRAY,-,-	
	AA61-60115A	SPRING-PLATE;PS,SK-5,-,-,-,-,T0.25,SPT555J,	
	AA64-50249A	DOOR-CASE;-,-,-,ABS,HB,GRAY,-,-	
	AA64-50253B	DOOR-AL;-,SVP-65W2DR,SILVER,AL,-,-,T1.0,-	
	0203-001085	TAPE-DOUBLE FACE;#4929,T0.64,W12,-,BLK	
	AA63-30221A	COVER-DOOR;-,-,-,ABS,HB,GRAY,-,-	
	AA63-30224B	COVER-AL;-,SVP-65W2DR,SILVER,AL,-,-,T1.0,-	
	0205-000001	GREASE-LITHUM;EM-50L,TEMP(-45~150),D=0.84	
BM+MT	6001-000057	SCREW-MACHINE;RH,+,M3,L6,ZPC(BLK),SWRCH18A,F	

Loc. No.	Code No.	Description ; Specification	Remark
PC+DB	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SWRCH1	
	6003-001233	SCREW-TAPTITE;PWH,+,P,M3,L8,ZPC(BLK),SWCRH18A	
DB+BM	6006-000255	SCREW-ASS'Y MACH;WSP,PH,+,M3,L6,ZPC(WHT),SWRC	
DG+BM	6044-001028	RING-E;ID3,OD7,T0.6,BLK,SK5	
	AA61-00069A	BRACKET-MOTOR,ASSY;HCH551W,SECC-1+SUM 24L,,NTR,	
	AA61-20311A	HOLDER-SHAFT;-,-,POM,M90-44,NAT,P15xH5.5	
	AA61-20312A	HOLDER-CAP;-,-,POM,M90-44,NAT,-	
	AA61-80058A	DAMPER-GEAR,A;-,POM,-,-,WHT,-,-,-,-,-,-,-	
	AA61-80059A	DAMPER-GEAR,B;-,POM,-,-,WHT,-,-,-,-,-,-,-	
	AA61-80060A	DAMPER-GEAR,C;-,POM,-,-,WHT,-,-,-,-,-,-,-	
	AA61-80061A	DAMPER-GEAR,WARM;-,POM,-,-,WHT,-,-,-,-,-,-,-	
	AA63-00129A	SPACER-RUBBER,TOWER;HCH551W,EPDM,BLK,M3 NUT-I	
	AA63-10002A	BAND-TIE;-,NYLON66 V2,-,-,L100,NTR,-	
	AA65-30105C	CLAMP-WIRE;ALL MODEL,NYLON 66,V2,NTR,5MM,-,-,-	
	AA68-01087B	LABEL-MODULE;AA95-00364A,A/P90(G),-,-,-,-,-,-,DOOR,-	
	AA91-20071C	ASSY-DOOR,BODY;-,-,P51A E2,652W,552W	
	AA91-20072B	ASSY-DOOR,SLIDE;-,-,SILVER,SVP-65W2DR	
	AA91-20073B	ASSY-DOOR,COVER;-,-,SILVER,SVP-65W2DR	
	AA95-01156A	ASSY-PCB,CONTROL A/V;,HCL552WX/XAA,P54A,USA	
	AA95-90029A	ASSY-PCB,DOOR SUB;-,SPT-555JHD,APT52A,-,-,MVT	
	0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,-	
	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
	0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
	0204-001024	FLUX;DF-98TVS,-,20%,-	
DY01	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
DY02	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
DZY01	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500mW	
QY02	0501-000303	TR-SMALL SIGNAL;KSA733,PNP,250mW,TO-92,TP,120-240	
QY01	0504-000123	TR-DIGITAL;KSR1010,NPN,300mW,10K,TO-92,TP	
ICY03	0904-001121	IC-I/O SUPPORT CHIP;8574,8BIT,DIP,16P,300MIL,100KH	
ICY04	0904-001121	IC-I/O SUPPORT CHIP;8574,8BIT,DIP,16P,300MIL,100KH	
ICY01	1003-001090	IC-MOTOR DRIVER;LB1643,SIP,10P,-,SINGLE,1.6A,S	
ICY02	1202-000103	IC-VOLTAGE COMP.;393,DIP,8P,300MIL,DUAL,36V,CMO	
RY36	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY37	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY43	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY44	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY04	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY07	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY23	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY09	2001-000347	R-CARBON;13KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY30	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY31	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY41	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY42	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY47	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY50	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY51	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY34	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY08	2001-000539	R-CARBON;24KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY10	2001-000539	R-CARBON;24KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY02	2001-000633	R-CARBON;30KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY24	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY35	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY45	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY48	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY01	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY49	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY32	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY33	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY11	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY12	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12mm	
RY22	2004-000218	R-METAL;10Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
RY21	2004-000253	R-METAL;11Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
CY01	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
CY03	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0mm,	
CY06	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0mm,	
CY04	2401-000444	C-AL;10uF,20%,25V,GP,TP,5x5mm,5mm	
CY05	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
CY02	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
LY01	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
SWY01	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
SWY02	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
SWY03	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
SWY04	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
SWY05	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
SWY06	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
SWY07	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
SWY08	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
CNY03	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGHT,SN	
CNY04	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGHT,SN	
CNY02	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGHT,SN	
JKY01	3722-000544	JACK-VHS;4P,11.5mm,AG,BLK,N	
JKY02	3722-001041	JACK-RCA;1P,3.4mm,#16-22,AU	
JKY04	3722-001042	JACK-RCA;1P,3.4mm,#16-22,AU	
JKY03	3722-001043	JACK-RCA;1P,3.4mm,#16-22,AU	
JY01	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY02	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY03	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY04	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY05	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY06	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY07	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY08	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY09	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY10	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY11	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY12	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY13	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY14	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY15	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY16	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY17	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY18	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY19	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY20	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY21	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY23	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY24	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
CNW902	AA39-00117A	LEAD CONNECTOR-ASSY;,11P,YBNH250-11,35155-1100,1	
CNW204	AA39-20159G	LEAD CONNECTOR-ASSY;,12P,YBNH250-12,67096-012,17	
PCB	AA41-00067C	PCB-CONTROL A/V;HCL552W,FR-1,1L,C,1.6T,330X245,P54	
	AA63-10002A	BAND-TIE;-,NYLON66 V2,-,-,L100,NTR,-	
	AA68-01083V	LABEL-MODULE;AA95-00306A,A/P90(G),-,-,-,-,-,CONTROL,-	

ASSY PCB MAIN(OPT)

	*AA94-03388G	ASSY PCB MAIN(OPT);HCL652WX/XAA,P54A,U.S.A
R673A	2001-001142	R-CARBON(S);3KOHM,5%,1/2W,AA,TP,2.4X6.4MM
CN602	3711-002644	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,STRAIGHT,SN
J379	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm
J382	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm
J384	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm
J385	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm
	AA59-40003P	MODULE-FOCUS,PACK;-,F300,NTSC,43,64x62,BK
EY01	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-
EY02	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-
EY04	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-
BAND	AA63-10002A	BAND-TIE;-,NYLON66 V2,-,-,L100,NTR,-
WIRE	AA65-30018A	CLAMP-WIRE;NYLON-66,-,-,DATL-600,DONG-A,-
	AA65-30104B	CLAMP-WIRE;NYLON 66,V2,BLK,W2 Z5,ALL MODE
	AA65-30105B	CLAMP-WIRE;NYLON 66,V2,NTR,25MM,ALL MODEL
US0175	AA68-00526A	LABEL-RATING;ART PAPER(90),ALL MODEL,LAMINATING,5
C904	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,8x3,5

ASSY CRT-(G)

	*AA94-03600A	ASSY CRT-(G);P16LSG03HKA,+380MG,7,PCL6215R,BARE
	AA67-10066A	LENS-ASSY;DELTA 37,-,-,CLEAR A/B,-,-,-

ASSY ACCESSORY

	*AA94-03663A	ASSY ACCESSORY;HCL552WX/XAA,P54A,U.S.A,SEA
	AA68-01509A	MANUAL USERS;HCL552W,ENG,W/P100(G),2(1),B5,P54A,6

Loc. No.	Code No.	Description ; Specification	Remark

ASSY CRT-(R)

	*AA94-03729A	ASSY CRT-(R);P16LSG03RJA,+380MG,7,HCL652W,BARE	
	AA64-01314C	CASE-COUPLER,RED;652W,T2.0,AL SHEET,RED	
	AA67-10066A	LENS-ASSY;DELTA 37,-,-,CLEAR A/B,-,-,-	

ASSY CRT-(B)

	*AA94-03730A	ASSY CRT-(B);P16LSG03BMB,+380MG,7,HCL652W,BARE	
	AA64-01316C	CASE-COUPLER,BLUE;652W,T2.0,AL SHEET,BLUE	
	AA67-10066A	LENS-ASSY;DELTA 37,-,-,CLEAR A/B,-,-,-	

ASSY-PCB,CENTER SPK

	*AA95-00307A	ASSY-PCB,CENTER SPK;-,PCJ552WX/XAA,P51A,-,-,USA	
	0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,-	
	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
	0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
	0204-001024	FLUX;DF-98TVS,-,20%,-	
RC601	2001-000052	R-CARBON(S);3.3KOHM,5%,1/2W,AA,TP,2.4X6.4MM	
RC612	2001-001067	R-CARBON(S);11KOHM,5%,1/2W,AA,TP,2.4X6.4MM	
RC613	2001-001067	R-CARBON(S);11KOHM,5%,1/2W,AA,TP,2.4X6.4MM	
RC602	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.4MM	
RC605	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.4MM	
RC606	2001-001103	R-CARBON(S);20KOHM,5%,1/2W,AA,TP,2.4X6.4MM	
RC611	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4MM	
RC608	2001-001131	R-CARBON(S);33KOHM,5%,1/2W,AA,TP,2.4X6.4MM	
RC607	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4MM	
RC603	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
RC604	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
CC607	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
CC605	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0mm,	
CC606	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0mm,	
CC601	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
CC603	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
CC604	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
CC602	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
CC608	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
CCN01	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGHT,SN	
CCN03	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGHT,SN	
CCN02	3711-002644	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,STRAIGHT,SN	
JC02	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
CCNW02	AA39-20020J	LEAD CONNECTOR-ASSY;,5P,67096-005,S,400,1007#26	
CCNW01	AA39-20608A	LEAD CONNECTOR-ASSY;,3(2)P,SMP250-02,67096-03,900M	
PCB	AA41-00120A	PCB-CENTER SPK;P51A,1L,FR-1,245X245X1.6T,9A,V-CUT,7	
EY03	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	
	AA63-10002A	BAND-TIE;-,NYLON66 V2,-,-,L100,NTR,-	
	AA68-01082R	LABEL-MODULE;AA95-00307A,A/P90(G),-,-,--,-,CENTER SPK	
ICC601	AA96-50381C	ASSY-H/S;-,-,AA62-30180B,TDA2052,-	

ASSY-PCB,PRE AMP

	*AA95-00357B	ASSY-PCB,PRE AMP;,HCL552WX/XAA,P54A	
	0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,-	
	0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
	0204-001024	FLUX;DF-98TVS,-,20%,-	
RR01	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
CR01	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
LR01	2701-000112	INDUCTOR-AXIAL;100uH,10%,3x7mm	
CN905	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGHT,SN	
CN905	AA39-20033K	LEAD CONNECTOR-ASSY;,3P,67096-003,S,800MM,2547#26	
PCB	AA41-10436A	PCB-PREAMP;SPT51A,1,FR-1,245x245x1.6T	
RMR01	AA59-60001Z	MODULE-REMOCON;-,ORC-638V1/SR-5CP2,38KHz,940n	
	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,-,ZPC(BLK),	
	AA61-00724B	BRACKET-RMC;HCL552W,652W,SECC,T1.0	

Loc. No.	Code No.	Description ; Specification	Remark

ASSY-PCB,SUB

	*AA95-00705B	ASSY-PCB,SUB;,PCL545R,P54A	
R307	2003-001038	R-METAL OXIDE(S);4.7ohm,5%,2W,AF,TP,3.9x10mm	
	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SWRCH1	

ASSY-PCB,TERMINAL

	*AA95-00715C	ASSY-PCB,TERMINAL;,HCL552W,P54A	
CNY02	AA39-20052D	LEAD CONNECTOR-ASSY;,4P,YBNH025-04,YSH025-04,700,1	

ASSY-PCB,INTERFACE

	*AA95-00968A	ASSY-PCB,INTERFACE;PCL545R,P54A	
	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
	AA63-10002A	BAND-TIE;-,NYLON66 V2,-,-,L100,NTR,-	

ASSY-PCB,CRT

	*AA95-00970A	ASSY-PCB,CRT;P54A,54,U.S.A,PCL545R	
	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	

ASSY-PCB,DOOR SUB

	*AA95-90029A	ASSY-PCB,DOOR SUB;SPT-555JHD,APT52A	
	0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,-	
	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
	0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
	0204-001024	FLUX;DF-98TVS,-,20%,-	
QY03	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,TP,120-240	
QY04	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,TP,120-240	
DY03	0601-000266	LED;CYLINDRICAL,RED,2mm,650nm	
PY1	0604-000203	PHOTO-INTERRUPTER;TR,-,-,-,ST	
PY2	0604-000203	PHOTO-INTERRUPTER;TR,-,-,-,ST	
RY16	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY18	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY19	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY20	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY15	2001-000343	R-CARBON;130OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY17	2001-000343	R-CARBON;130OHM,5%,1/8W,AA,TP,1.8X3.2MM	
JY10	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY11	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
	AA31-10002A	MOTOR-DC;-,RF370C-15370,8V DC,-	
CNY02C	AA39-20052C	LEAD CONNECTOR-ASSY;,4P,YBNH025-04,YSH025-04,500,1	
CNY03C	AA39-20057B	LEAD CONNECTOR-ASSY;,3(2)P,YBNH025-03,67096-003,500	
CNY04C	AA39-20594A	LEAD CONNECTOR-ASSY;,3P,67096-003,700MM,1007#28	
	AA41-11051A	PCB-DOOR SUB;APT52A,1L,FR-1,245x245x1.6T,A1	

7-7 HCL6515WX/XAA(HCL6515WX/XAA and PCL545RX/XAA Dissimilar parts)

Loc. No.	Code No.	Description ; Specification	Remark
		ASSY-DOOR	
	*AA95-00364A	ASSY-DOOR;-,PCJ652W/552W,P51A,-,-,-	
	0205-000001	GREASE-LITHUM;EM-50L,TEMP(-45~150),D=0.84	
BM+MT	6001-000057	SCREW-MACHINE;RH,+,M3,L6,ZPC(BLK),SWRCH18A,F	
PC+DB	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SWRCH1	
	6003-001233	SCREW-TAPTITE;PWH,+,P,M3,L8,ZPC(BLK),SWCRH18A	
DB+BM	6006-000255	SCREW-ASS'Y MACH;WSP,PH,+,M3,L6,ZPC(WHT),SWRCH	
DG+BM	6044-001028	RING-E;ID3,OD7,T0.6,BLK,SK5	
	AA61-00069A	BRACKET-MOTOR,ASSY;HCH551W,SECC-1+SUM 24L,,NTR,	
	AA61-20311A	HOLDER-SHAFT;-,-,POM,M90-44,NAT,P15xH5.5	
	AA61-20312A	HOLDER-CAP;-,-,POM,M90-44,NAT,-	
	AA61-80058A	DAMPER-GEAR,A;-,POM,-,-,WHT,-,-,-,-,-,-,-	
	AA61-80059A	DAMPER-GEAR,B;-,POM,-,-,WHT,-,-,-,-,-,-,-	
	AA61-80060A	DAMPER-GEAR,C;-,POM,-,-,WHT,-,-,-,-,-,-,-	
	AA61-80061A	DAMPER-GEAR,WARM;-,POM,-,-,WHT,-,-,-,-,-,-,-	
	AA63-00129A	SPACER-RUBBER,TOWER;HCH551W,EPDM,BLK,M3 NUT-IN	
	AA63-10002A	BAND-TIE;-,NYLON66 V2,-,-,L100,NTR,-	
	AA65-30105C	CLAMP-WIRE;ALL MODEL,NYLON 66,V2,NTR,5MM,-,-,-	
	AA68-01087B	LABEL-MODULE;AA95-00364A,A/P90(G),-,-,-,-,-,-,DOOR,-	
	AA91-20071C	ASSY-DOOR,BODY;-,-,P51A E2,652W,552W	
	AA91-20072B	ASSY-DOOR,SLIDE;-,-,SILVER,SVP-65W2DR	
	AA91-20073B	ASSY-DOOR,COVER;-,-,SILVER,SVP-65W2DR	
	AA95-00306A	ASSY-PCB,CONTROL;-,PCJ552WX/XAA,P51A,-,-,USA	
	AA95-90029A	ASSY-PCB,DOOR SUB;-,SPT-555JHD,APT52A,-,-,MVT	
KF+DB	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SWRCH1	
K-POWER	AA61-60116A	SPRING-CS;-,SUS304,-,D16,H4,N18,-,-,-	
K-OPEN	AA61-60117A	SPRING-CS;-,SUS304,-,D17,H5.5,N13,-,-,-	
	AA64-10756A	KNOB-POWER;-,-,-,ABS,HB,GRAY	
	AA64-10757A	KNOB-FAMILY;-,-,-,ABS,HB,GRAY	
	AA64-10758A	KNOB-OPEN;-,-,-,ABS,HB,GRAY	
	AA64-50248B	DOOR-BODY;-,HCJ655W,-,ABS,HB,GRAY,-,-	
	AA64-60434A	INLAY-CONTROL;-,-,PS,T0.3,BLA,-,-	
	0203-001085	TAPE-DOUBLE FACE;#4929,T0.64,W12,-,BLK	
	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SWRCH1	
	AA61-20297A	BASE-WING;-,-,ABS,HB,GRAY,-	
	AA61-40112A	HINGE-DOOR;-,HB,GRAY,-,-	
	AA61-60115A	SPRING-PLATE;PS,SK-5,-,-,-,-,T0.25,SPT555J,	
	AA64-50249A	DOOR-CASE;-,-,-,ABS,HB,GRAY,-,-	
	AA64-50253B	DOOR-AL;-,SVP-65W2DR,SILVER,AL,-,-,T1.0,-	
	0203-001085	TAPE-DOUBLE FACE;#4929,T0.64,W12,-,BLK	
	AA63-30221A	COVER-DOOR;-,-,-,ABS,HB,GRAY,-,-	
	AA63-30224B	COVER-AL;-,SVP-65W2DR,SILVER,AL,-,-,T1.0,-	
	0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,-	
	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
	0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
	0204-001024	FLUX;DF-98TVS,-,20%,-	
DY01	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
DY02	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
DZY01	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500mW	
QY02	0501-000303	TR-SMALL SIGNAL;KSA733,PNP,250mW,TO-92,TP,120-240	
QY01	0504-000123	TR-DIGITAL;KSR1010,NPN,300mW,10K,TO-92,TP	
ICY03	0904-001121	IC-I/O SUPPORT CHIP;8574,8BIT,DIP,16P,300MIL,100KH	
ICY04	0904-001121	IC-I/O SUPPORT CHIP;8574,8BIT,DIP,16P,300MIL,100KH	
ICY01	1003-001090	IC-MOTOR DRIVER;LB1643,SIP,10P,-,SINGLE,1.6A,S	
ICY02	1202-000103	IC-VOLTAGE COMP.;393,DIP,8P,300MIL,DUAL,36V,CMO	
RY36	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY37	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY43	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY44	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY04	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY07	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY23	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY09	2001-000347	R-CARBON;13KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY30	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY31	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY41	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY42	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY47	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY50	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY51	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY34	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY08	2001-000539	R-CARBON;24KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY10	2001-000539	R-CARBON;24KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY02	2001-000633	R-CARBON;30KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY24	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY35	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY45	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY48	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY01	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY49	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY32	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY33	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY11	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY12	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12mm	
RY22	2004-000218	R-METAL;10Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
RY21	2004-000253	R-METAL;11Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
CY01	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
CY03	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0mm,	
CY06	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0mm,	
CY04	2401-000444	C-AL;10uF,20%,25V,GP,TP,5x5mm,5mm	
CY05	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
CY02	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
LY01	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
SWY01	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
SWY02	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
SWY03	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
SWY04	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
SWY05	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
SWY06	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
SWY07	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
SWY08	3404-000178	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
CNY03	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGHT,SN	
CNY04	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGHT,SN	
CNY02	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGHT,SN	
JKY01	3722-000544	JACK-VHS;4P,11.5mm,AG,BLK,N	
JKY02	3722-001041	JACK-RCA;1P,3.4mm,#16-22,AU	
JKY04	3722-001042	JACK-RCA;1P,3.4mm,#16-22,AU	
JKY03	3722-001043	JACK-RCA;1P,3.4mm,#16-22,AU	
JY01	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY02	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY03	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY04	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY05	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY06	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY07	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY08	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY09	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY10	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY11	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY12	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY13	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY14	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY15	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY16	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY17	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY18	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY19	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY20	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY21	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY23	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY24	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
CNW902	AA39-00117A	LEAD CONNECTOR-ASSY;,11P,YBNH250-11,35155-1100,1	
CNW204	AA39-20159G	LEAD CONNECTOR-ASSY;,12P,YBNH250-12,67096-012,17	
PCB	AA41-00067B	PCB-CONTROL AV;P51A,1L,FR-1,330x245x1.6T,4A,MC-Hole	
	AA63-10002A	BAND-TIE;-,NYLON66 V2,-,-,L100,NTR,-	
	AA68-01083V	LABEL-MODULE;AA95-00306A,A/P90(G),-,-,-,-,-,COTROL,-	
	0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,-	
	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
	0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
	0204-001024	FLUX;DF-98TVS,-,20%,-	

Loc. No.	Code No.	Description ; Specification	Remark
QY03	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,TP,120-240	
QY04	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,TP,120-240	
DY03	0601-000266	LED;CYLINDRICAL,RED,2mm,650nm	
PY1	0604-000203	PHOTO-INTERRUPTER;TR,-,-,-,ST	
PY2	0604-000203	PHOTO-INTERRUPTER;TR,-,-,-,ST	
RY16	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY18	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY19	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY20	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY15	2001-000343	R-CARBON;130OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RY17	2001-000343	R-CARBON;130OHM,5%,1/8W,AA,TP,1.8X3.2MM	
JY10	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
JY11	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
	AA31-10002A	MOTOR-DC;-,RF370C-15370,8V DC,-	
CNY02C	AA39-20052C	LEAD CONNECTOR-ASSY;,4P,YBNH025-04,YSH025-04,500,1	
CNY03C	AA39-20057B	LEAD CONNECTOR-ASSY;,3(2)P,YBNH025-03,67096-003,50	
CNY04C	AA39-20594A	LEAD CONNECTOR-ASSY;,3P,67096-003,700MM,1007#28	
	AA41-11051A	PCB-DOOR SUB;APT52A,1L,FR-1,245x245x1.6T,A1	

ASSY PCB MAIN(OPT)

*AA94-03388J ASSY PCB MAIN(OPT);HCL6515WX/XAA,P54A,U.S.A

CN602	3711-002644	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,STRAIGHT,SN	
J379	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
J382	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
J384	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
J385	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING),1/0.6mm	
	AA59-40003P	MODULE-FOCUS,PACK;-,F300,NTSC,43,64x62,BK	
EY01	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	
EY02	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	
BAND	AA63-10002A	BAND-TIE;-,NYLON66 V2,-,-,L100,NTR,-	
WIRE	AA65-30018A	CLAMP-WIRE;NYLON-66,-,-,DATL-600,DONG-A,-	
	AA65-30104B	CLAMP-WIRE;NYLON 66,V2,BLK,W2 Z5,ALL MODE	
	AA65-30105B	CLAMP-WIRE;NYLON 66,V2,NTR,25MM,ALL MODEL	
	AA95-01103A	ASSY-PCB,SOUND;,PCL5415R,P54A	
	AA95-01132A	ASSY-PCB,PROSCAN;,PCL6215R,P54A	
C904	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,8x3,5	
ICD601	1204-001631	IC-SOUND PROCESSOR;MSP3450G,QFP,80P,-,PLASTIC,9V,1	
QP701	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,TP,420	
ICP701	1204-001668	IC-PICTURE PROCESS;SDA9488X,SOP,28P,300MIL,PLASTIC,	
IC01	1204-001789	IC-VIDEO PROCESS;VPC3230D-B3,QFP,80P,787MIL,PLASTIC,	
IC04	1205-001172	IC-INTERFACE;CIP3250A-B1,PLCC,68P,-,PLASTIC,5V,-,0to+6	
RP740	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
CR39	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
PR714	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
PR715	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
PR716	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
PR717	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
PR718	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
PR719	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
RP701	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
RP704	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
RP705	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
RP706	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
RP741	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
RP742	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
RP743	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
RP744	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
RP745	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
RP746	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
RP702	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
RP703	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
CR01	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
CP708	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,2012,	
CP710	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,2012,	
CP724	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,2012,	
CP726	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,2012,	
CP732	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,2012,	
CP733	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,2012,	
CP734	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,2012,	
CP750	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,2012,	
CP751	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,2012,	
CP752	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,2012,	
CP753	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,2012,	
CP754	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,2012,	
CP756	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,2012,	
CP728	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
CP729	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
CP701	2203-000274	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,2012	
CP702	2203-000274	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,2012	
CP704	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
CP748	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
CP749	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
CP747	2203-000683	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,2012	
CP745	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
CP746	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
CP757	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
CP703	2203-001223	C-CERAMIC,CHIP;0.82nF,10%,50V,X7R,TP,2012	
CC02	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
CP725	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
CP730	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
CP731	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
CP707	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
CP709	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
CP741	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
CP727	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
CP742	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
CP743	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
CP744	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
YL02	2703-000271	INDUCTOR-SMD;4.7uH,10%,2x1.25x1.25mm	
DL07	2703-000274	INDUCTOR-SMD;2.2uH,10%,1.25x2x0.85mm	
XP701	2801-004019	CRYSTAL-UNIT;20.25MHz,30ppm,28-AAM,13pF,20ohm,BK	
LP701	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,600MA,TP,	
LP702	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,600MA,TP,	
LP703	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,600MA,TP,	
PL03	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,600MA,TP,	
PL04	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,600MA,TP,	
PL05	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,600MA,TP,	

ASSY CRT-(G)

*AA94-03600A	ASSY CRT-(G);P16LSG03HKA,+380MG,7,PCL6215R,BARE
AA67-10066A	LENS-ASSY;DELTA 37,-,-,CLEAR A/B,-,-,-

ASSY ACCESSORY

*AA94-03663A	ASSY ACCESSORY;HCL552WX/XAA,P54A,U.S.A,SEA
AA68-01509A	MANUAL USERS;HCL552W,ENG,W/P100(G),2(1),B5,P54A,

ASSY CRT-(R)

AA94-03729A	ASSY CRT-(R);P16LSG03RJA,+380MG,7,HCL652W,BARE
AA64-01314C	CASE-COUPLER,RED;652W,T2.0,AL SHEET,RED
AA67-10066A	LENS-ASSY;DELTA 37,-,-,CLEAR A/B,-,-,-

ASSY CRT-(B)

AA94-03730A	ASSY CRT-(B);P16LSG03BMB,+380MG,7,HCL652W,BARE
AA64-01316C	CASE-COUPLER,BLUE;652W,T2.0,AL SHEET,BLUE
AA67-10066A	LENS-ASSY;DELTA 37,-,-,CLEAR A/B,-,-,-

ASSY-PCB,PRE AMP

*AA95-00357B	ASSY-PCB,PRE AMP;,HCL552WX/XAA,P54A
0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,-
0204-000442	SOLVENT;1M-1000,C3H70H,96,-

Loc. No.	Code No.	Description ; Specification	Remark
	0204-001024	FLUX;DF-98TVS,-,20%,-	
RR01	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
CR01	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
LR01	2701-000112	INDUCTOR-AXIAL;100uH,10%,3x7mm	
CN905	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGHT,SN	
CN905	AA39-20033K	LEAD CONNECTOR-ASSY;,3P,67096-003,S,800MM,2547#26	
PCB	AA41-10436A	PCB-PREAMP;SPT51A,1,FR-1,245x245x1.6T	
RMR01	AA59-60001Z	MODULE-REMOCON;-,ORC-638V1/SR-5CP2,38KHz,940n	
	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,-,ZPC(BLK)	
	AA61-00724B	BRACKET-RMC;HCL552W,652W,SECC,T1.0	
	AA63-10002A	BAND-TIE;-,NYLON66 V2,-,-,L100,NTR,-	

ASSY-PCB,SUB

	*AA95-00705B	ASSY-PCB,SUB;,PCL545R,P54A	
R307	2003-001038	R-METAL OXIDE(S);4.7ohm,5%,2W,AF,TP,3.9x10mm	

ASSY-PCB,V/M

	*AA95-00714B	ASSY-PCB,V/M;DP,PCL545R,P54A	
BOX	0203-001269	TAPE-OPP MASKING;#301,T0.06,W75,L50000,NTR	
BOX	AA63-70002A	SHEET;-,PE FOAM,T1.0,-,-,-,50G	
BOX	AA69-00607M	PAD CROSS;-,CB DW-2,YEL,1010,80,-,-,-,-	
BOX	AA69-00736E	PAD PLATE;-,CB DW-2,YEL,1010,1010,-,-,-,-	
	AA69-00739S	MASTER CARTON;-,CB DW-3,YEL,1020,1020,190,-,-	

ASSY-PCB,TERMINAL

	*AA95-00716A	ASSY-PCB,TERMINAL;,PCL545R,P54A	
JKV04	3722-001382	JACK-RCA;5P(9P),3.4MM,NI,R/W/G/BLUE,-	

ASSY-PCB,INTERFACE

	AA95-00968A	ASSY-PCB,INTERFACE;PCL545R,P54A	
	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
	AA63-10002A	BAND-TIE;-,NYLON66 V2,-,-,L100,NTR,-	

ASSY PCB CRT

	*AA95-00970B	ASSY PCB CRT;DP,P54A,54,U.S.A,PCL545R	
BOX	0203-001269	TAPE-OPP MASKING;#301,T0.06,W75,L50000,NTR	
	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
BOX	AA69-00902P	PAD CROSS;-,CB DW-2,YEL,360,125,-,-,-,-	
BOX	AA69-00902Q	PAD CROSS;-,CB DW-2,YEL,550,125,-,-,-,-	
BOX	AA69-10165A	PAD-PLATE;CB SW-2,YEL,550,360,-,-,-,-	
BOX	AA69-40013A	MASTER-CARTON;CB DW-3,560,370,410,YEL,-,-,-	

MENO

8. Block Diagram

8-1 Main Signal(Progressive)

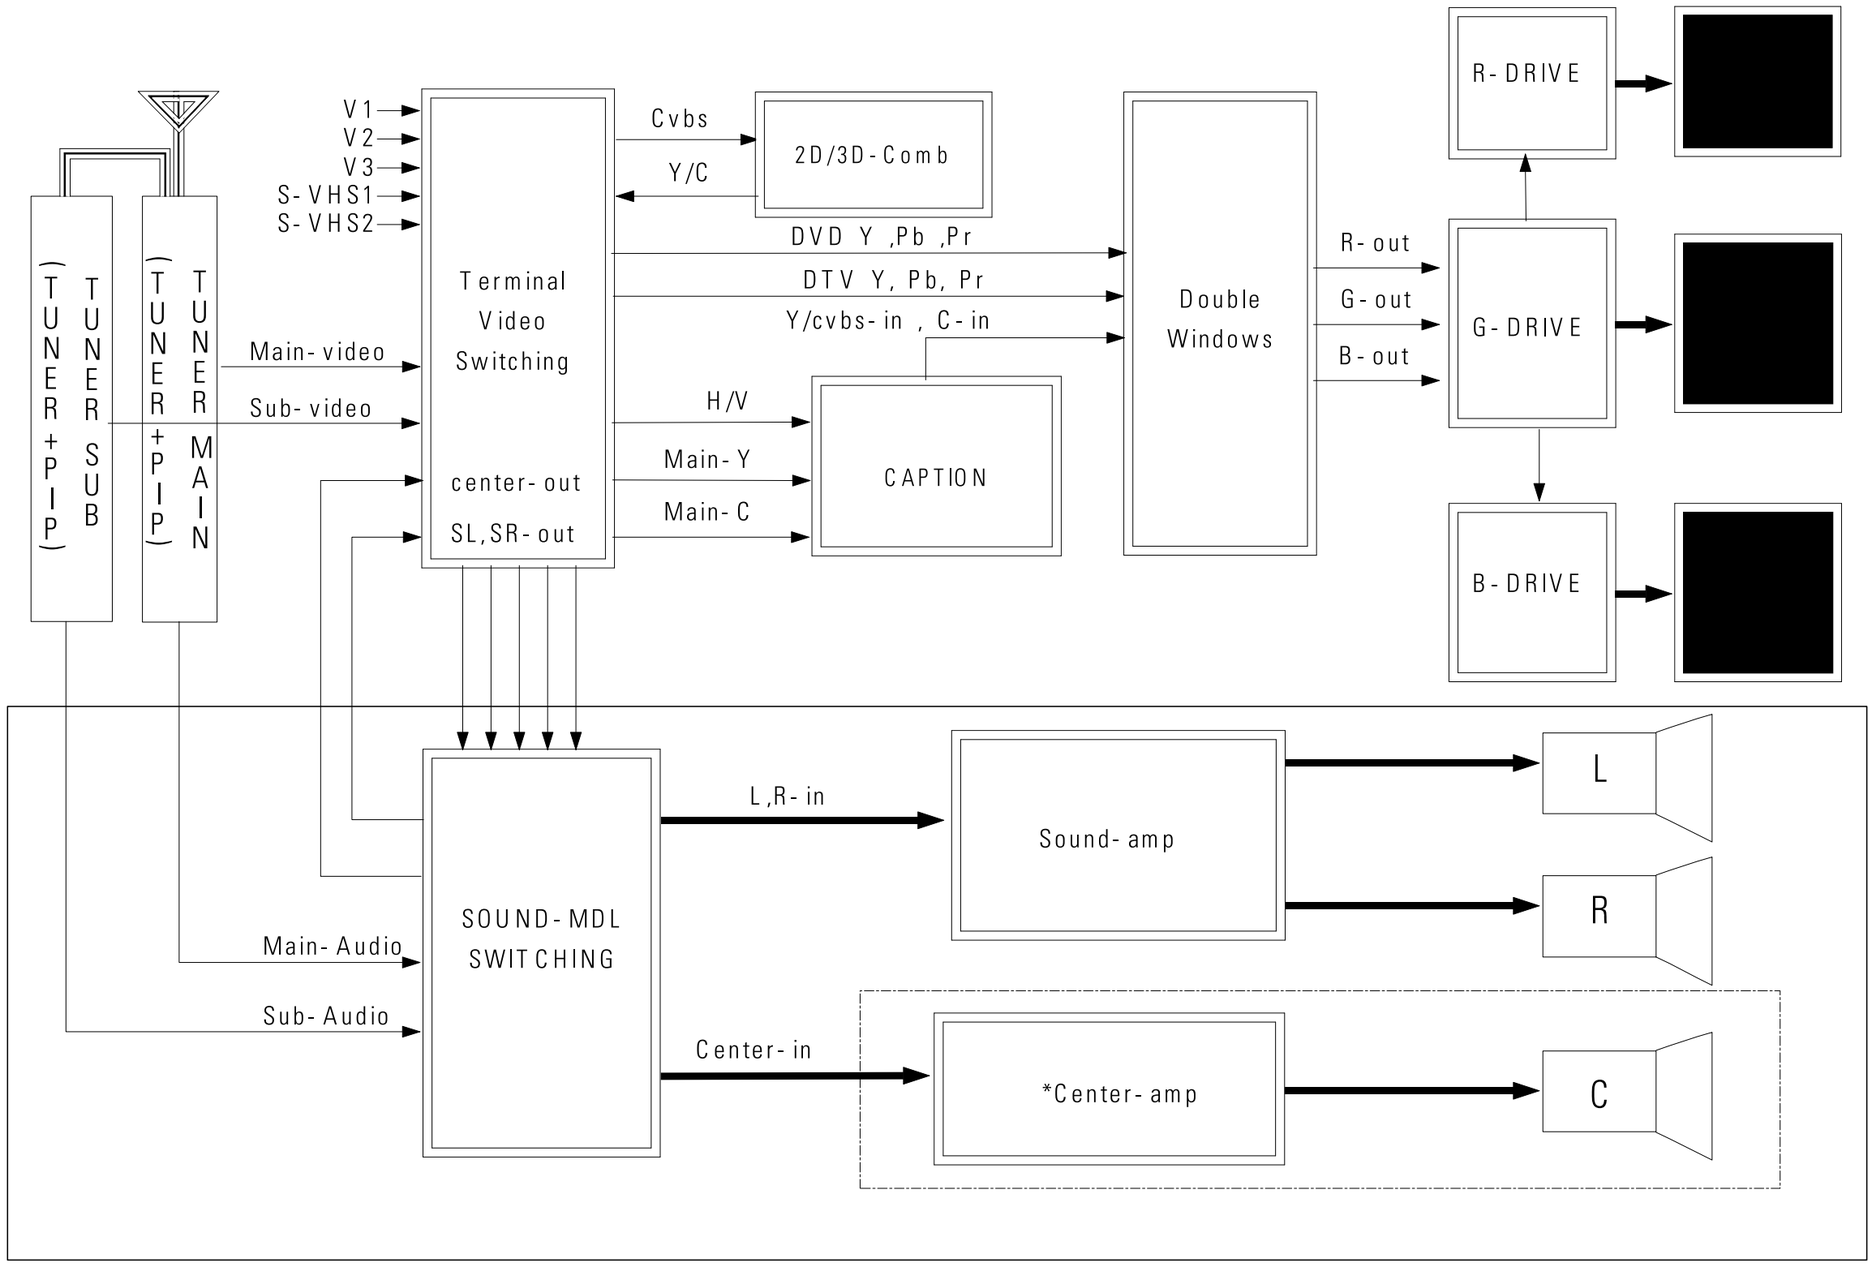

8-2 Video Signal

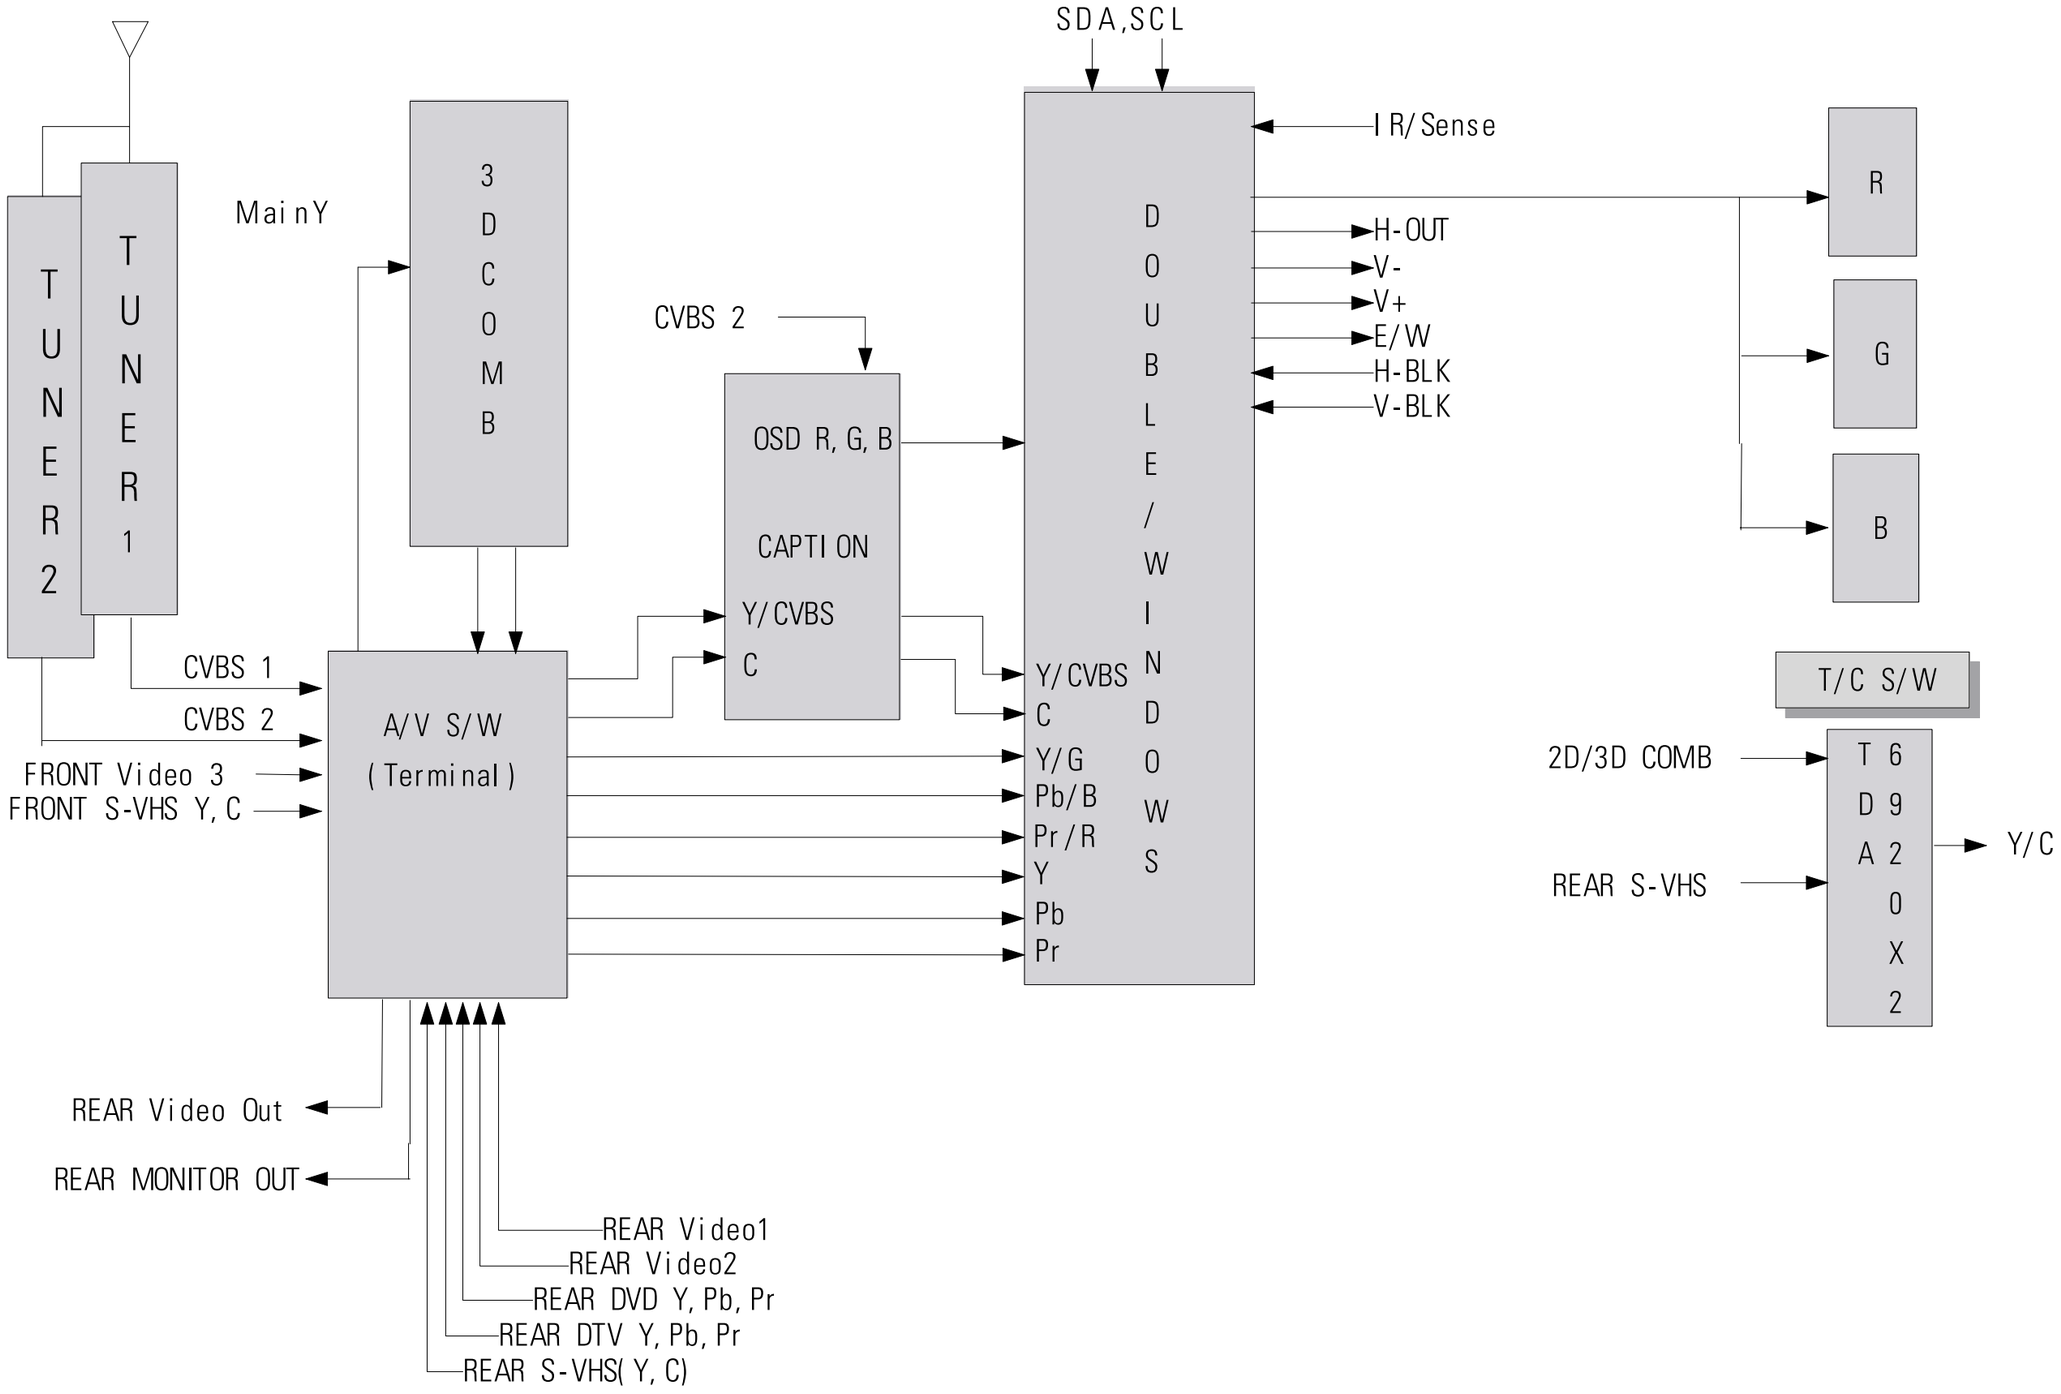

8-3 Sound Signal

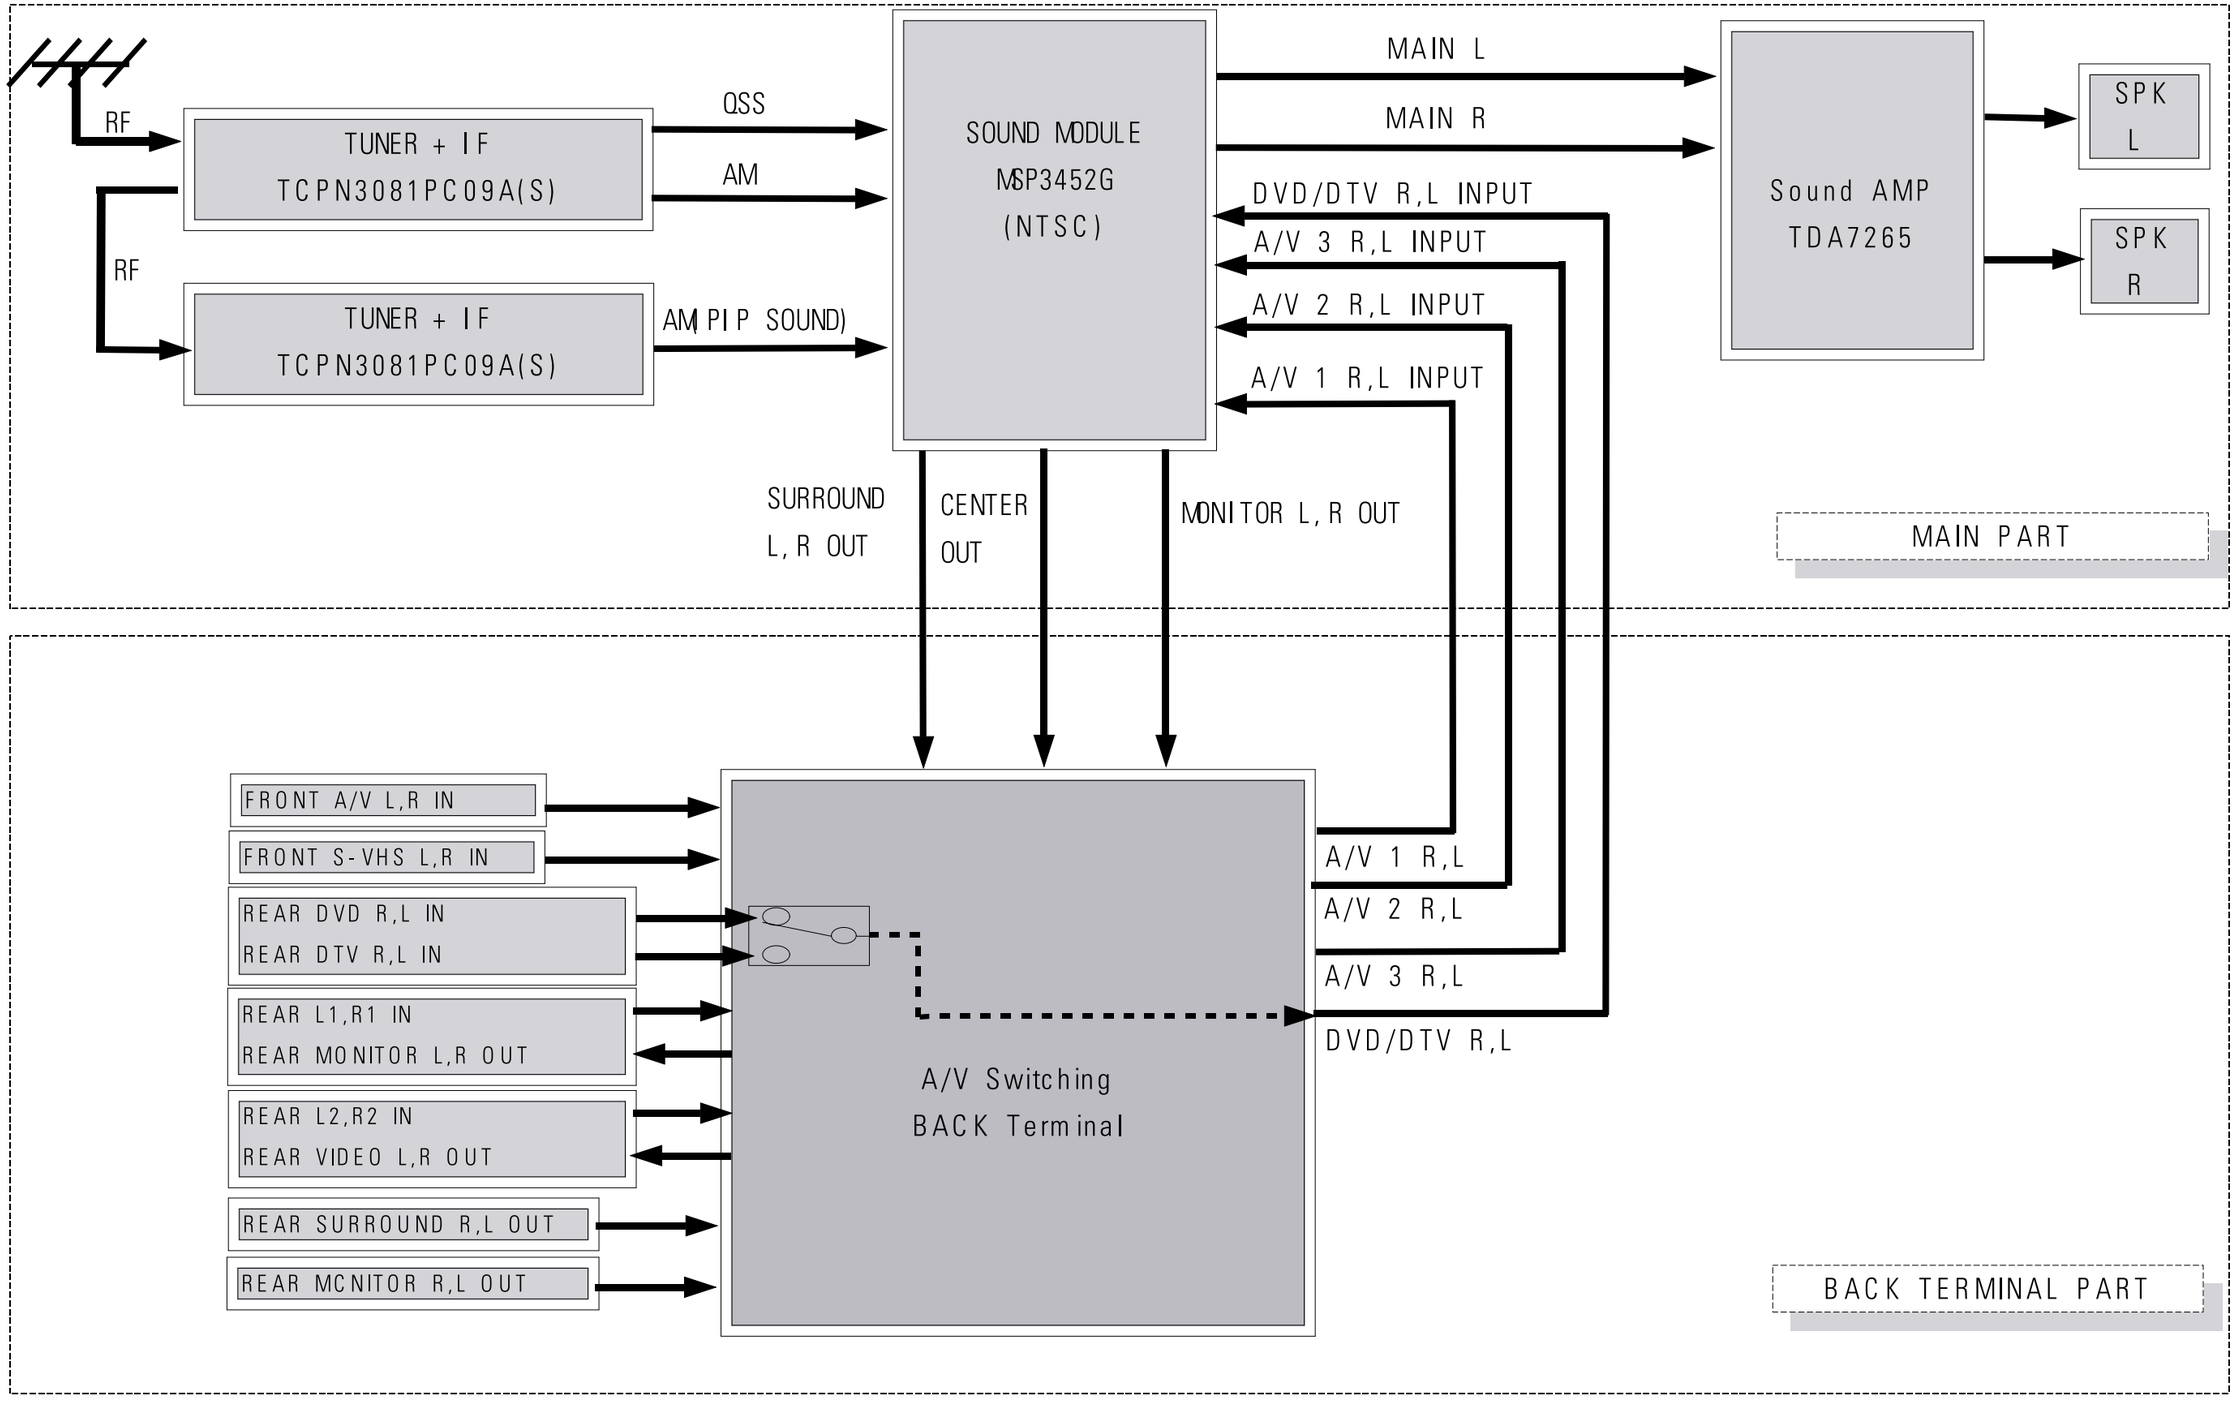

8-4 Power Supply

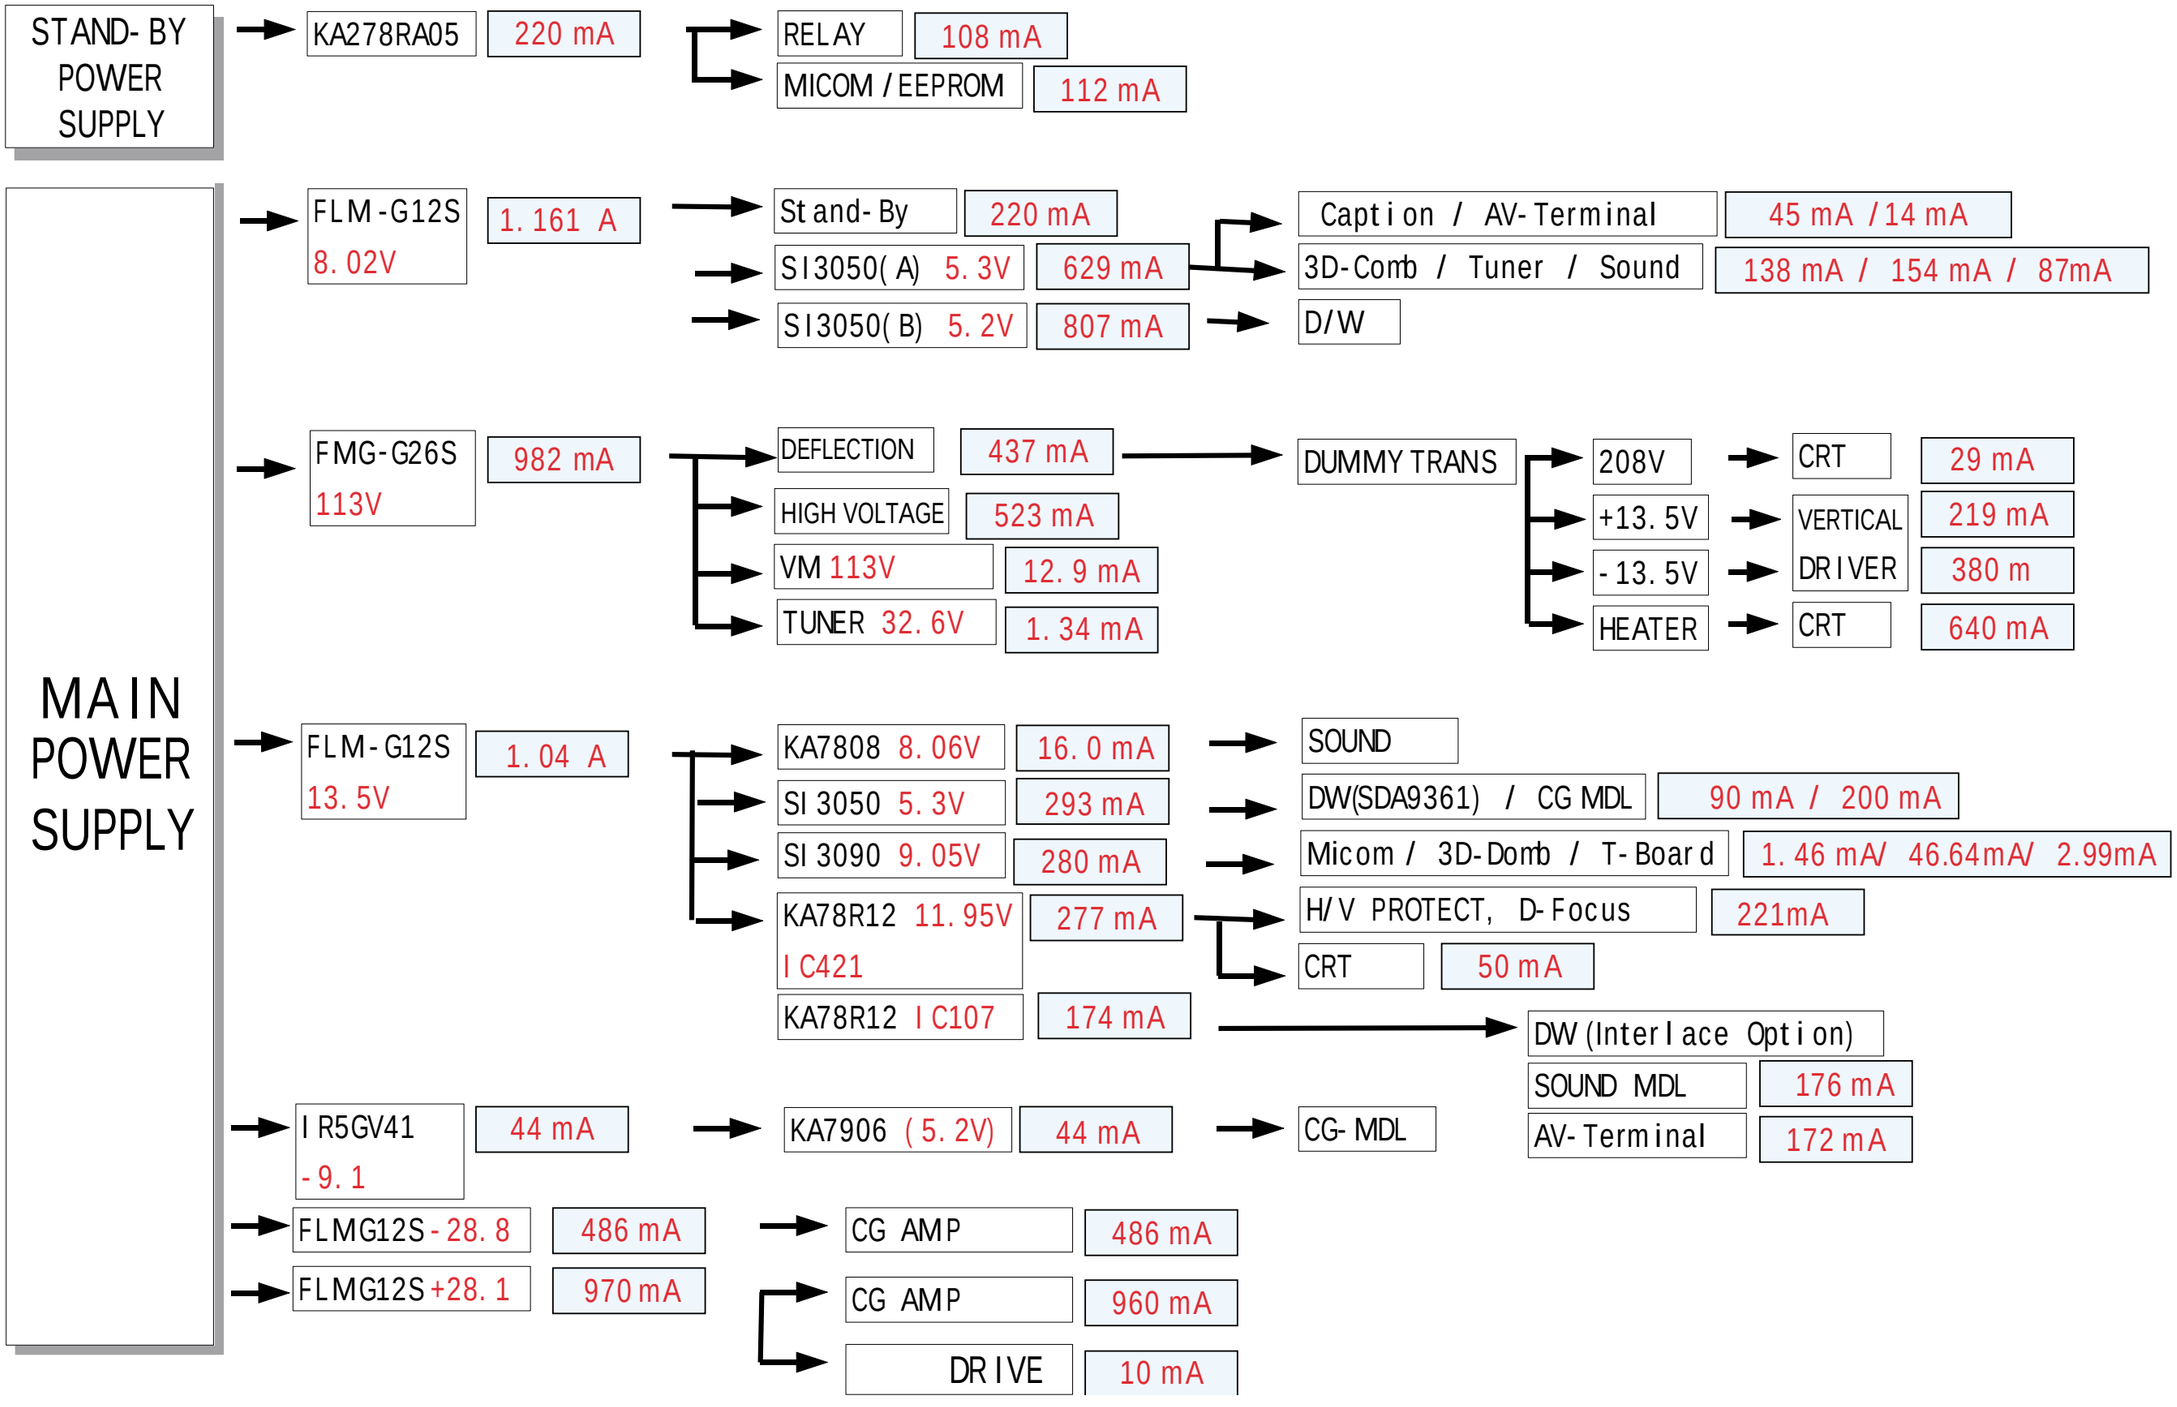

8-5 Auto Convergence Block

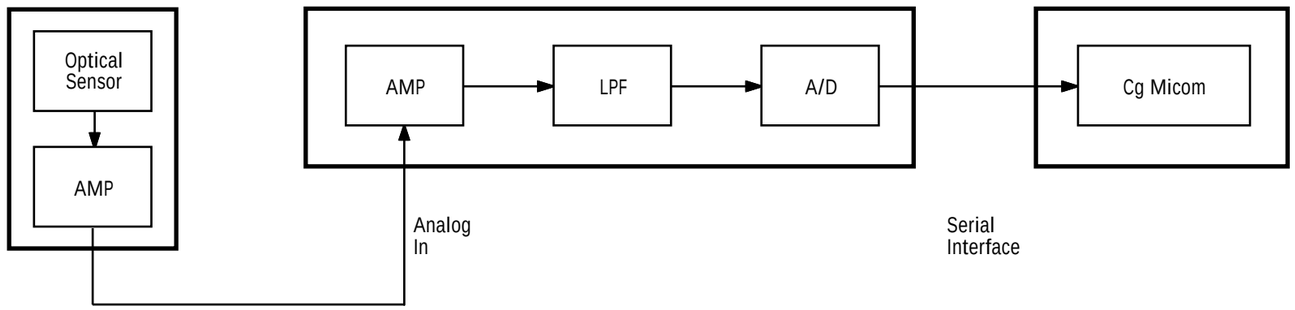

8-6 In/Out by Block

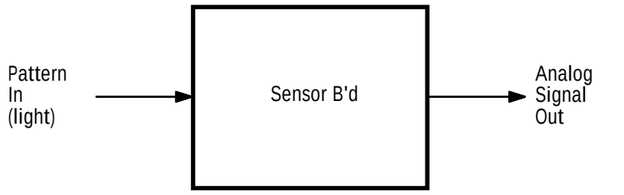

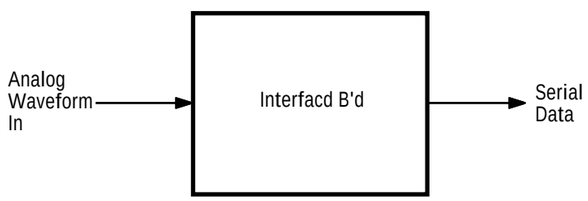

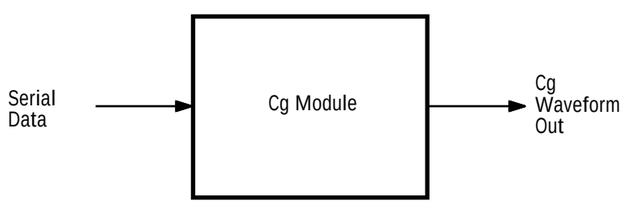

8-7 Signal Connection by Block

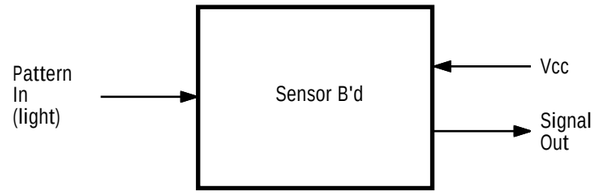

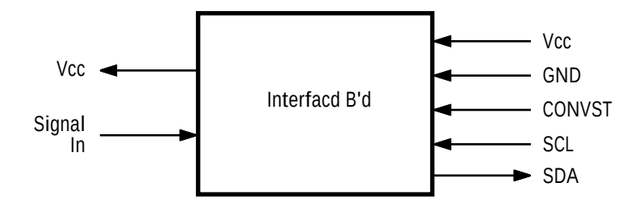

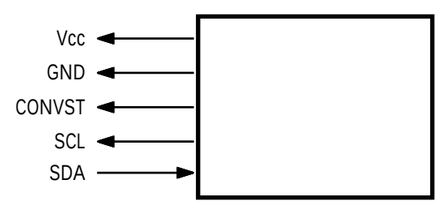

8-8 Auto Convergence Flow

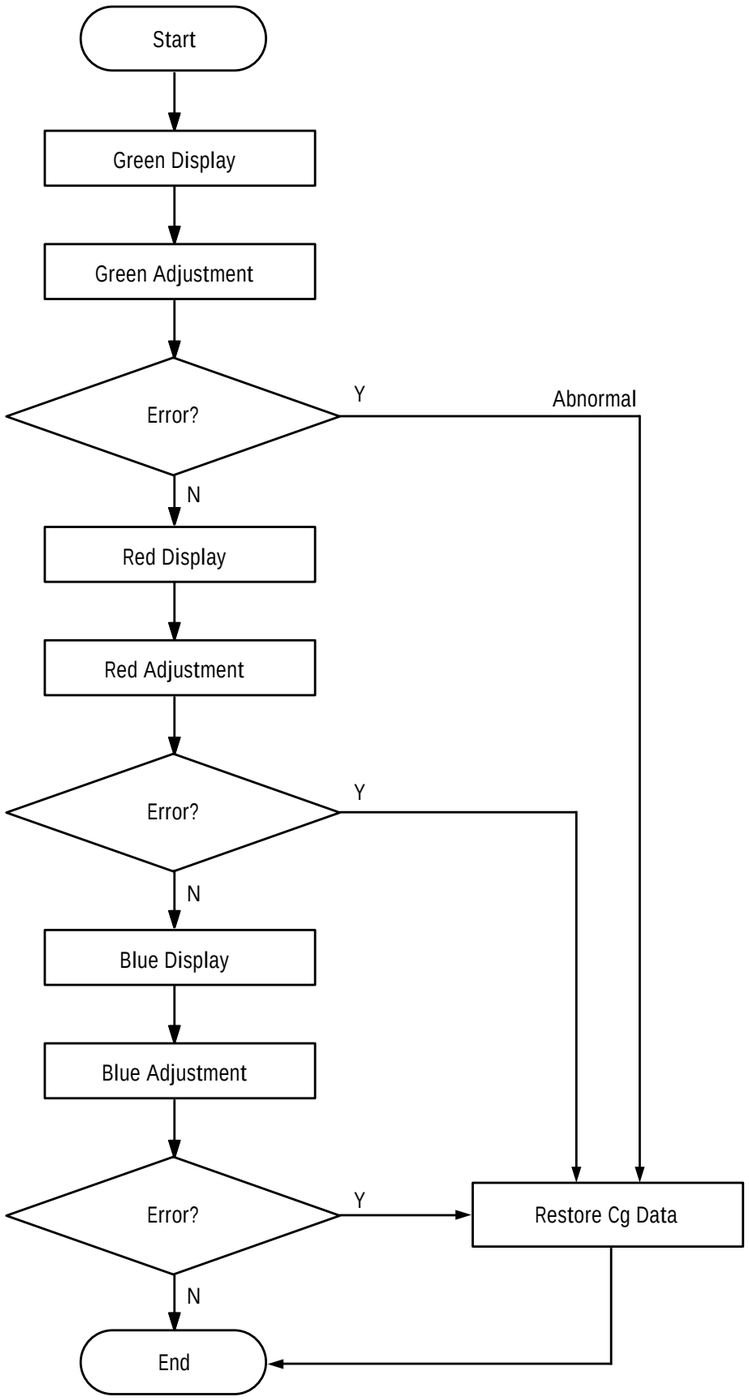

8-9 Auto Magnetic Field Adjustment Flow

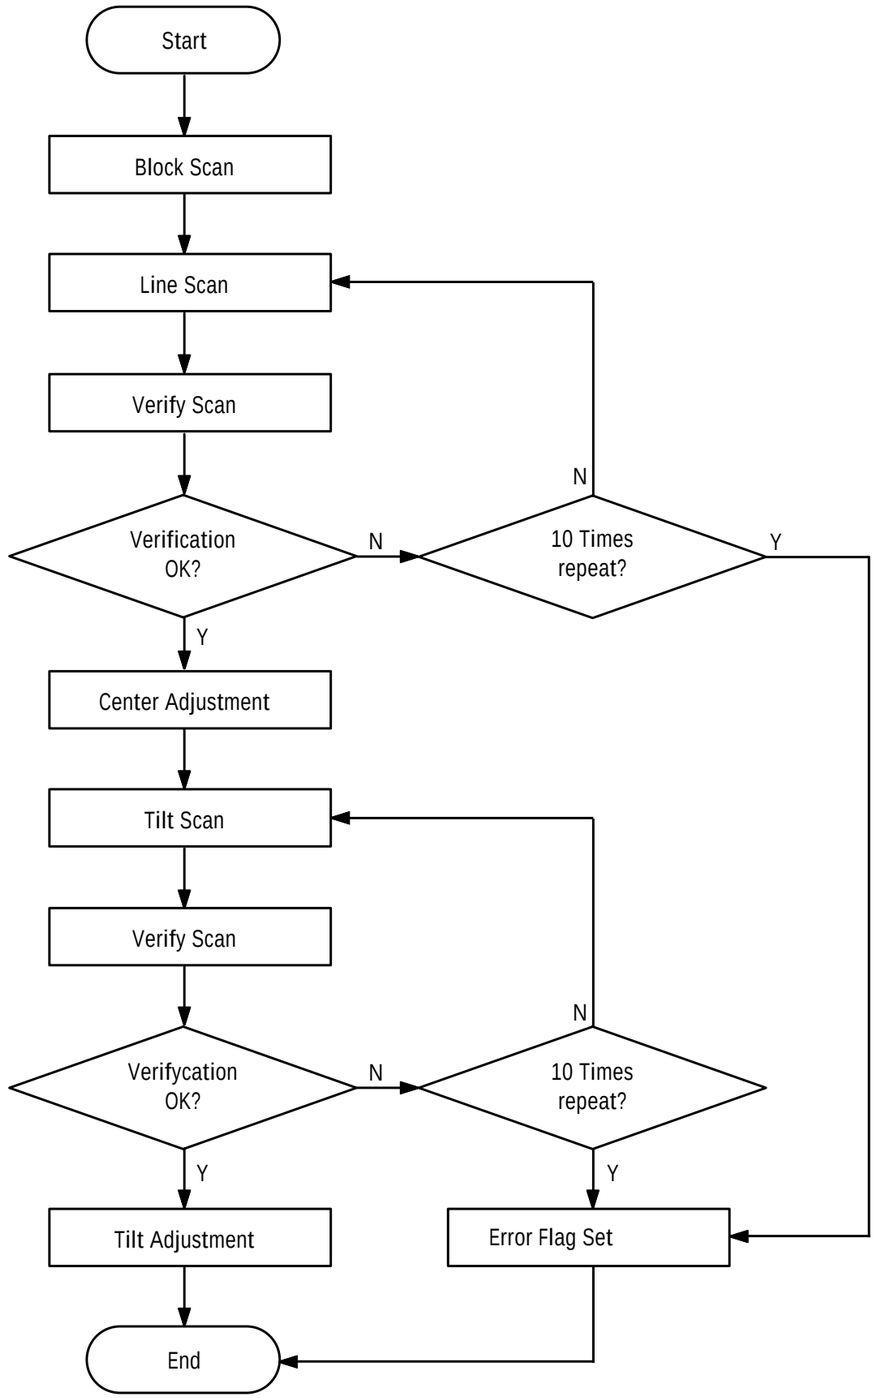

9. Wiring Diagram

9-1 Pcb Connection(Progressive)

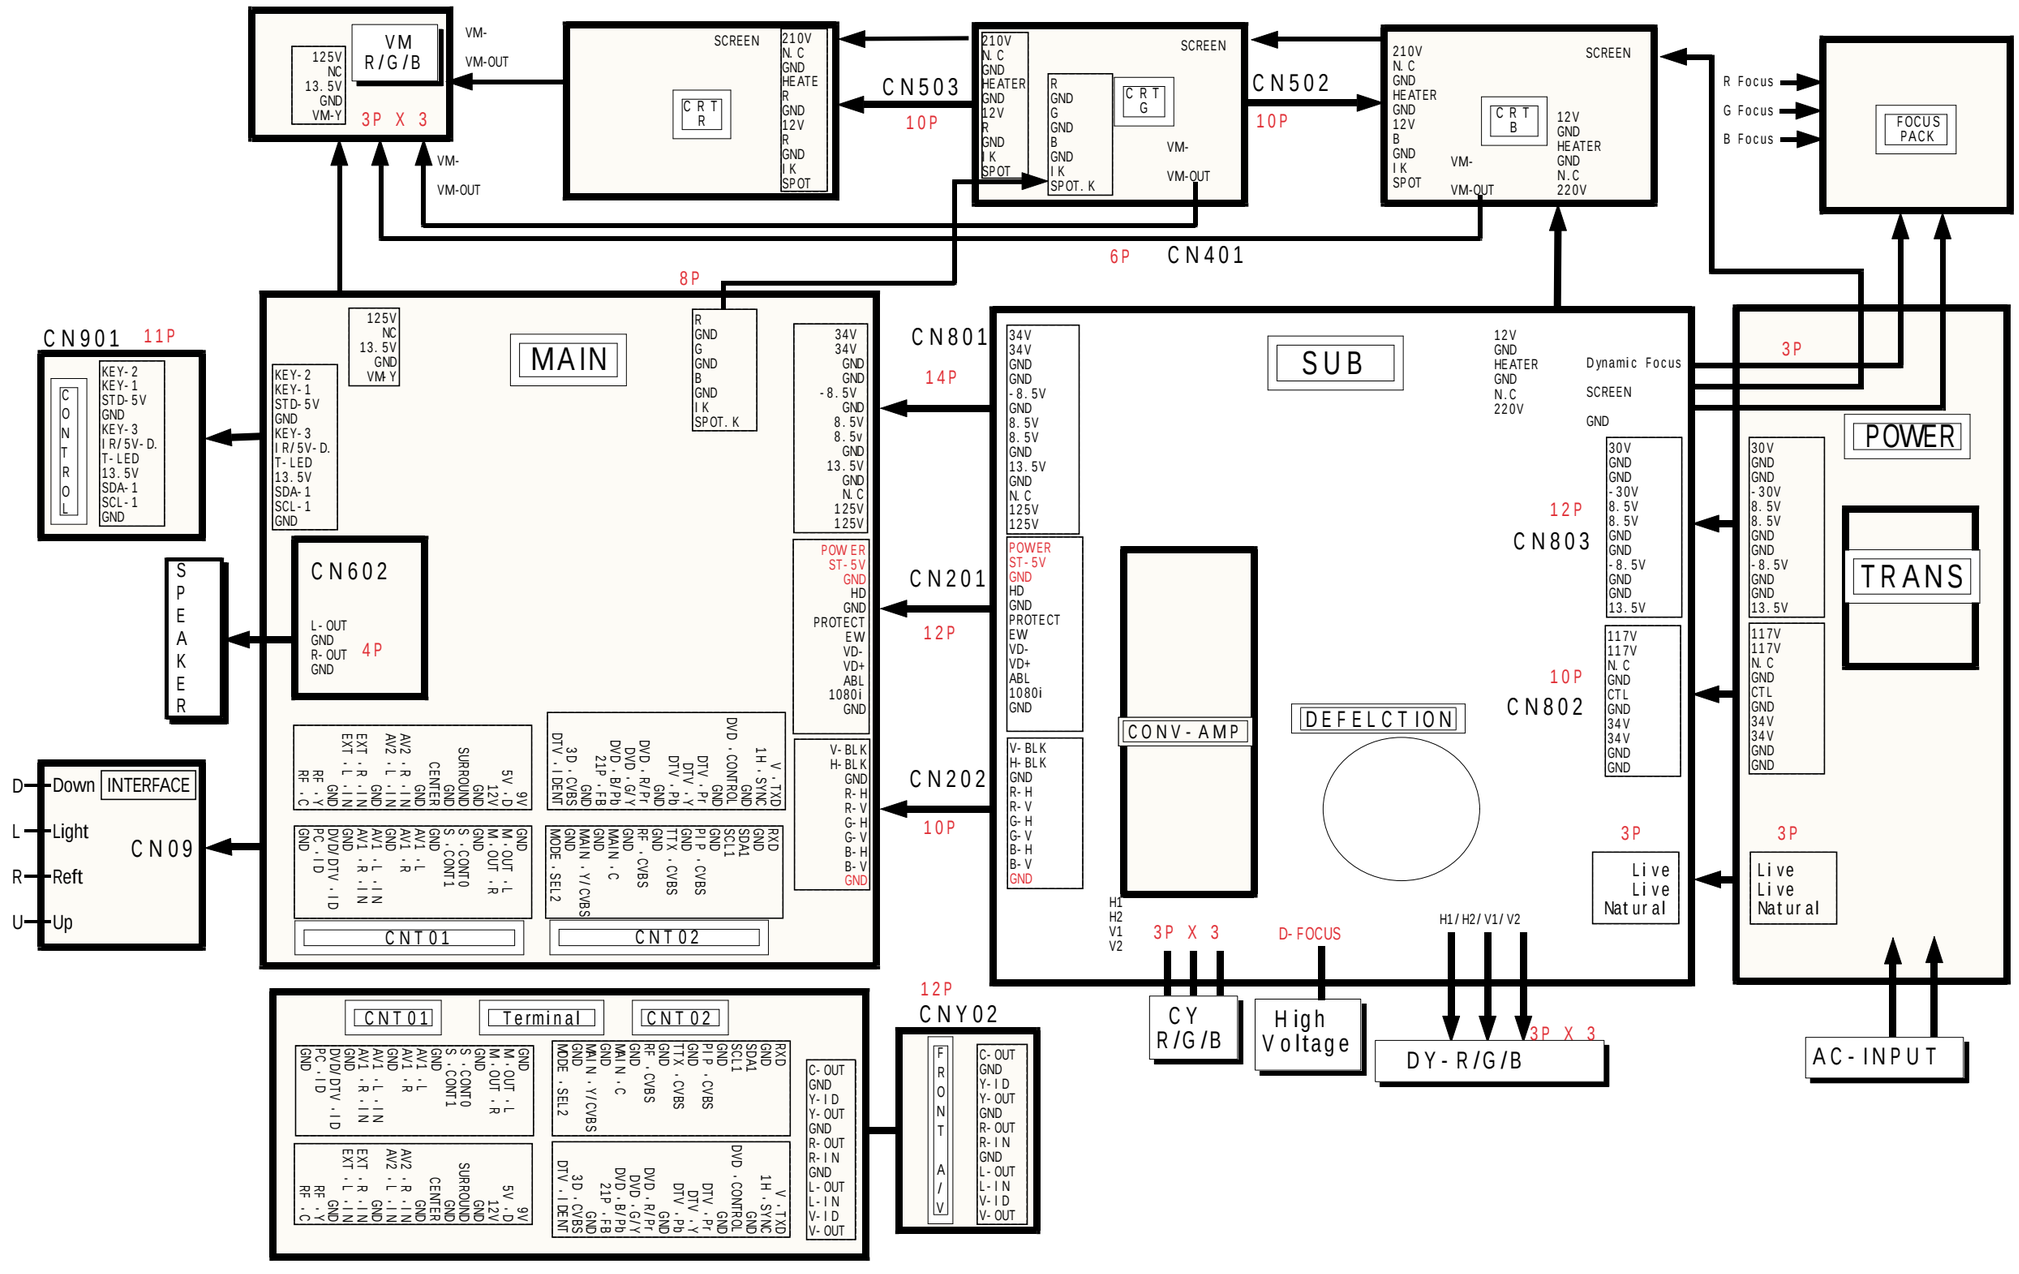

10. Schematic Diagrams

10-1 MAIN 1

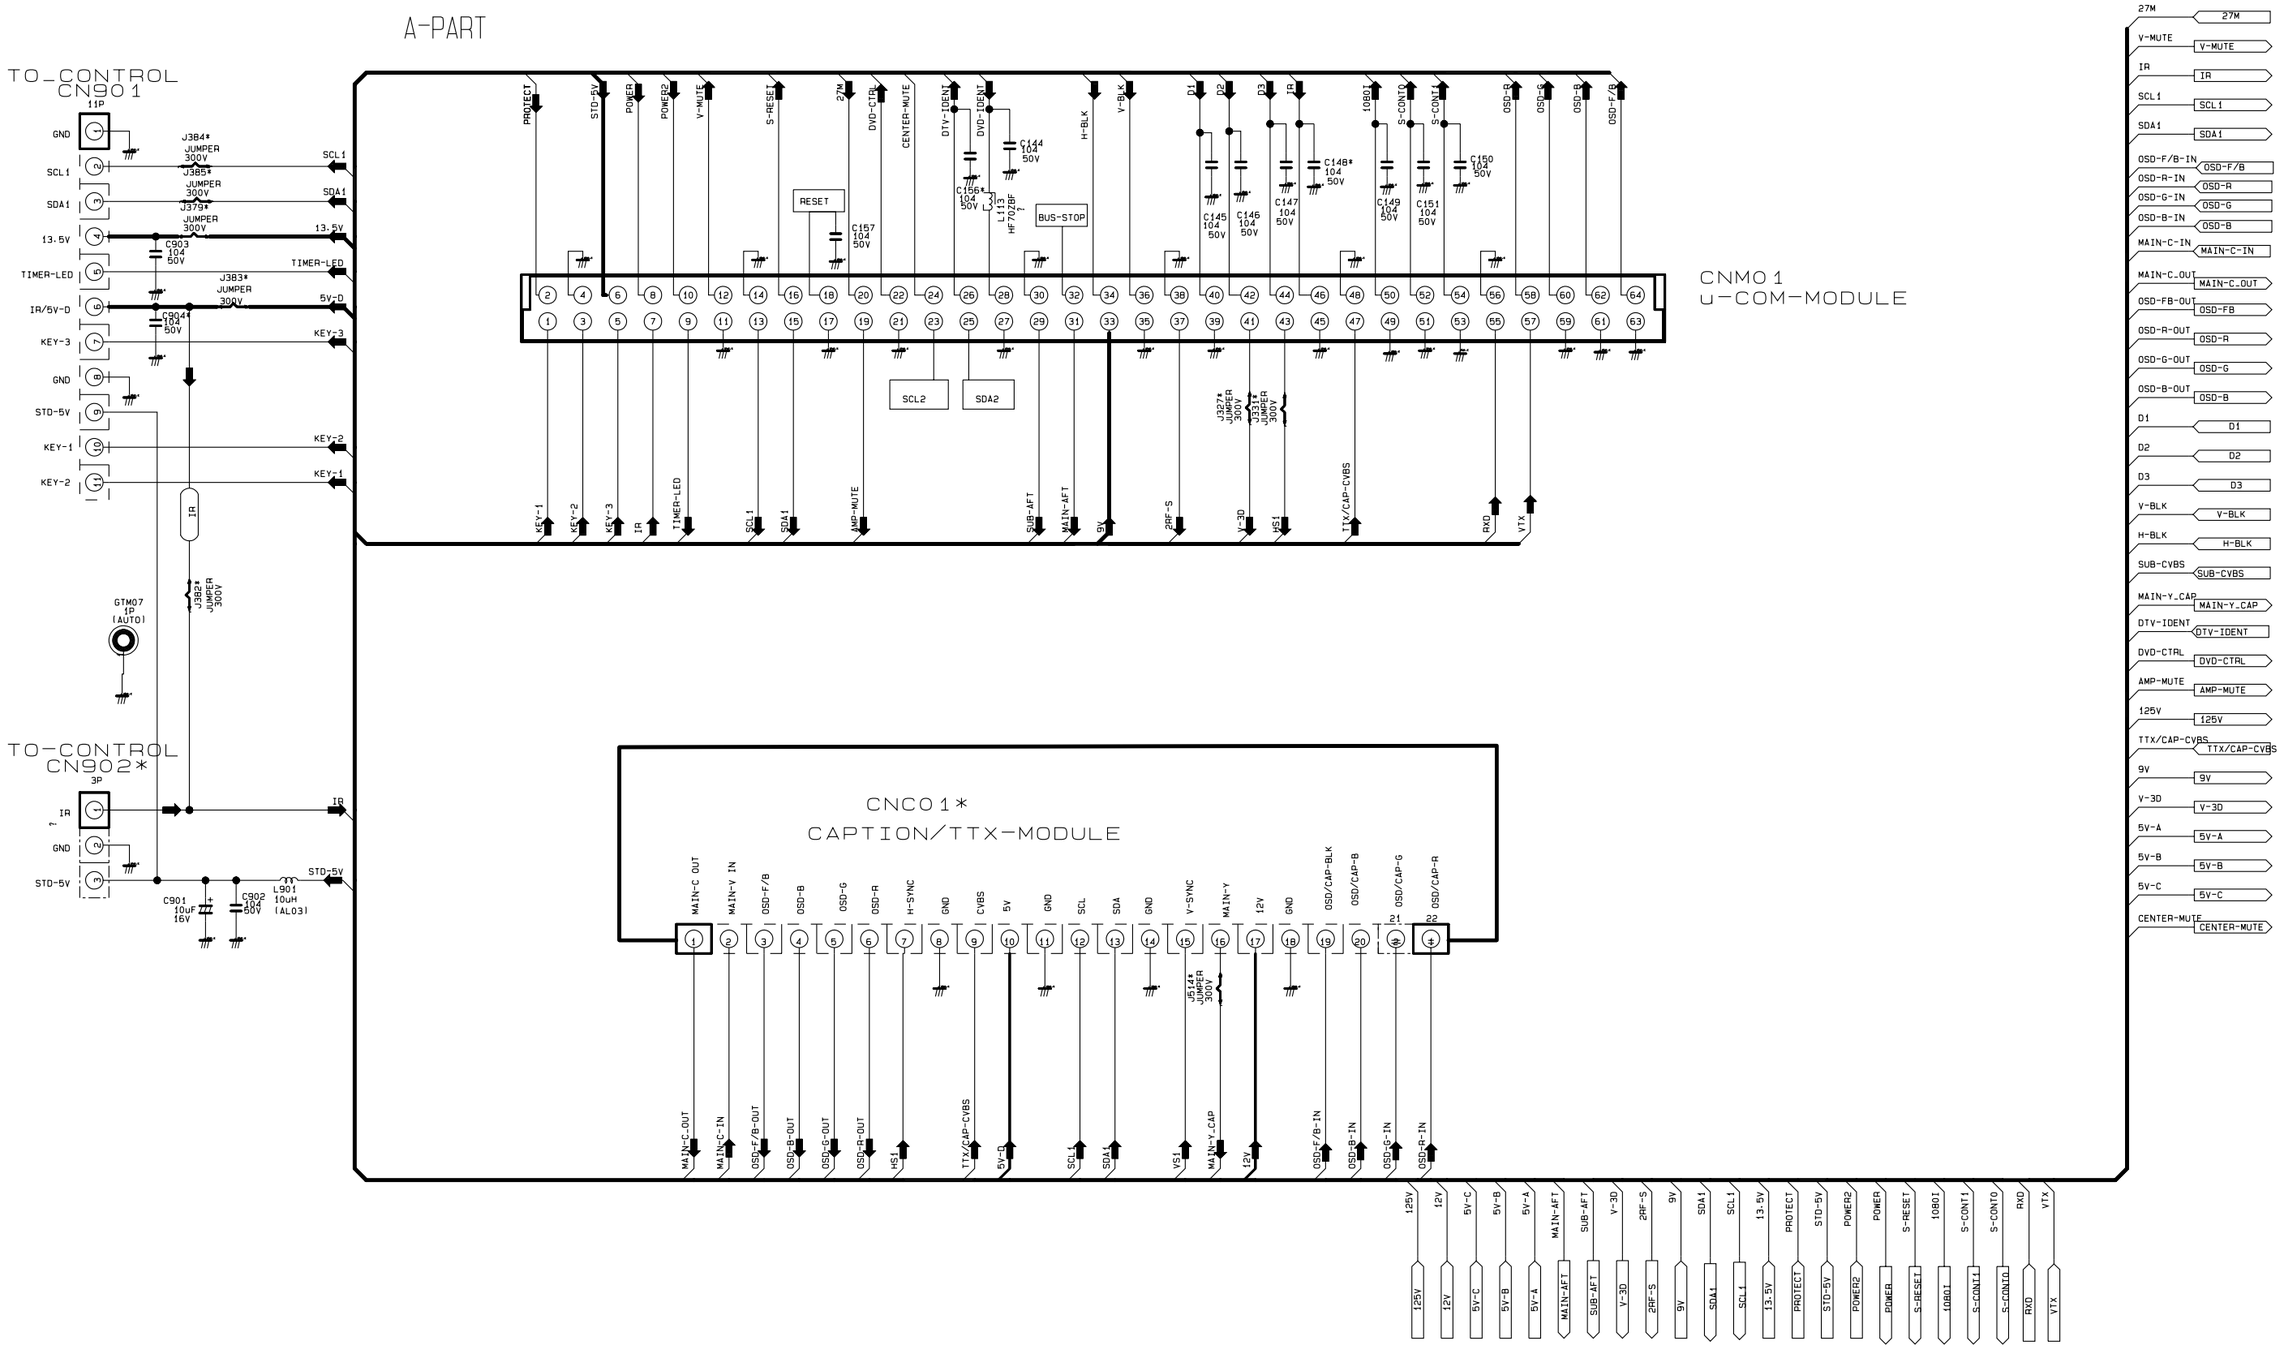

10-2 MAIN 2

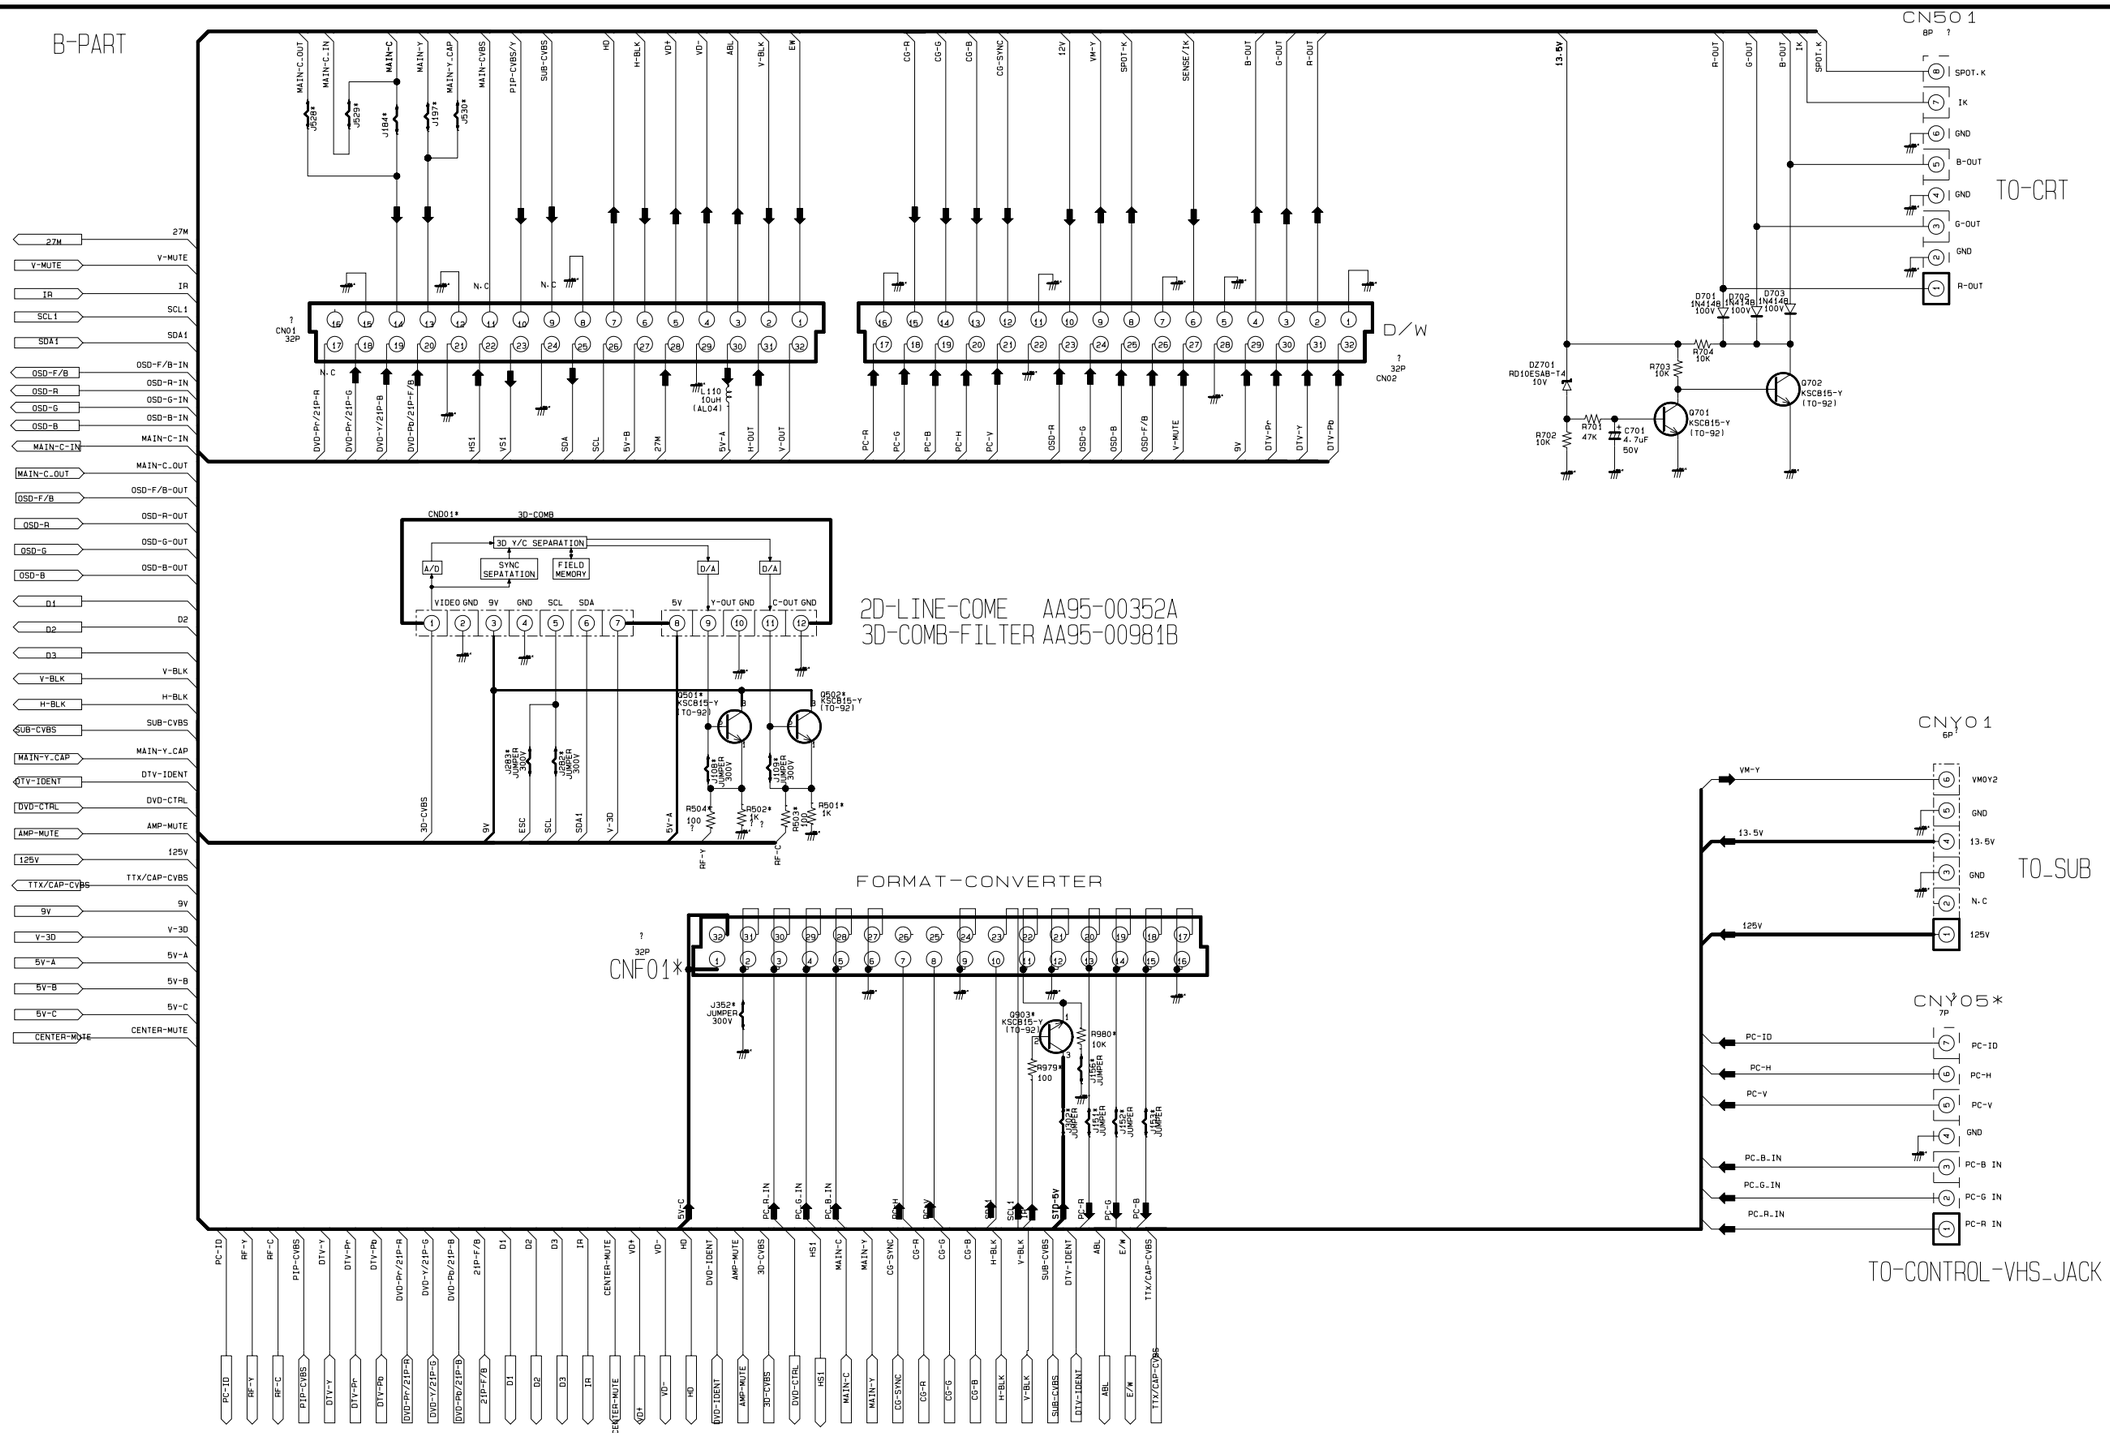
B-PART
CN501
8P
TO-CRT
D/W
CN01
32P
CN02
3D-COMB
2D-LINE-COME AA95-00352A
3D-COMB-FILTER AA95-00981B
FORMAT-CONVERTER
CNF01*
CNY01
6P
TO_SUB
CNY05*
7P
TO-CONTROL-VHS_JACK

10-3 MAIN 3

C-PART

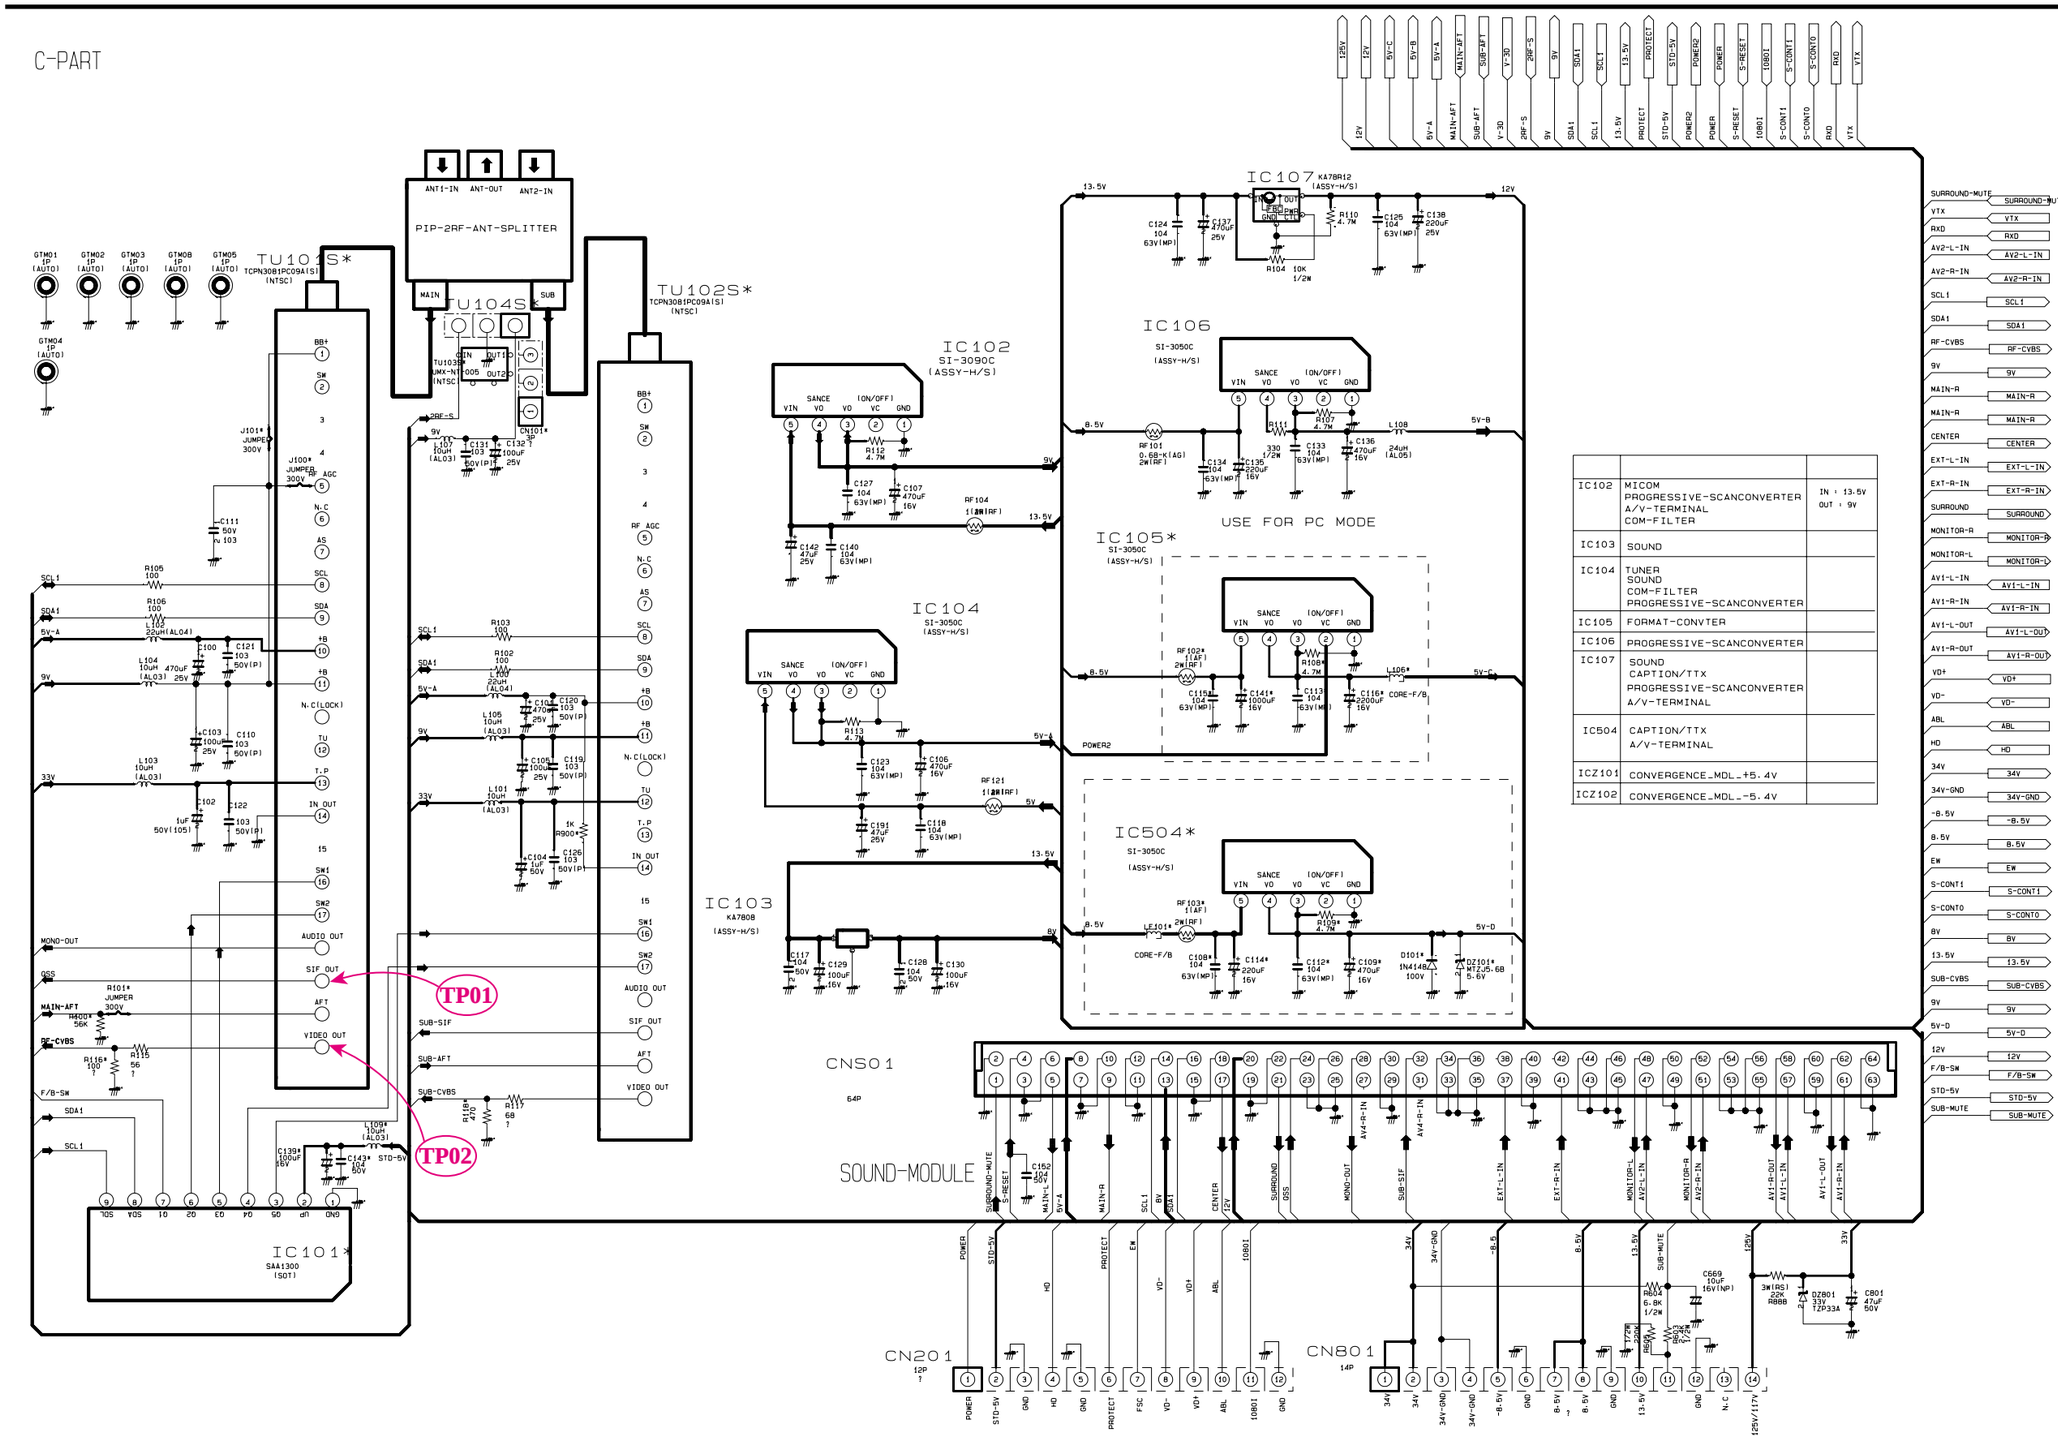

IC102	MICOM PROGRESSIVE-SCANCONVERTER A/V-TERMINAL COM-FILTER	IN : 13.5V OUT : 9V
IC103	SOUND	
IC104	TUNER SOUND COM-FILTER PROGRESSIVE-SCANCONVERTER	
IC105	FORMAT-CONVTER	
IC106	PROGRESSIVE-SCANCONVERTER	
IC107	SOUND CAPTION/TTX PROGRESSIVE-SCANCONVERTER A/V-TERMINAL	
IC504	CAPTION/TTX A/V-TERMINAL	
ICZ101	CONVERGENCE_MDL_+5.4V	
ICZ102	CONVERGENCE_MDL_-5.4V	

10-4 MAIN 4

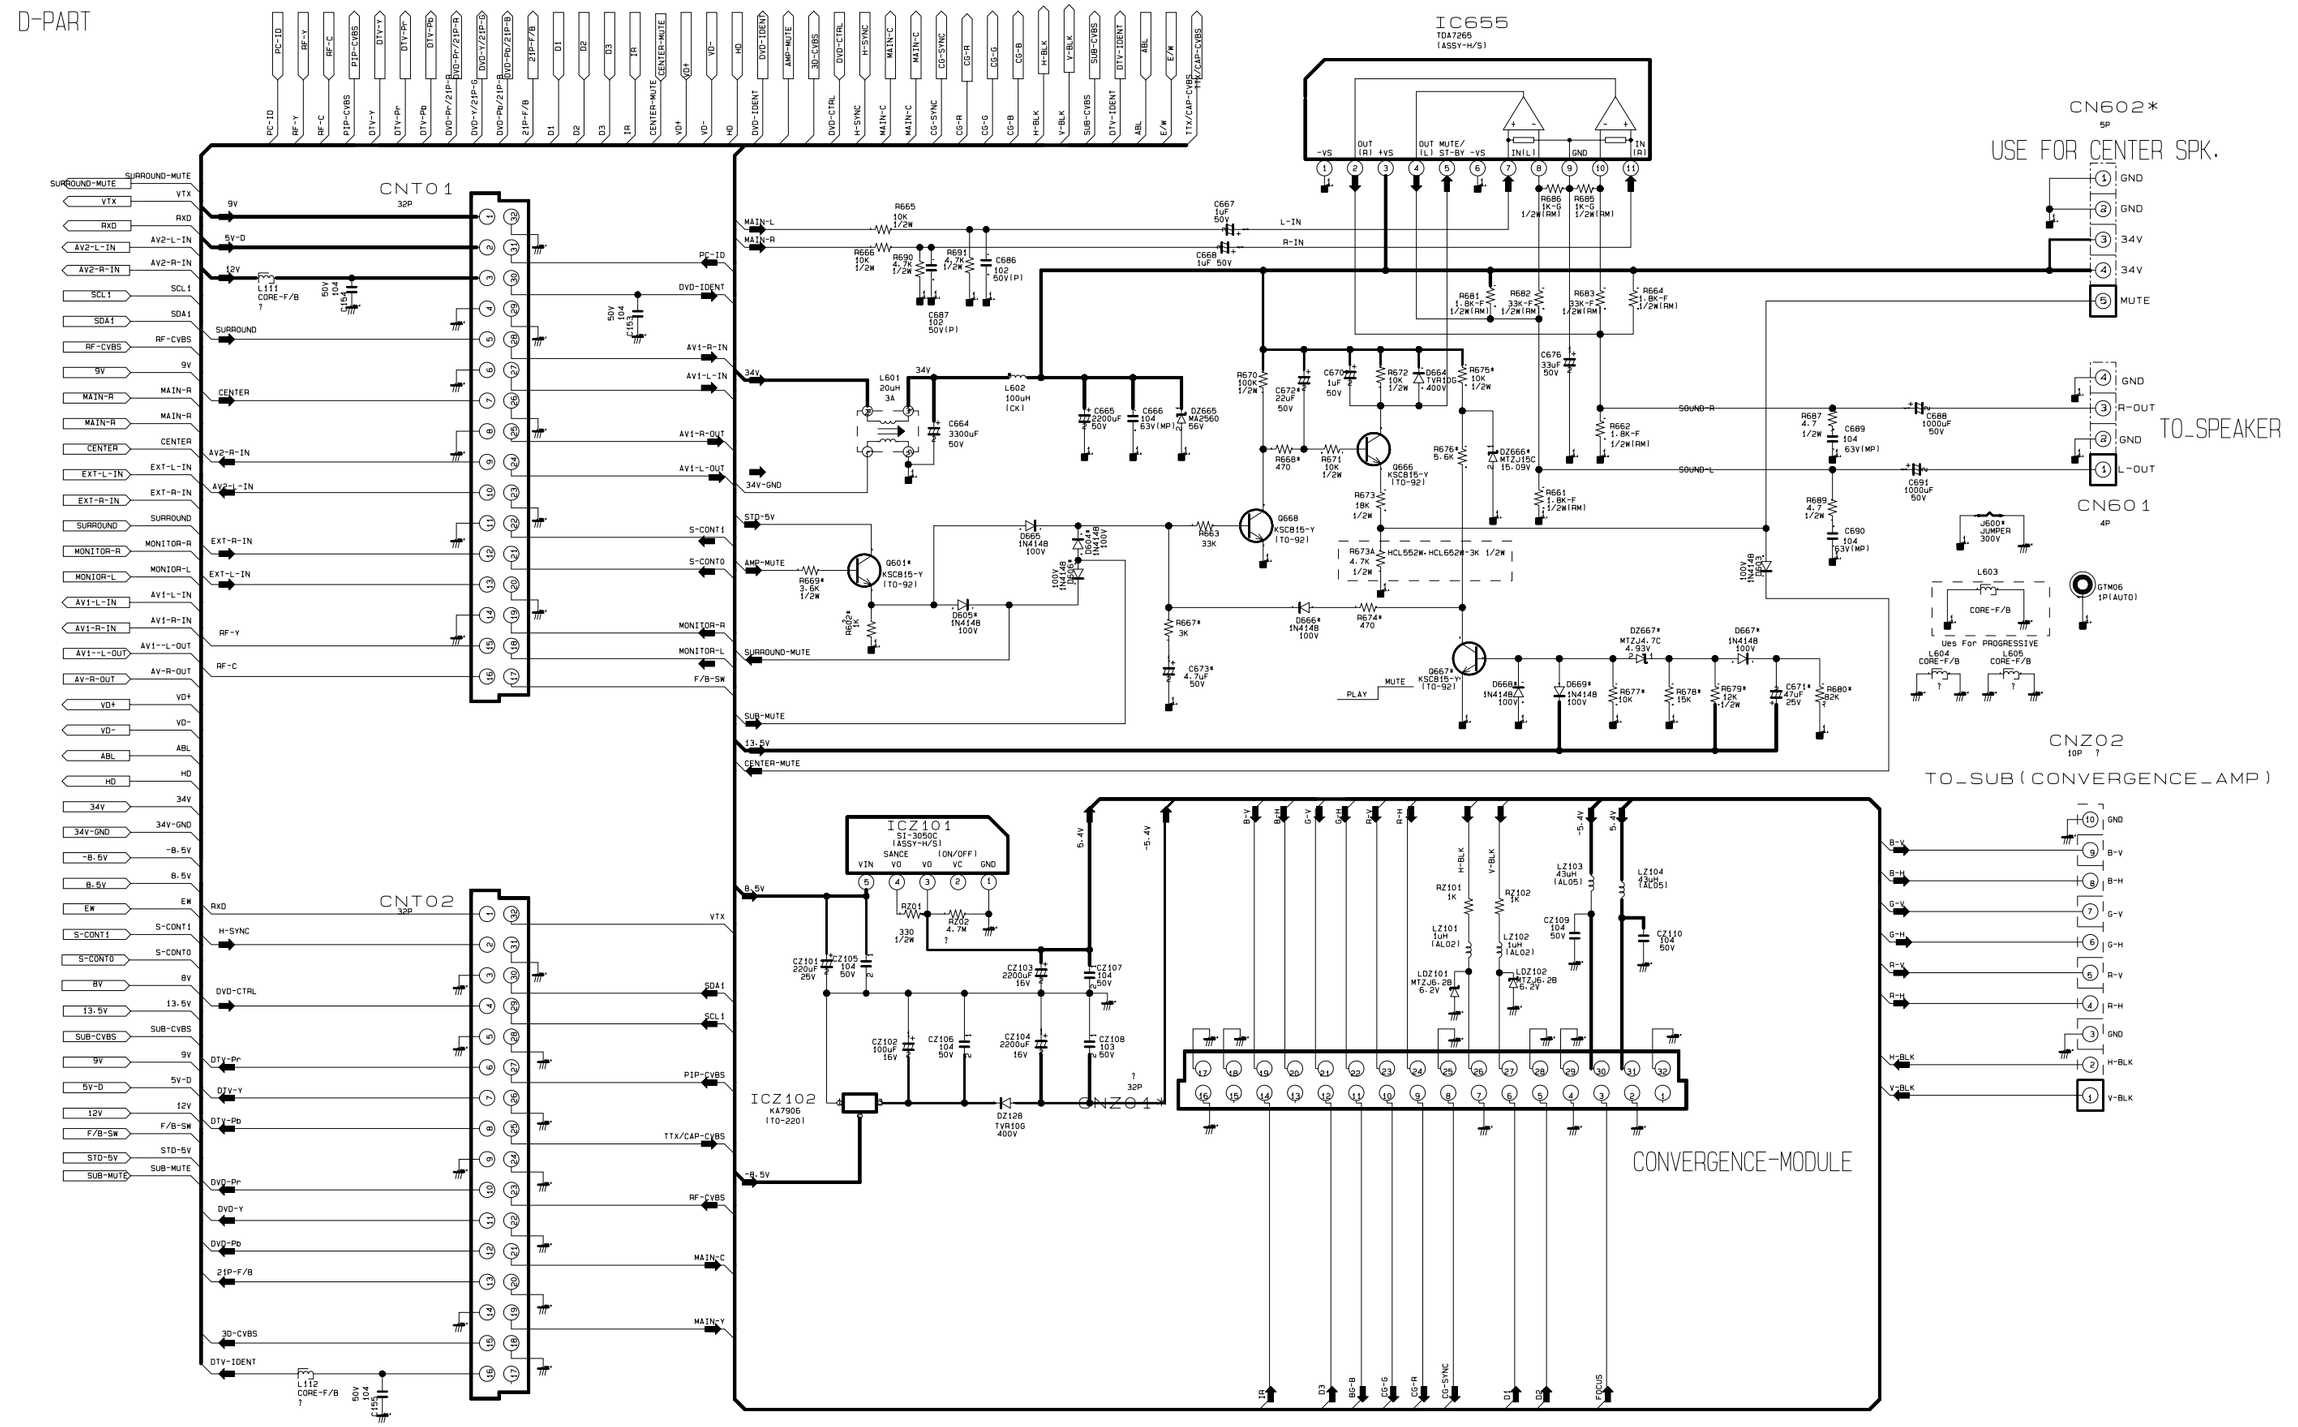
D-PART
IC655
TDA7265
(ASSY-H/S)
CN602*
5P
USE FOR CENTER SPK.
GND
GND
3.4V
3.4V
MUTE
CN601
4P
TO_SPEAKER
R-OUT
L-OUT
CNZ02
10P ?
TO_SUB(CONVERGENCE_AMP)
CNT01
32P
CNT02
32P
CONVERGENCE-MODULE
ICZ101
SI-3050C
(ASSY-H/S)
ICZ102
KA7906
(TO-220)
CNZ01
32P
PC-ID
RF-Y
RF-C
PIP-CVBS
DTV-Y
DTV-Pr
DTV-Pb
DVD-Pr/21P-R
DVD-Y/21P-G
DVD-Pb/21P-B
21P-F/B
D1
D2
D3
IR
CENTER-MUTE
VD+
VD-
HD
DVD-IDENT
AMP-MUTE
3D-CVBS
DVD-CTRL
H-SYNC
MAIN-C
MAIN-C
CG-SYNC
CG-R
CG-G
CG-B
H-BLK
V-BLK
SUB-CVBS
DTV-IDENT
ABL
E/W
TTX/CAP-CVBS
SURROUND-MUTE
VTX
RXD
AV2-L-IN
AV2-R-IN
SCL1
SDA1
RF-CVBS
9V
MAIN-R
CENTER
EXT-L-IN
EXT-R-IN
SURROUND
MONITOR-R
MONIOR-L
AV1-L-IN
AV1-R-IN
AV1--L-OUT
AV-R-OUT
VD+
VD-
ABL
HD
34V
34V-GND
-8.5V
8.5V
EW
S-CONT1
S-CONT0
8V
13.5V
SUB-CVBS
5V-D
12V
F/B-SW
STD-5V
SUB-MUTE
MAIN-L
MAIN-R
L-IN
R-IN
SOUND-R
SOUND-L
PLAY
MUTE
Ues For PROGRESSIVE
CORE-F/B
GTM06
1P(AUTO)
J600*
JUMPER
300V
L603
L604
L605
L111
L112
L601
L602
20uH
3A
100uH
(CK)
HCL552W-HCL652W-3K 1/2W
Q601*
KSC815-Y
(TO-92)
Q666
KSC815-Y
(TO-92)
Q667*
KSC815-Y
(TO-92)
Q668
KSC815-Y
(TO-92)
DZ128
TVR10G
400V
DZ665
MA2S60
55V
DZ666*
MTZJ15C
15.09V
DZ667*
MTZJ4.7C
4.93V
LZ101
1uH
(AL02)
LZ102
1uH
(AL02)
LZ103
43uH
(AL05)
LZ104
43uH
(AL05)
LDZ101
MTZJ6.2B
6.2V
LDZ102
MTZJ6.2B
6.2V
SIGNAL
STD-5V
AMP-MUTE
SURROUND-MUTE
SUB-MUTE
13.5V
CENTER-MUTE
-8.5V
5.4V
-5.4V
B-V
B-H
G-V
G-H
R-V
R-H
H-BLK
V-BLK
SDA1
SCL1
PIP-CVBS
TTX/CAP-CVBS
RF-CVBS
MAIN-C
MAIN-Y
F/B-SW
S-CONT1
S-CONT0
MONITOR-R
MONITOR-L
AV1-R-IN
AV1-L-IN
AV1-R-OUT
AV1-L-OUT
AV2-R-IN
AV2-L-IN
EXT-R-IN
EXT-L-IN
CENTER
SURROUND
DVD-IDENT
DVD-CTRL
VTX
RXD
H-SYNC
9V
5V-D
12V
SUB-CVBS
DTV-Pr
DTV-Y
DTV-Pb
DVD-Pr
DVD-Y
DVD-Pb
21P-F/B
3D-CVBS
DTV-IDENT

10-5 MICOM

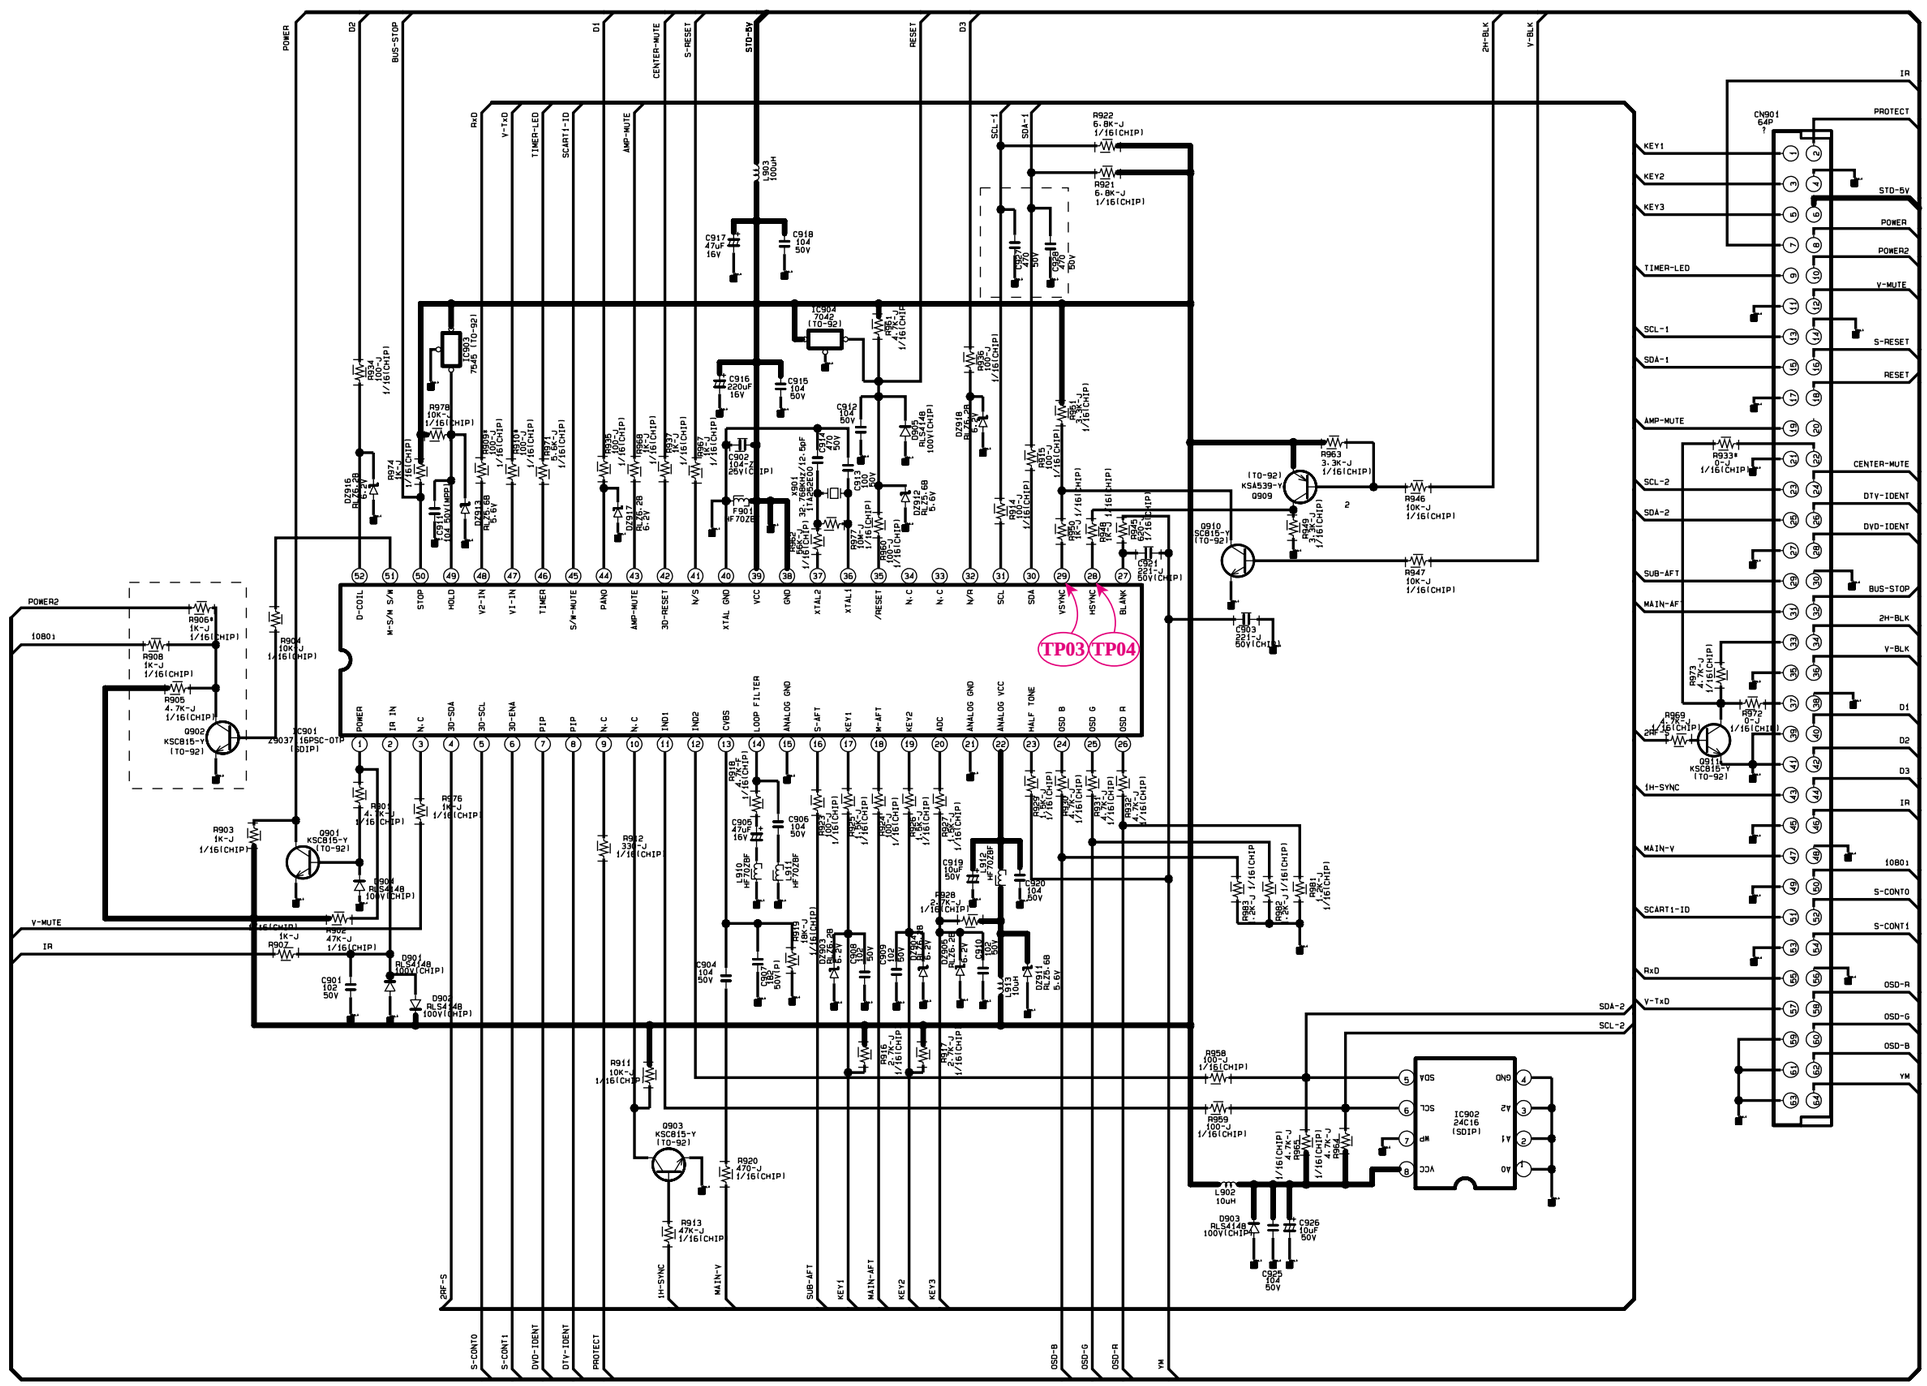
TP03
TP04
POWER
D2
BUS-STOP
D1
CENTER-MUTE
S-RESET
STD-5V
RESET
D3
2H-BLK
V-BLK
RxD
Y-TxD
TIMER-LED
SCART1-ID
AMP-MUTE
SCL-1
SDA-1
IR
PROTECT
KEY1
KEY2
KEY3
SCL-2
SDA-2
SUB-AFT
MAIN-AF
1H-SYNC
MAIN-V
10801
S-CONT0
S-CONT1
DVD-IDENT
DTV-IDENT
OSD-R
OSD-G
OSD-B
YM
V-MUTE
IC902
24C16
(SDIP)
IC901
Z9037 (6PSC-01P
(SDIP)

10-6 POWER

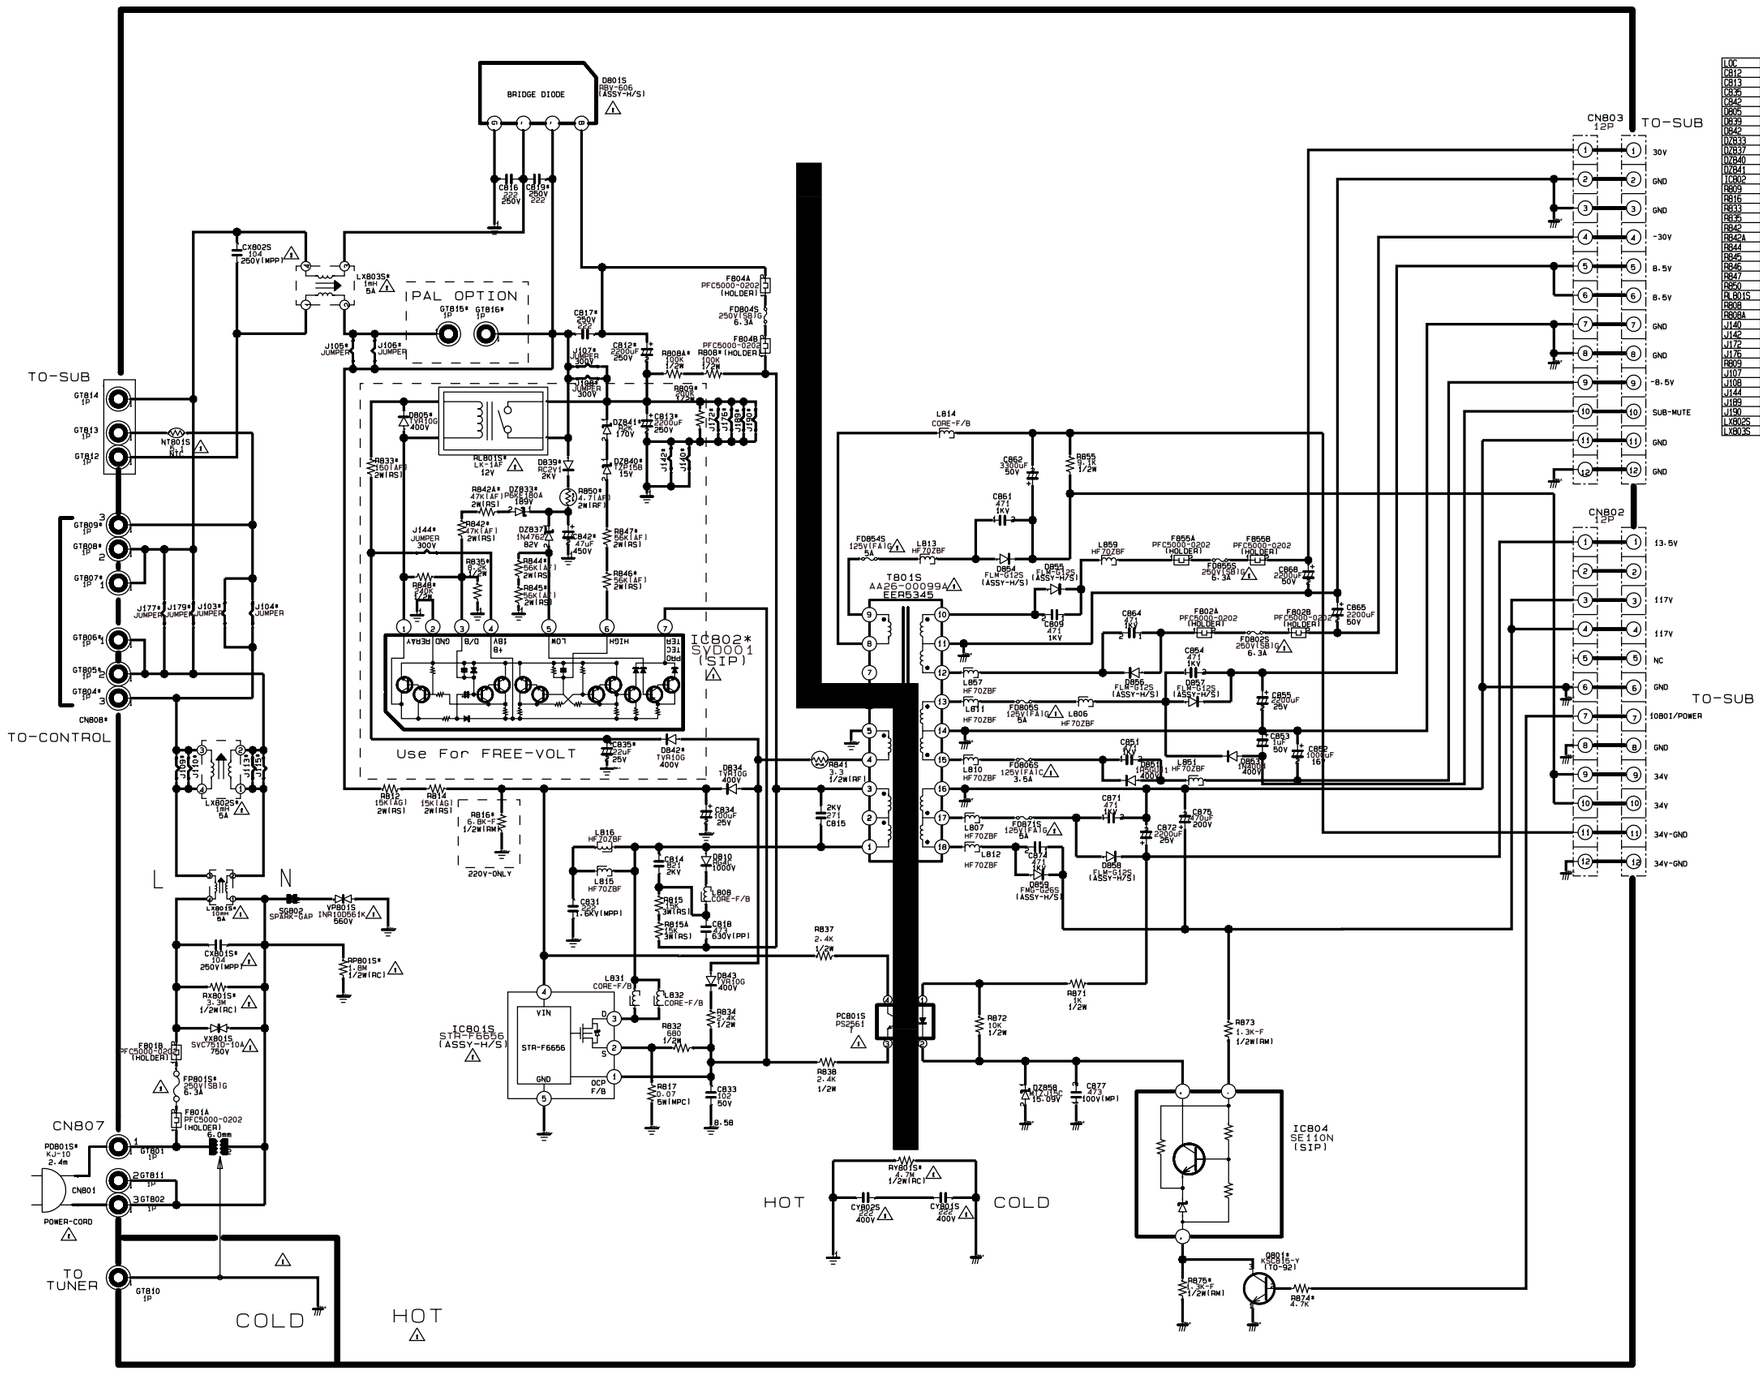

LOC	FREE	220V	120V
C812	2401-000701 2200UF 25OV	2401-003465 680UF 450V	2401-000701 2200UF 25OV
C813	2401-000701 2200UF 25OV	DELETE	2401-000701 2200UF 25OV
C835	2401-000030 22UF 25V	DELETE	DELETE
C842	2401-003370 47UF 450V	DELETE	DELETE
D805	0402-000646 TVR10G	DELETE	DELETE
D839	0402-000243 RC2-V1	DELETE	DELETE
D842	0402-000646 TVR10G	DELETE	DELETE
DZ833	0406-001007 PDC180A	DELETE	DELETE
DZ837	0403-000170 1N4762	DELETE	DELETE
DZ840	0403-001033 MAZ4R0	DELETE	DELETE
DZ841	0403-000631 RZK 170V	DELETE	DELETE
IC802	AA13-00013A (IC-HYBRID SVD001	DELETE	DELETE
R809	2001-000002 200K 1/2W(CARBON)	DELETE	DELETE
R816	2004-004029 10K 1/2W-F(METAL)	2004-004029 10K 1/2W-F(METAL)	DELETE
R833	2003-001024 150 2W(METAL)	DELETE	DELETE
R835	2001-001188 8.2K 1/2W(CARBON)	DELETE	DELETE
R842	2003-001040 47K 2W(METAL)	DELETE	DELETE
R842A	2003-001040 47K 2W(METAL)	DELETE	DELETE
R844	2003-002020 56K 2W(METAL)	DELETE	DELETE
R845	2003-002020 56K 2W(METAL)	DELETE	DELETE
R846	2003-002020 56K 2W(METAL)	DELETE	DELETE
R847	2003-002020 56K 2W(METAL)	DELETE	DELETE
R850	2008-001075 4.7 2W F(FUSIBLE)	DELETE	DELETE
RLB01S	2501-001040 RELAY-POWER 12VDC	DELETE	DELETE
R808	2001-000085 100K 1/2W(CARBON)	2001-000002 200K 1/2W(CARBON)	2001-000085 100K 1/2W(CARBON)
R808A	2001-000085 100K 1/2W(CARBON)	2001-000002 200K 1/2W(CARBON)	2001-000085 100K 1/2W(CARBON)
J140	3812-000219 JUMPER	DELETE	3812-000219 JUMPER
J142	3812-000219 JUMPER	DELETE	3812-000219 JUMPER
J172	DELETE	3812-000219 JUMPER	DELETE
J176	DELETE	3812-000219 JUMPER	DELETE
R809	2001-000002 200K 1/2W(CARBON)	DELETE	2001-000002 200K 1/2W(CARBON)
J107	DELETE	DELETE	3812-000219 JUMPER
J108	DELETE	DELETE	3812-000219 JUMPER
J144	3812-000219 JUMPER	DELETE	DELETE
J189	DELETE	3812-000219 JUMPER	DELETE
J190	DELETE	3812-000219 JUMPER	DELETE
LYB02S	AA29-30002M 1MH 5A	AA29-30002F 6MH 2.5A	AA29-30002M 1MH 5A
LYB03S	AA29-30002M 1MH 5A	AA29-00008A 6MH 3A	AA29-30002M 1MH 5A

10-7 SOUND

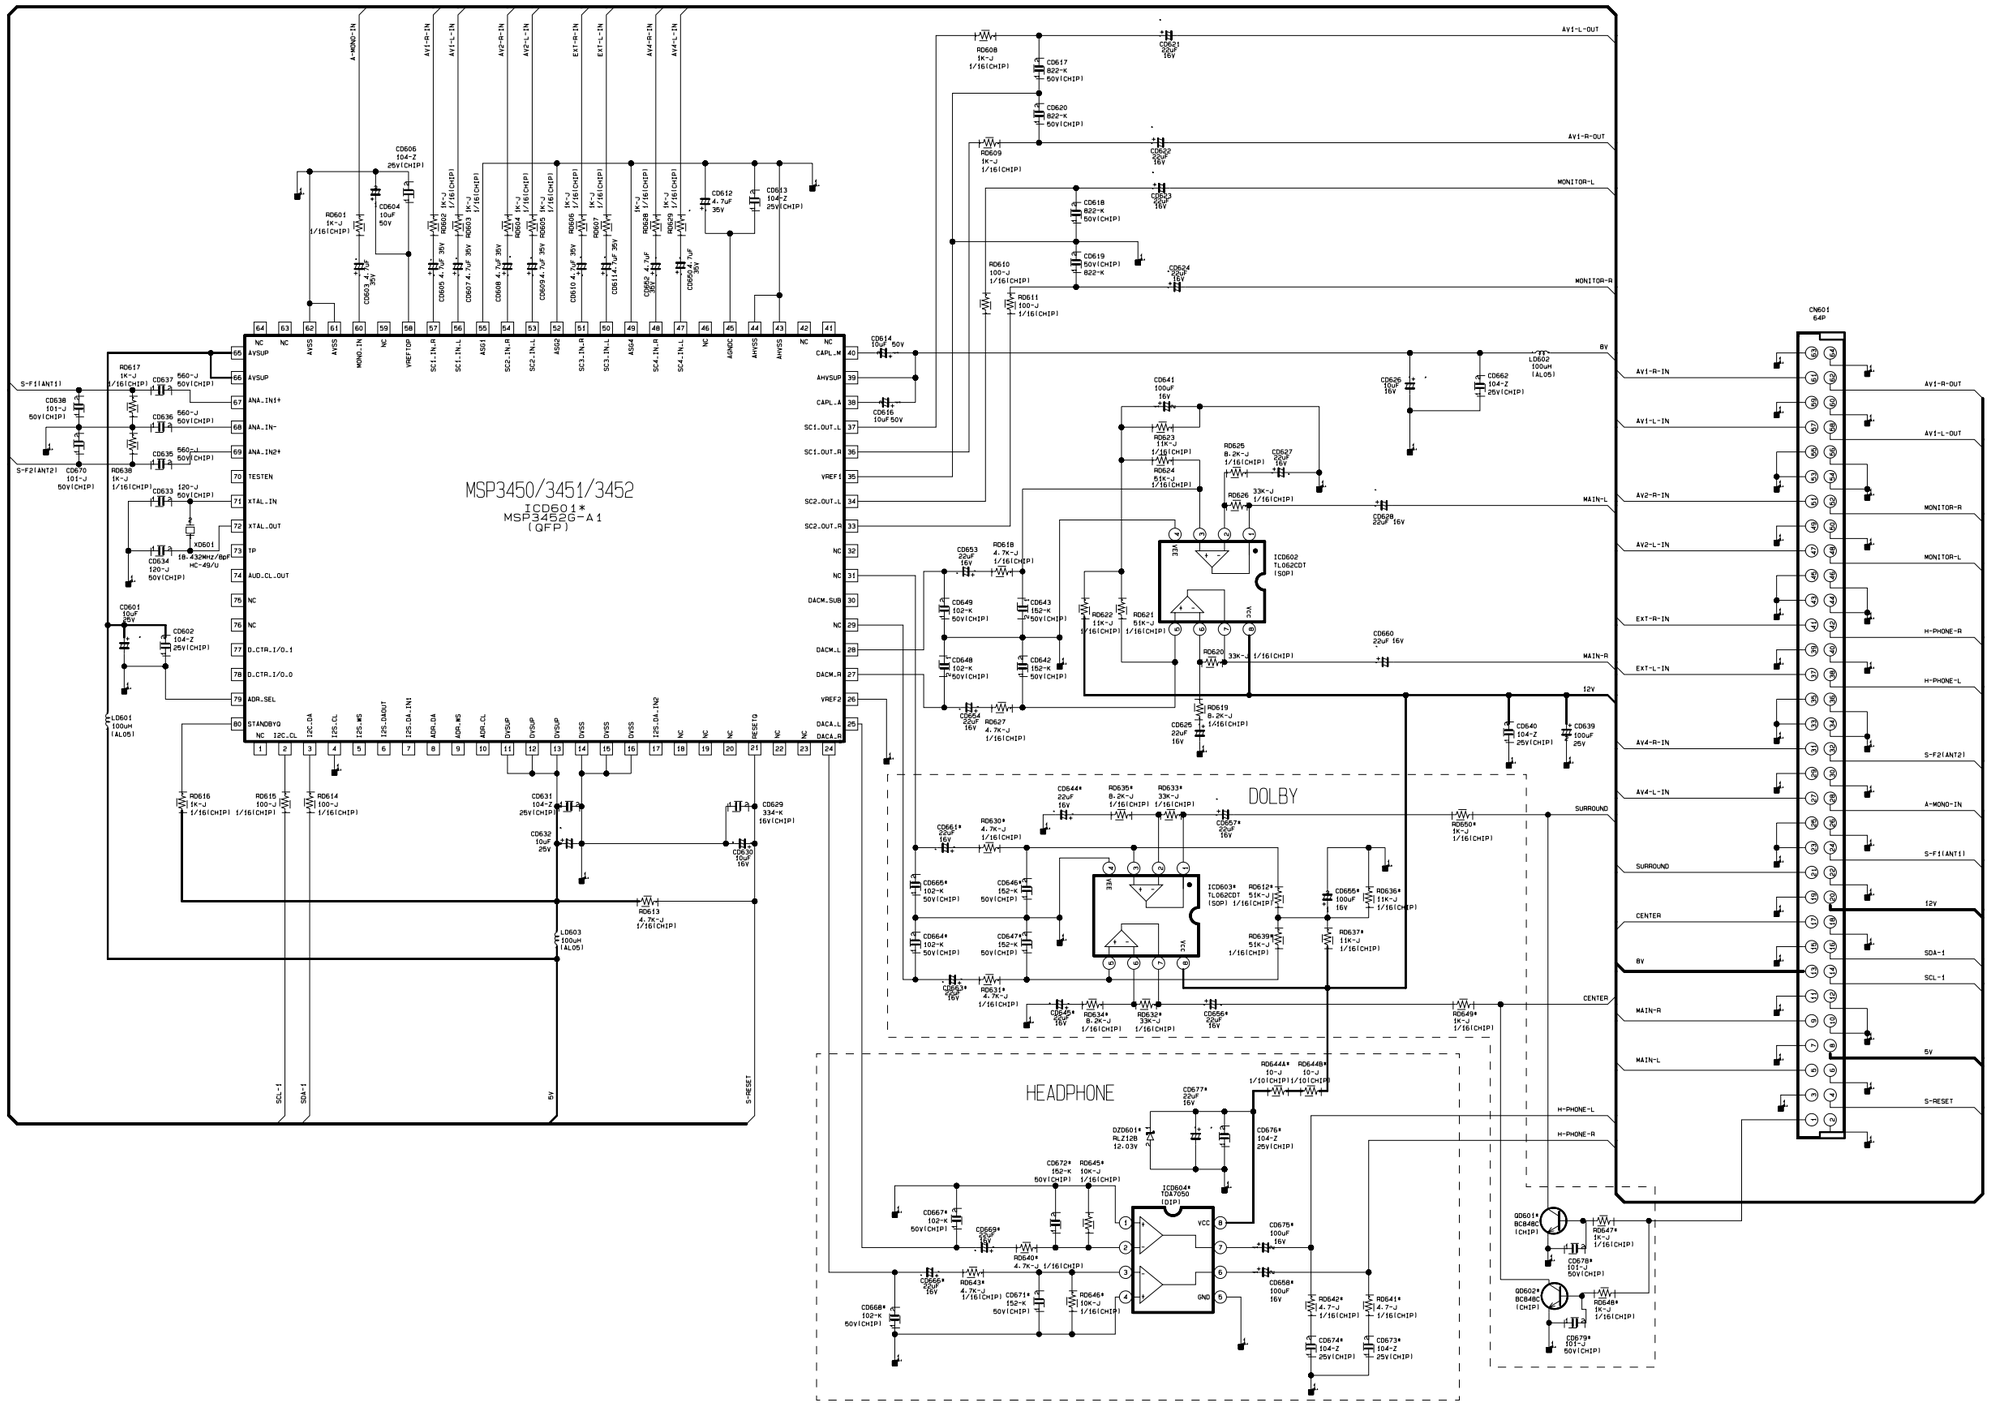
MSP3450/3451/3452
ICD601*
MSP3452G-A1
(QFP)
DOLBY
HEADPHONE
CN601
64P
AV1-L-OUT
AV1-R-OUT
MONITOR-L
MONITOR-R
8V
MAIN-L
MAIN-R
12V
SURROUND
CENTER
5V
AV1-R-IN
AV1-L-IN
AV2-R-IN
AV2-L-IN
EXT-R-IN
EXT-L-IN
AV4-R-IN
AV4-L-IN
H-PHONE-R
H-PHONE-L
A-MONO-IN
S-F1(ANT1)
S-F2(ANT2)
SDA-1
SCL-1
S-RESET

10-8 CRT

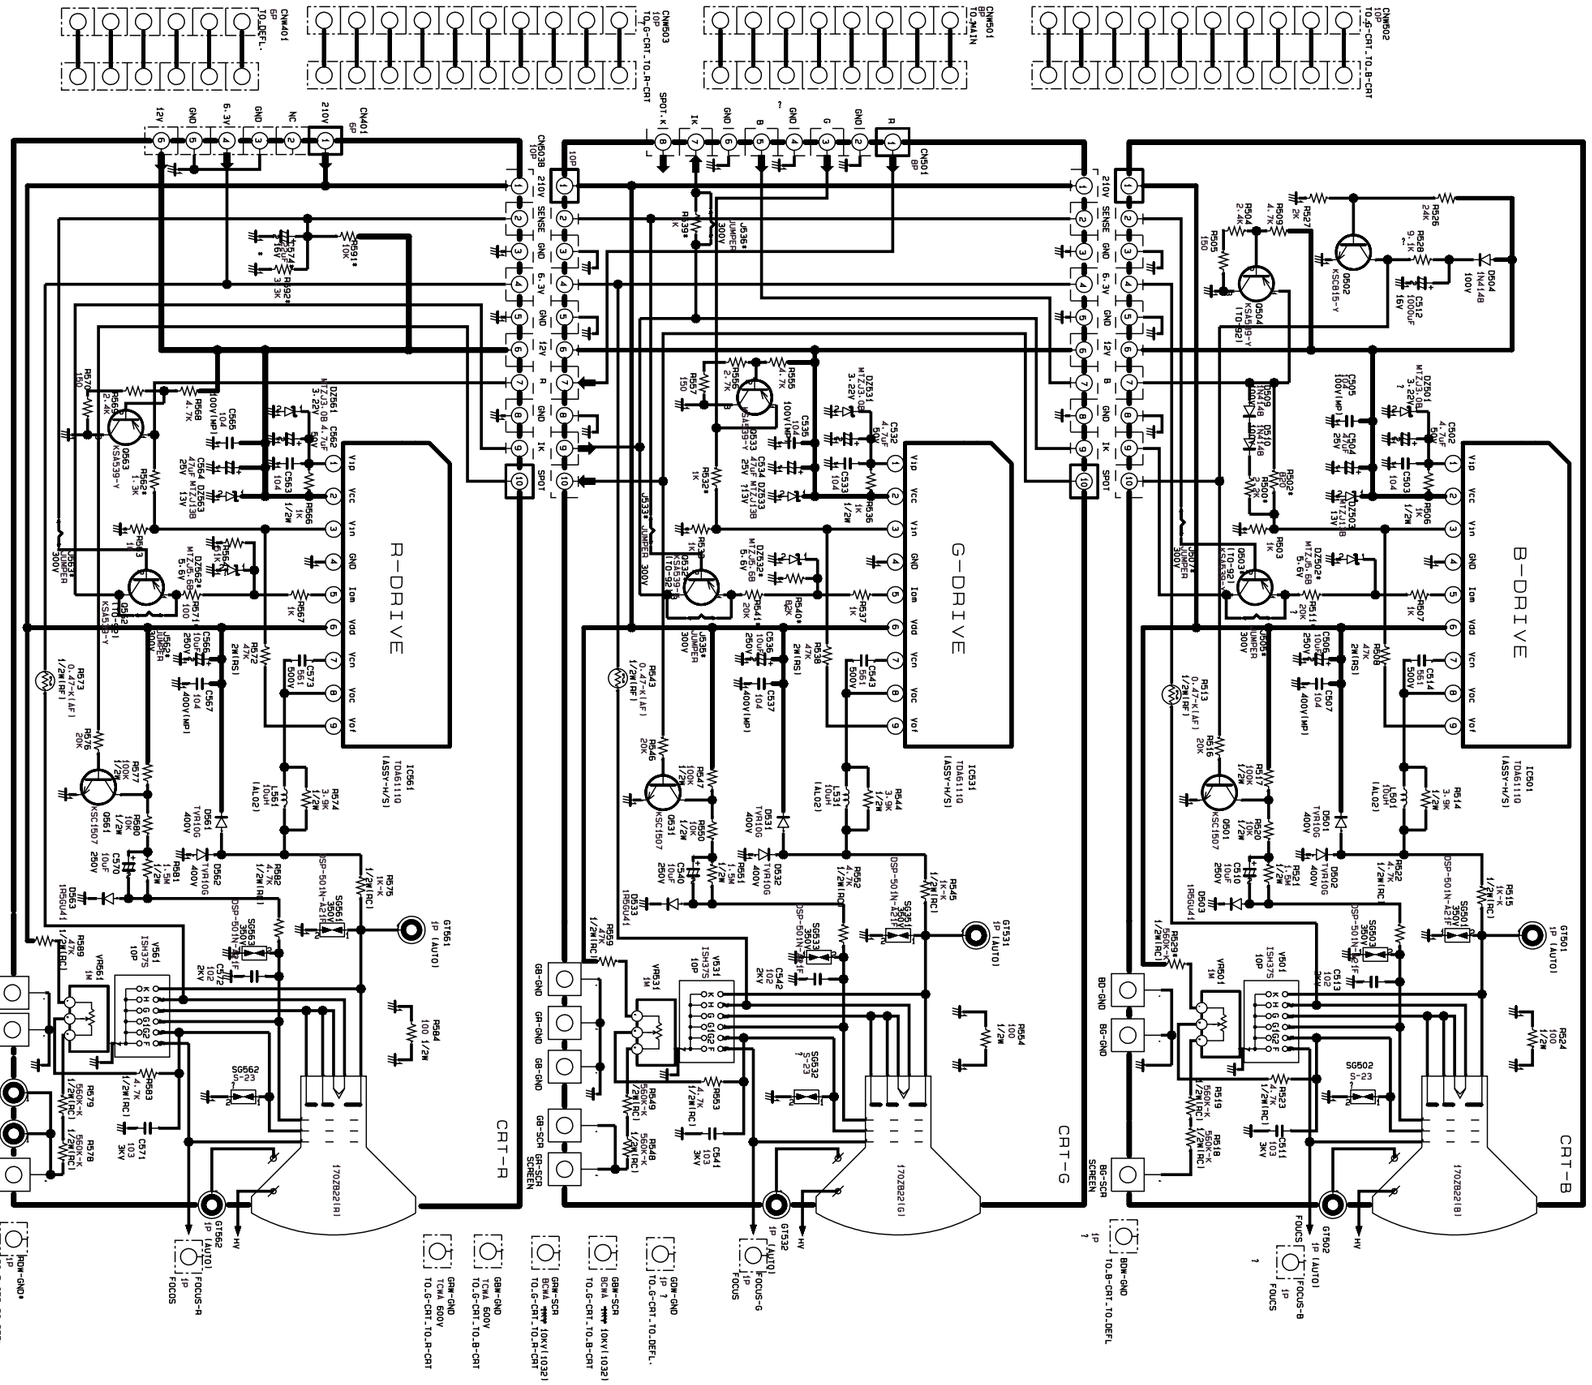
R-DRIVE
G-DRIVE
B-DRIVE
CRT-R
CRT-G
CRT-B
CN401
CN503
CN501
CN502
CN601
CN501
IC561
IC531
IC501
TDA6110
(ASSY-H/S)
J535
JUMPER
J536
JUMPER
R539
1K
R591*
10K
R571
100
R564
51K
R563
1K
R562*
1.3K
R566
1K
R567
1K
R572
2.2K
R573
0.47~1K(AF)
R574
3.9K
R576
20K
R577
100K
R580
10K
R581
1.5M
R582
4.7K
R583
4.7K
R584
100
R589
47K
R578
560K~1M
R579
560K~1M
R549
560K~1M
R548
560K~1M
R513
0.47~1K(AF)
R514
3.9K
R516
20K
R517
100K
R520
100K
R521
1.5M
R522
4.7K
R523
4.7K
R524
100
R519
560K~1M
R518
560K~1M
R501
1K
R502
910
R503
1K
R504
4.7K
R505
150
R506
1K
R507
1K
R508
2.2K
R509
4.7K
R510
1K
R511
20K
R512
100K
R515
1K~K
R527
2K
R528
2.4K
R529
560K
R530
560K
R531
560K
R532*
1K
R533
1K
R534
1K
R535*
1K
R536
1K
R537
1K
R538
2.2K
R539
560K
R540*
82K
R541
20K
R542
100K
R543
0.47~1K(AF)
R544
3.9K
R545
1K~K
R546
20K
R547
100K
R548
2.2K
R549
560K~1M
R550
1.5M
R551
1.5M
R552
4.7K
R553
4.7K
R554
100
R555
4.7K
R556
150
R557
2.4K
R558
4.7K
R559
150
R560
2.4K
R561
4.7K
R562
2.4K
R563
1K
R564
1K
R565
4.7K
R566
150
R567
2.4K
R568
4.7K
C565
104
C564
47UF
C563
104
C562
4.7UF
C561
3.22
C566
104
C567
104
C568
104
C569
104
C570
10UF
C571
103
C572
102
C573
104
C574
104
C575
104
C576
104
C577
104
C578
104
C579
104
C580
104
C581
104
C582
104
C583
104
C584
104
C585
104
C586
104
C587
104
C588
104
C589
104
C590
104
C591
104
C592
104

10-9 3D COMB

LOCATION	USED'	
JD01	V-SYNC	
JD02	H-SYNC	
JD03	BUS ADDRESS HIGH	
JD04	BUS ADDRESS LOW	
CD40	V-SYNC DELAY	B-LOT
QD40	V-SYNC DELAY	
QD41	V-SYNC DELAY	
RD40	V-SYNC DELAY	
RD41	V-SYNC DELAY	
RD42	V-SYNC DELAY	
RD43	V-SYNC DELAY	

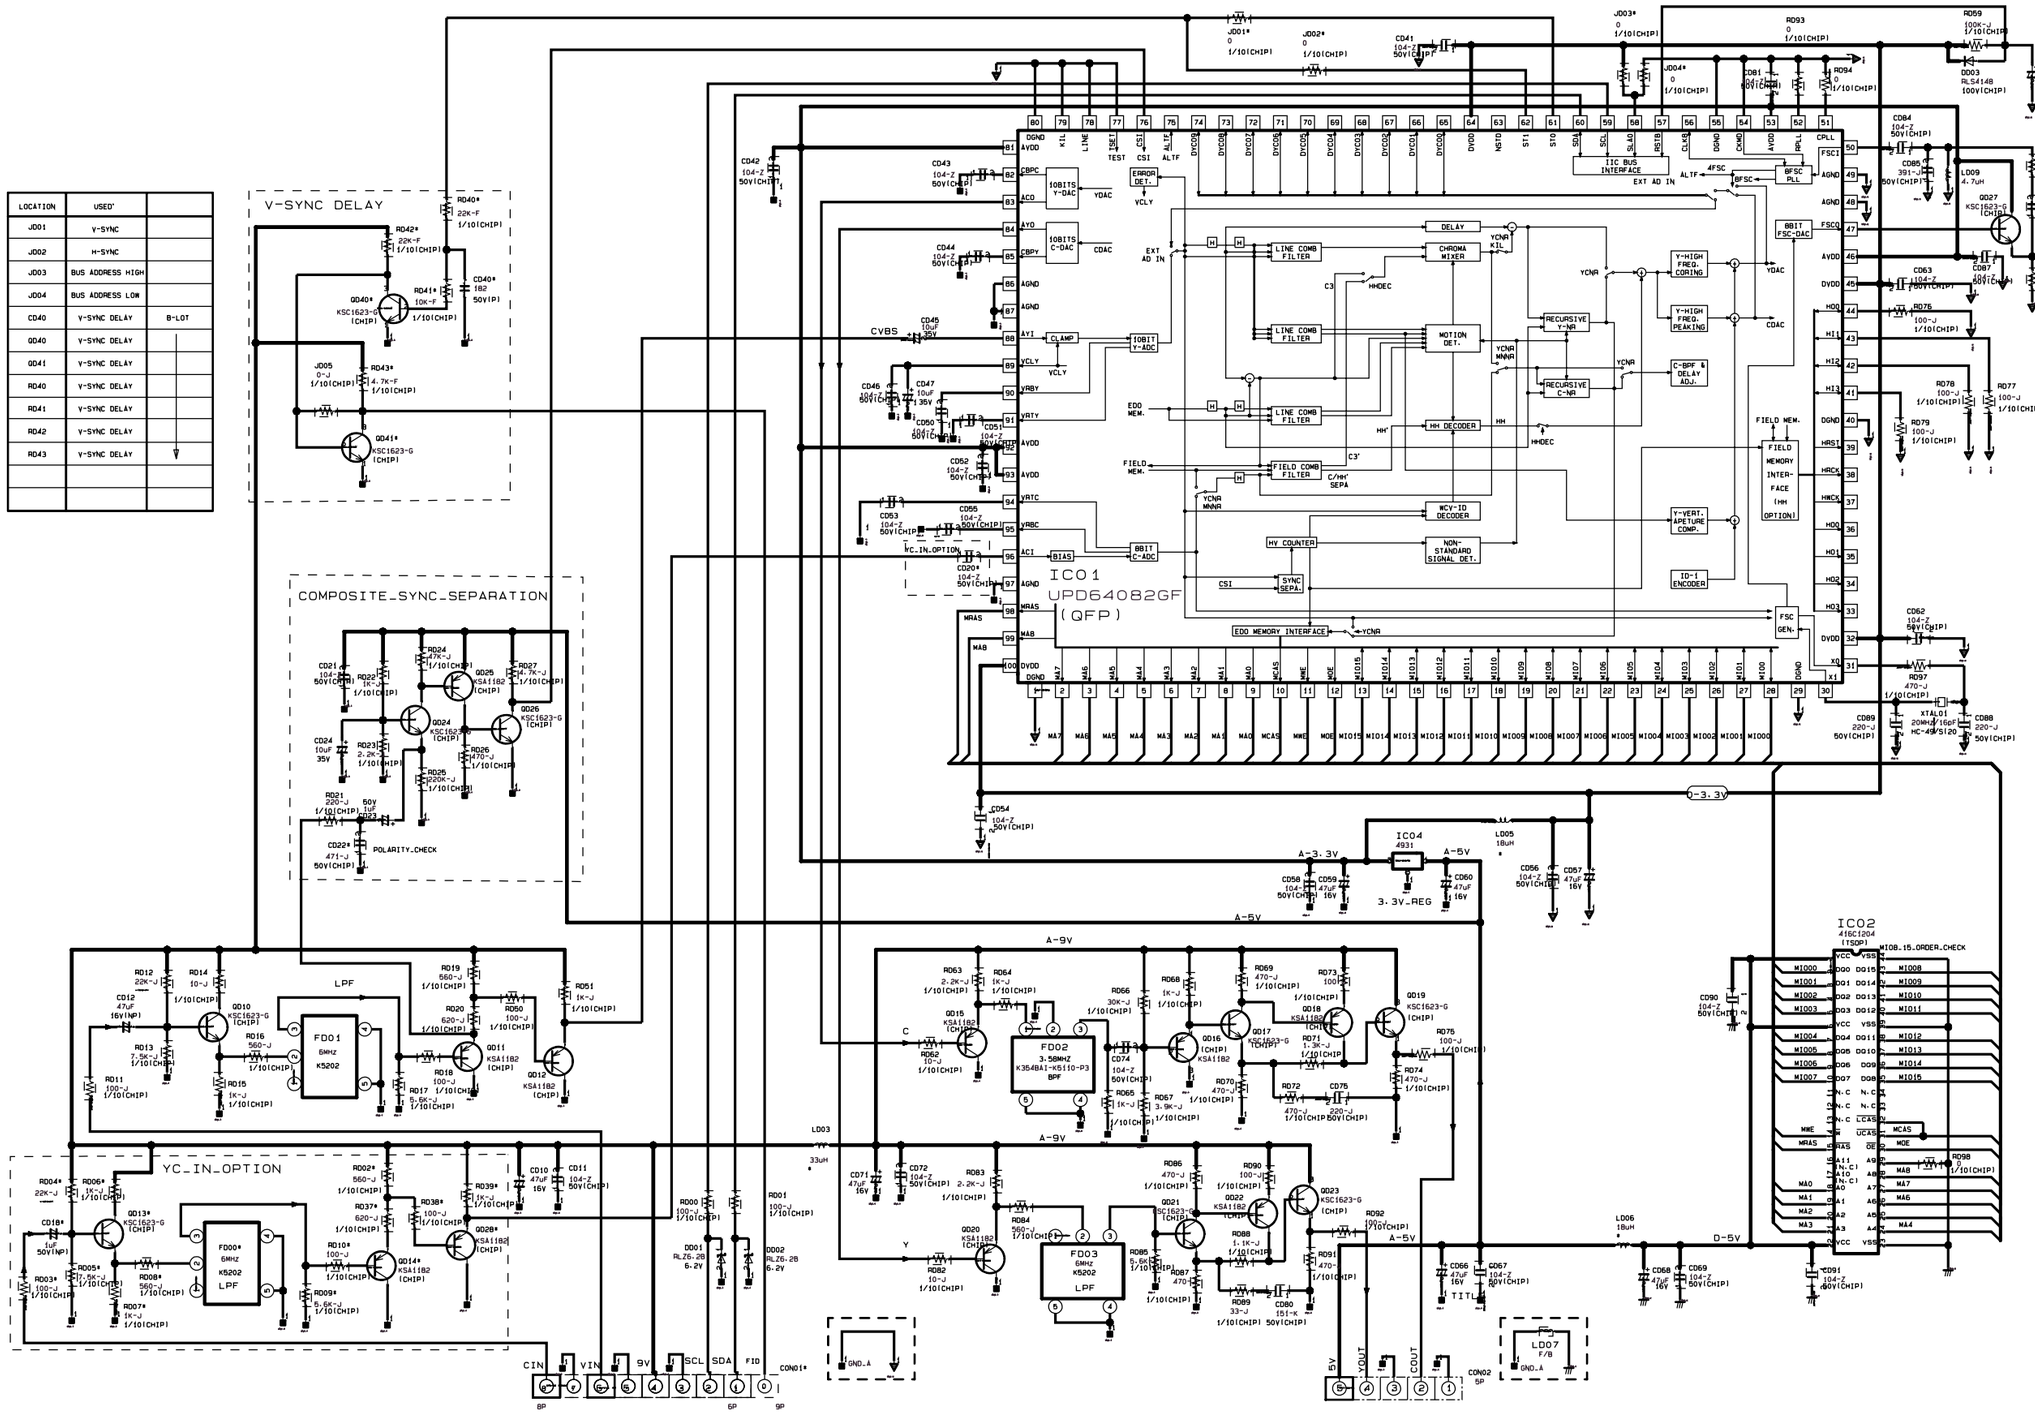

10-10 SUB 1

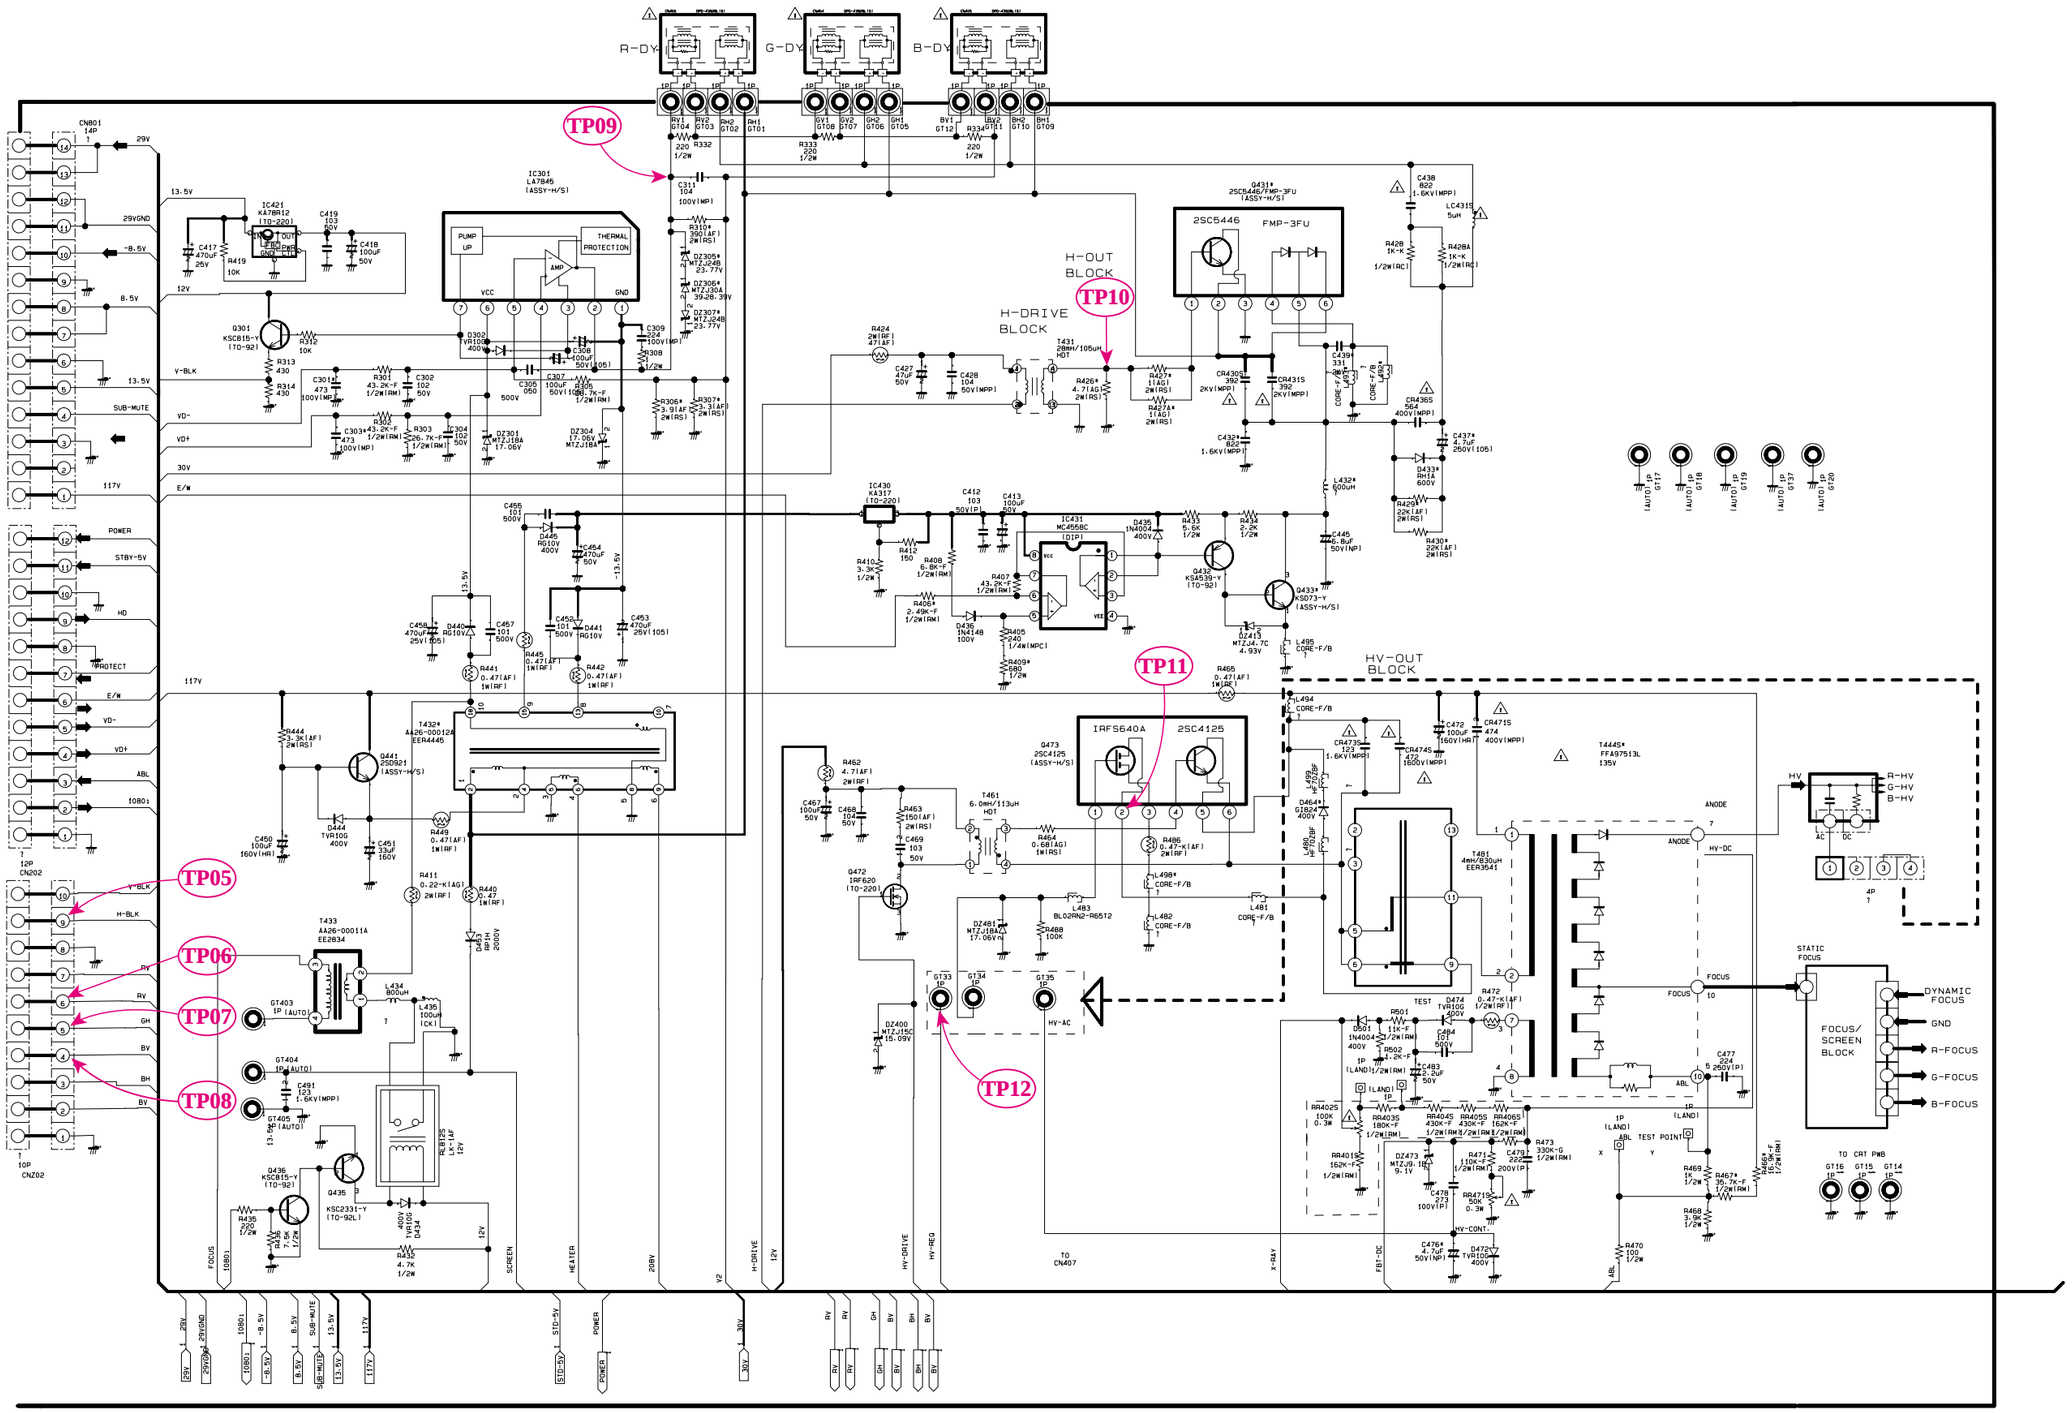
TP09
TP10
TP11
TP12
TP05
TP06
TP07
TP08
R-DY
G-DY
B-DY
H-OUT BLOCK
H-DRIVE BLOCK
HV-OUT BLOCK
2SC5446
FMP-3FU
IRFS640A
2SC4125
CN801 14P
CN202
CN407
29V
29VGND
-8.5V
8.5V
13.5V
12V
117V
30V
V-BLK
H-BLK
SUB-MUTE
POWER
STBY-5V
HD
PROTECT
E/W
VD-
VD+
ABL
108D1
RV
GH
BV
BH
ANODE
HV-DC
FOCUS
STATIC FOCUS
DYNAMIC FOCUS
FOCUS/ SCREEN BLOCK
R-FOCUS
G-FOCUS
B-FOCUS
R-HV
G-HV
B-HV
TO CRT PWB
HV-CONT.
TEST POINT
SCREEN
HEATER
H-DRIVE
HV-DRIVE
HV-REG
X-RAY
FBT-DC
STD-5V

10-10-1 SUB 1 WAVEFORMS

TP06



TP07



TP08



TP09



TP10



TP11



TP12



10-11 SUB 2

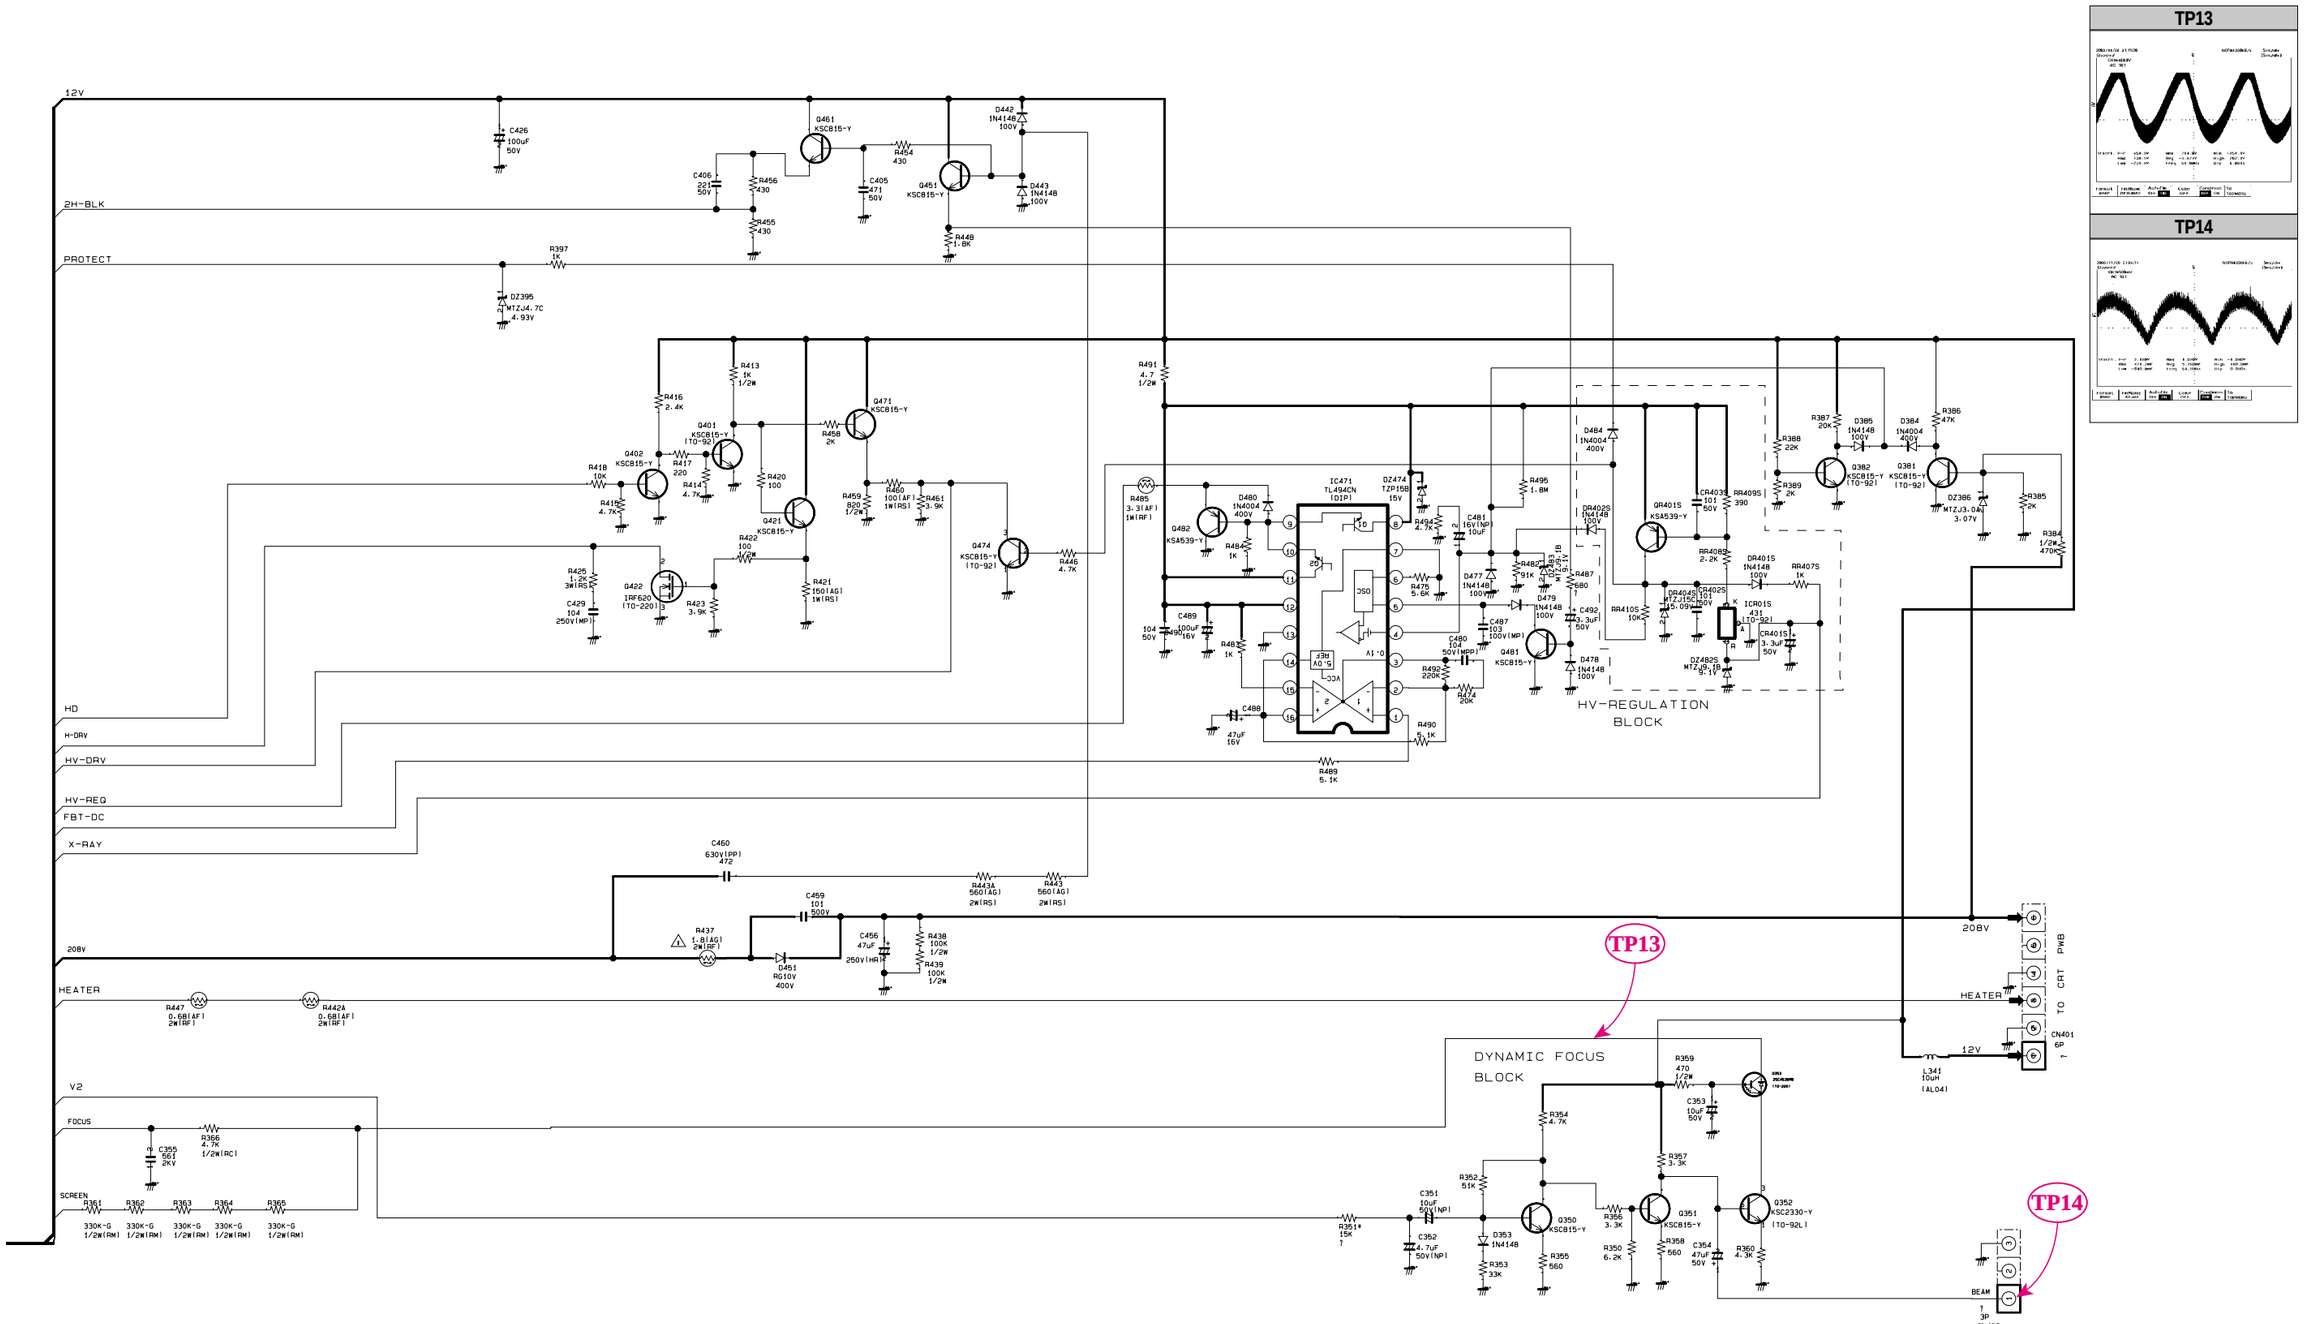
TP13
TP14
12V
2H-BLK
PROTECT
HD
H-DRV
HV-DRV
HV-REQ
FBT-DC
X-RAY
208V
HEATER
V2
FOCUS
SCREEN
HV-REGULATION BLOCK
DYNAMIC FOCUS BLOCK
TO CRT PWB
CN401 6P
CN403
BEAM
L341 10uH (AL04)
IC471 TL494CN (DIP)

10-12 SUB 3

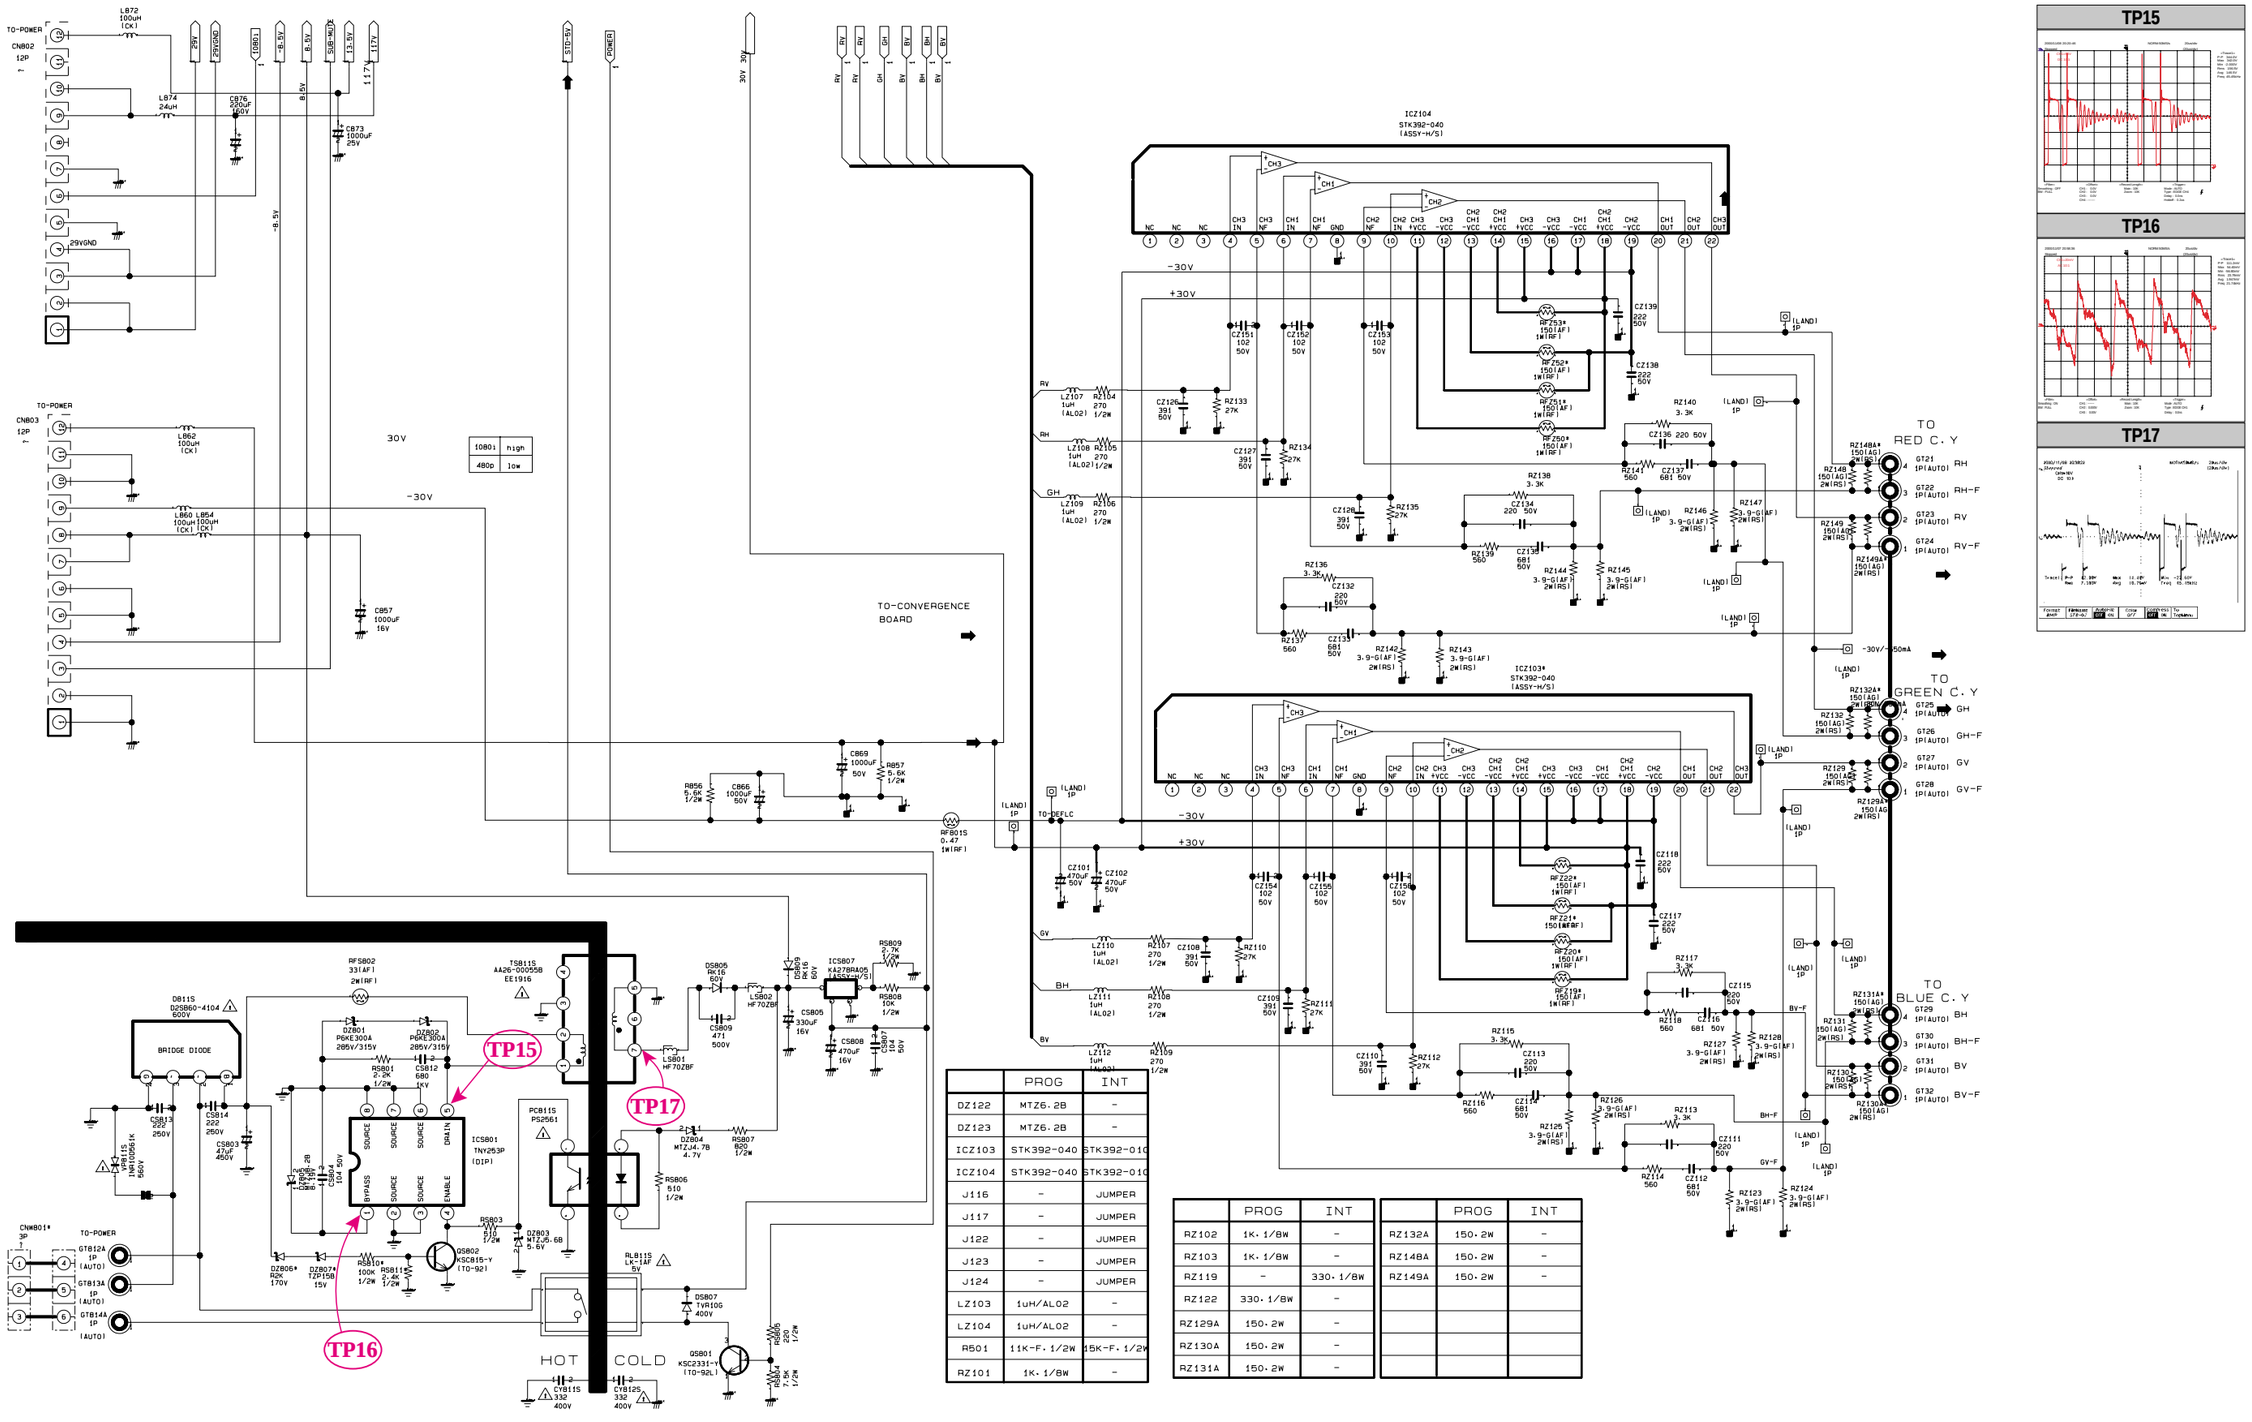

	PROG	INT
DZ122	MTZ6.2B	-
DZ123	MTZ6.2B	-
ICZ103	STK392-040	STK392-010
ICZ104	STK392-040	STK392-010
J116	-	JUMPER
J117	-	JUMPER
J122	-	JUMPER
J123	-	JUMPER
J124	-	JUMPER
LZ103	1uH/AL02	-
LZ104	1uH/AL02	-
RB01	11K-F.1/2W	15K-F.1/2W
RZ101	1K-1/8W	-

	PROG	INT
RZ102	1K-1/8W	-
RZ103	1K-1/8W	-
RZ119	-	330-1/8W
RZ122	330-1/8W	-
RZ129A	150.2W	-
RZ130A	150.2W	-
RZ131A	150.2W	-

	PROG	INT
RZ132A	150.2W	-
RZ148A	150.2W	-
RZ149A	150.2W	-

TP15

TP16

TP17

10-13 A/V TERMINAL

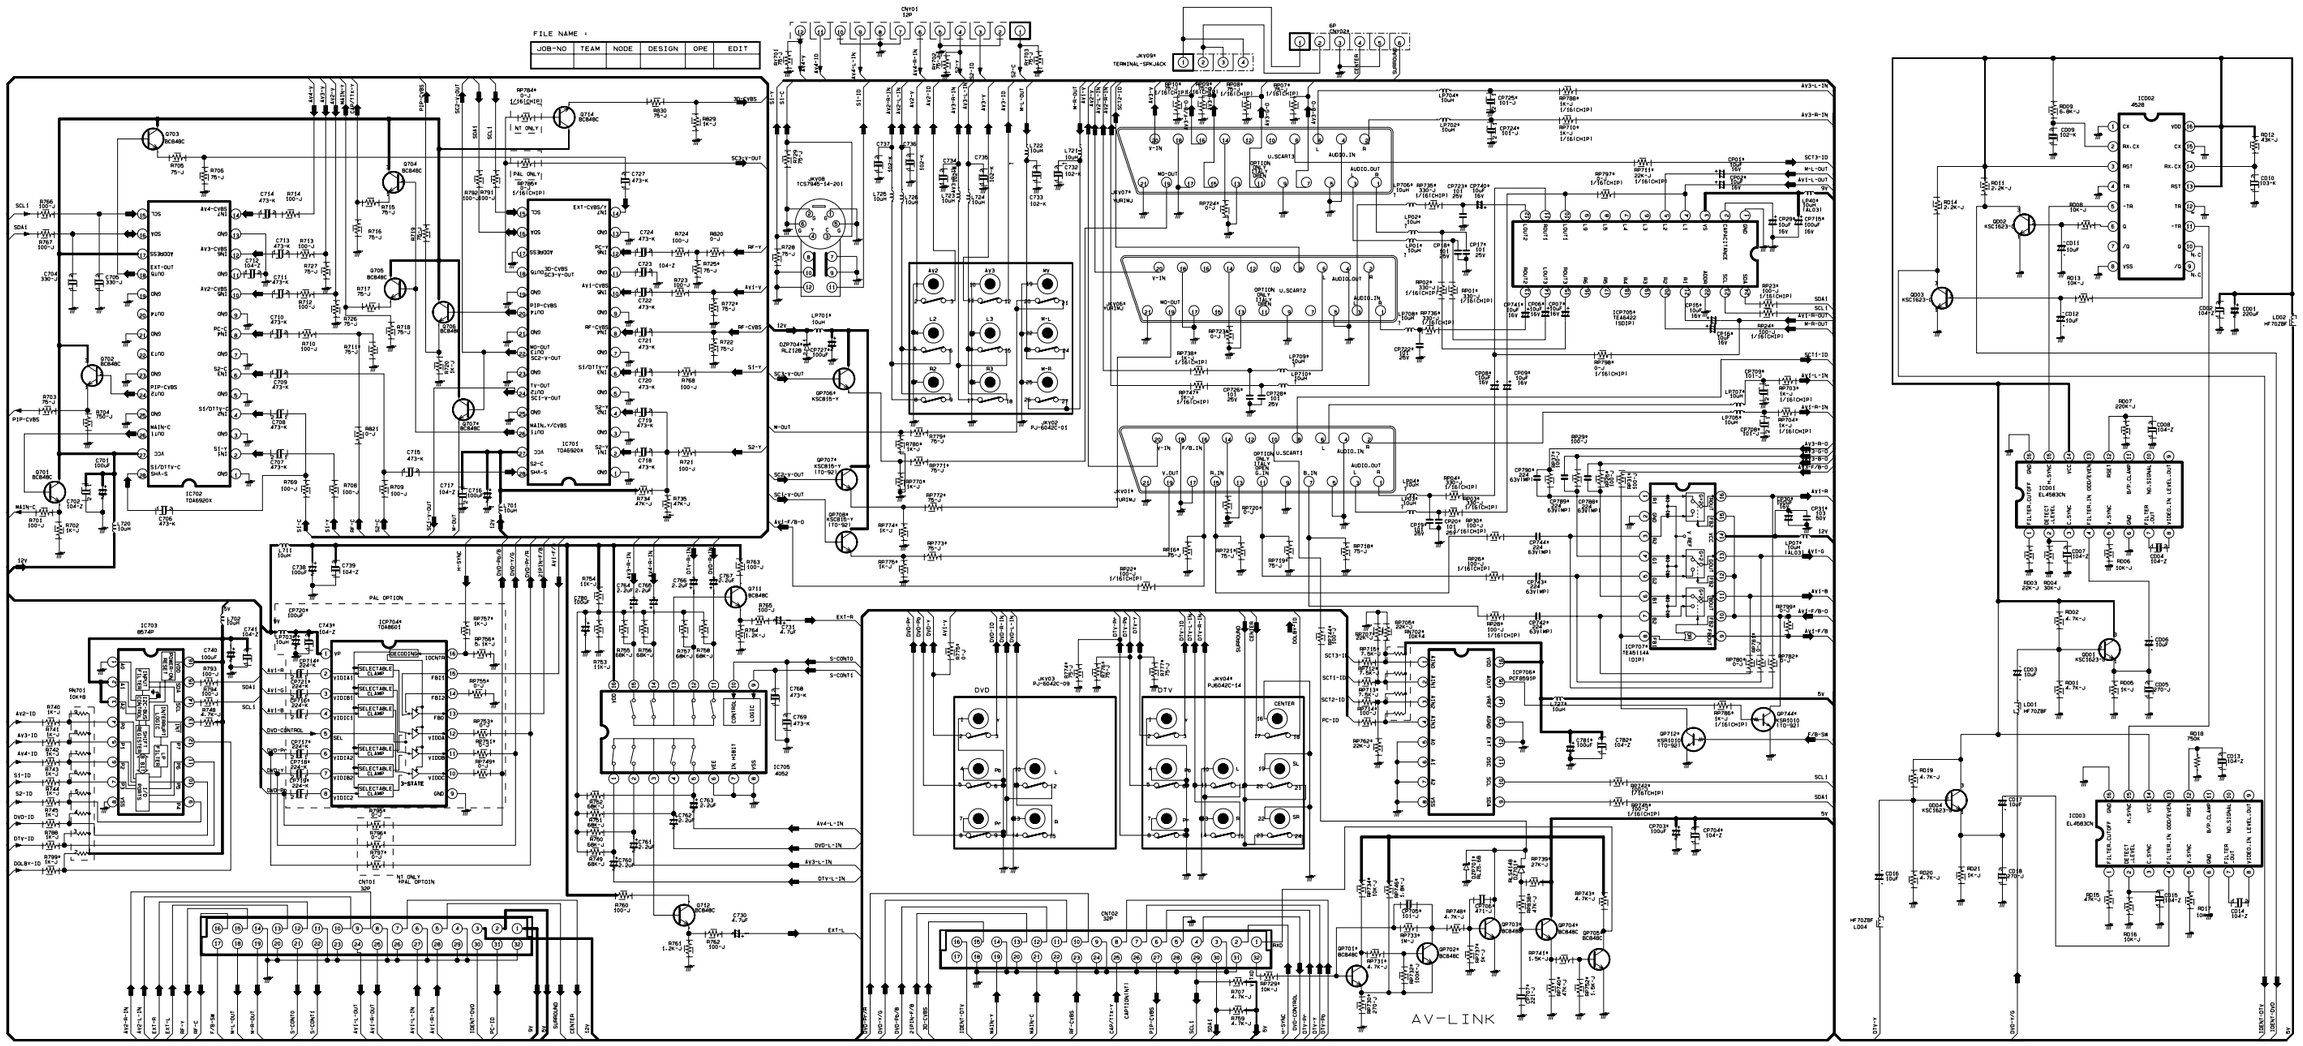

10-14 AV CONTROL

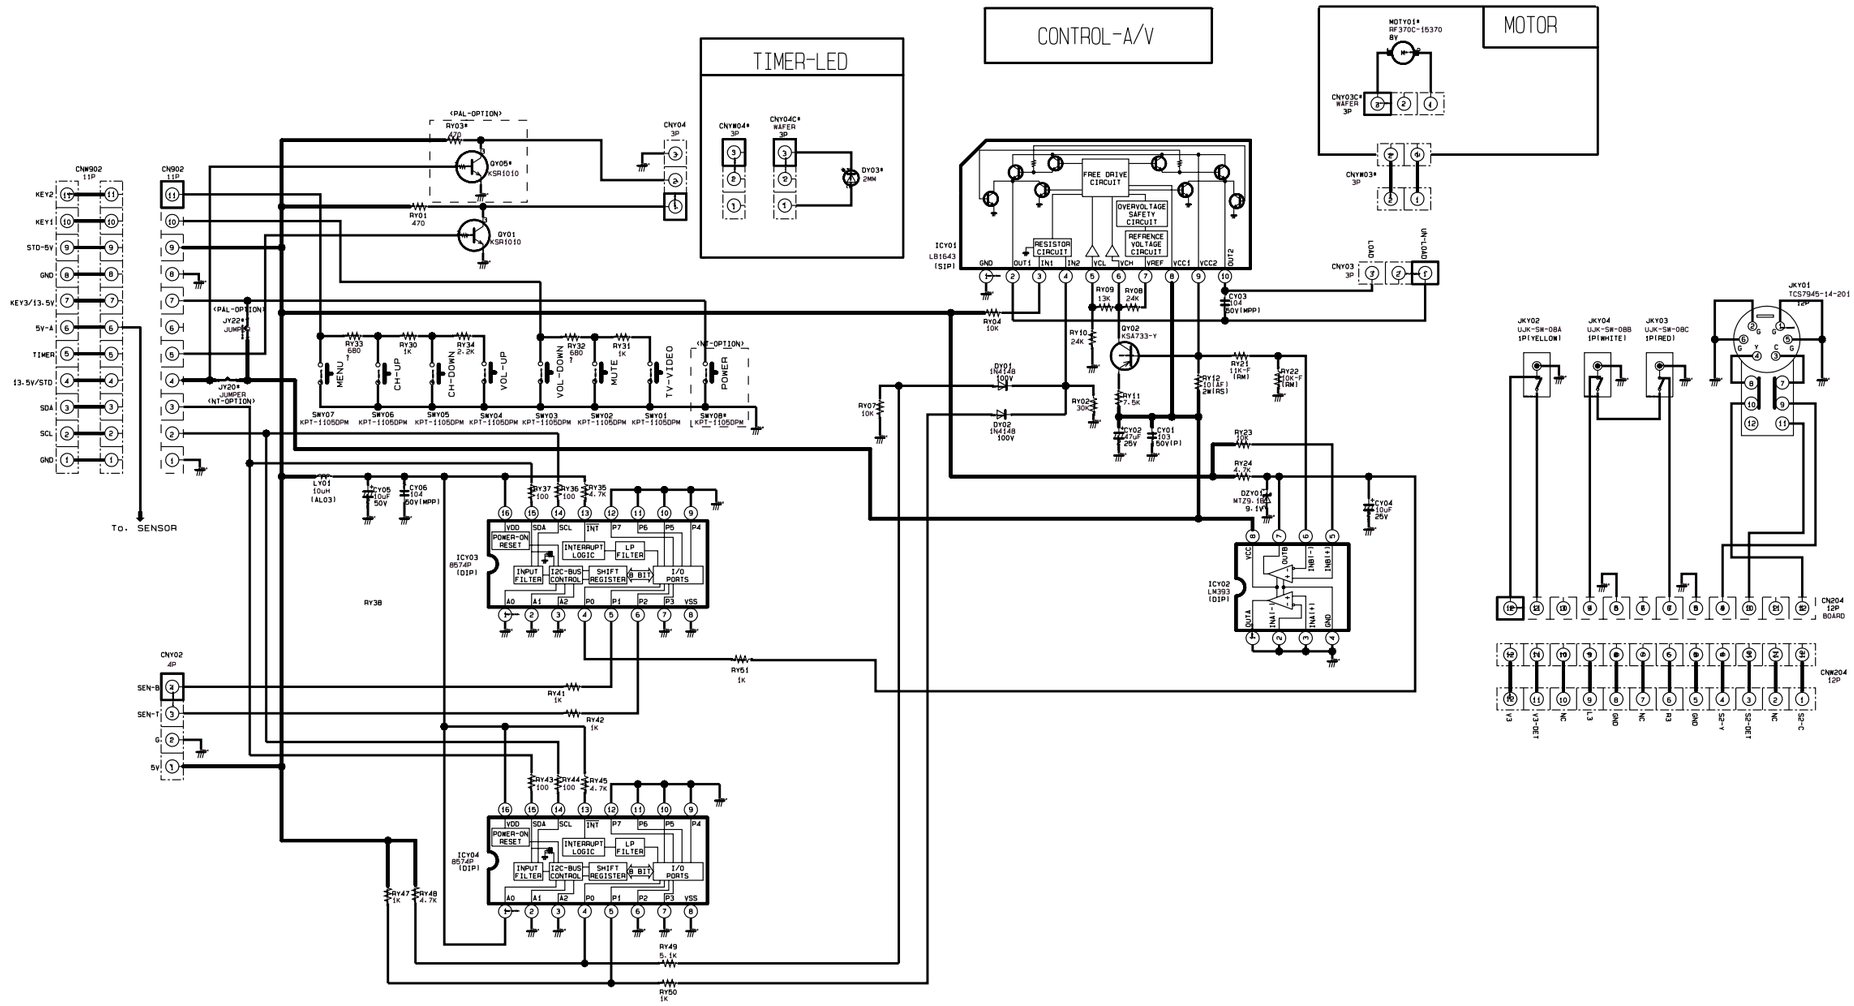

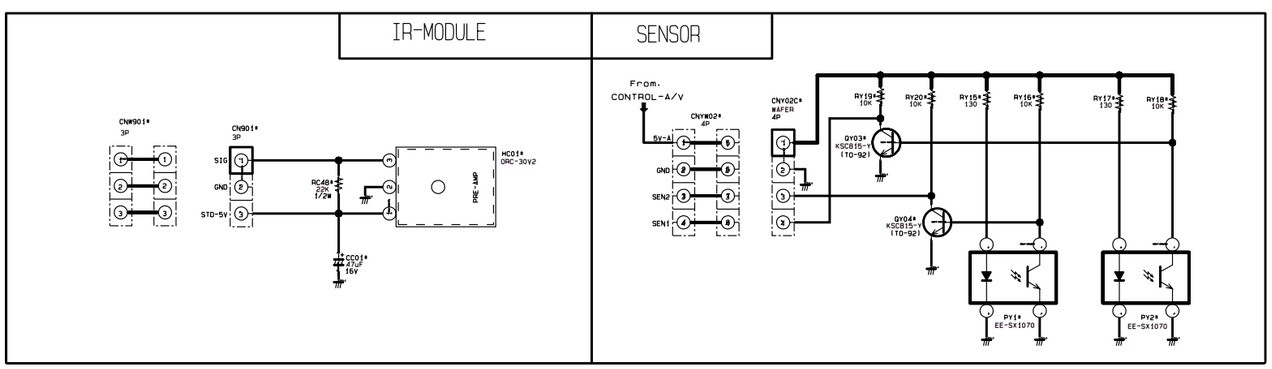

10-15 CONVERGENCE

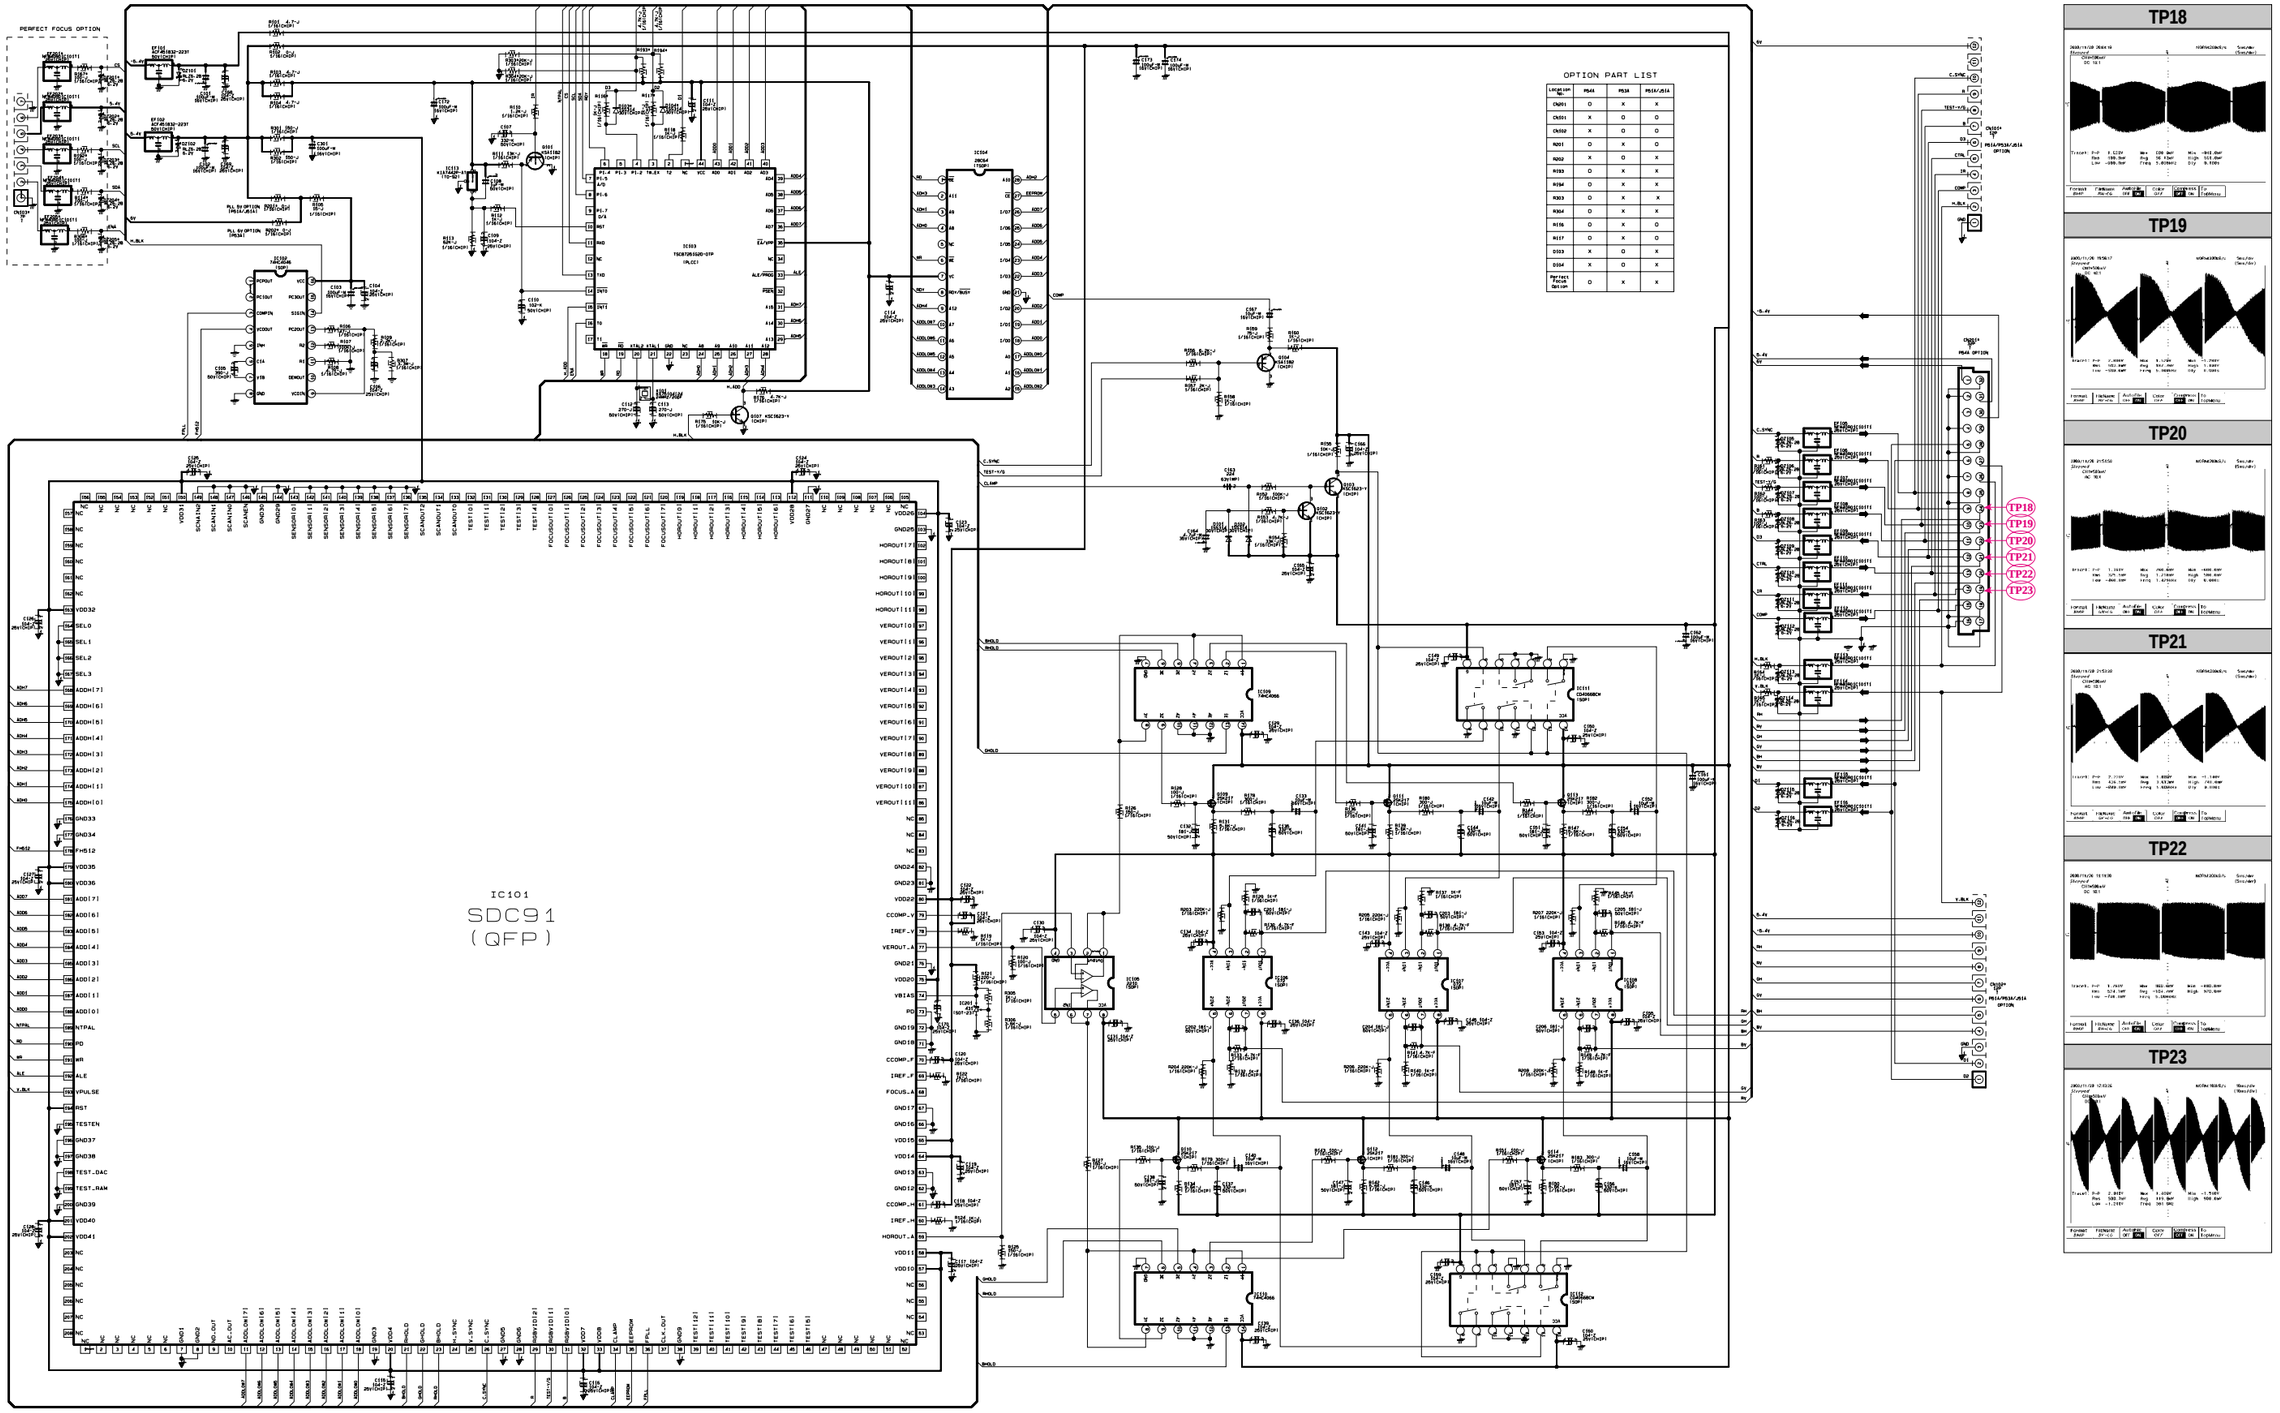

10-16 PERFECT FOCUS (PHOTO SENSOR & INTERFACE BOARD)

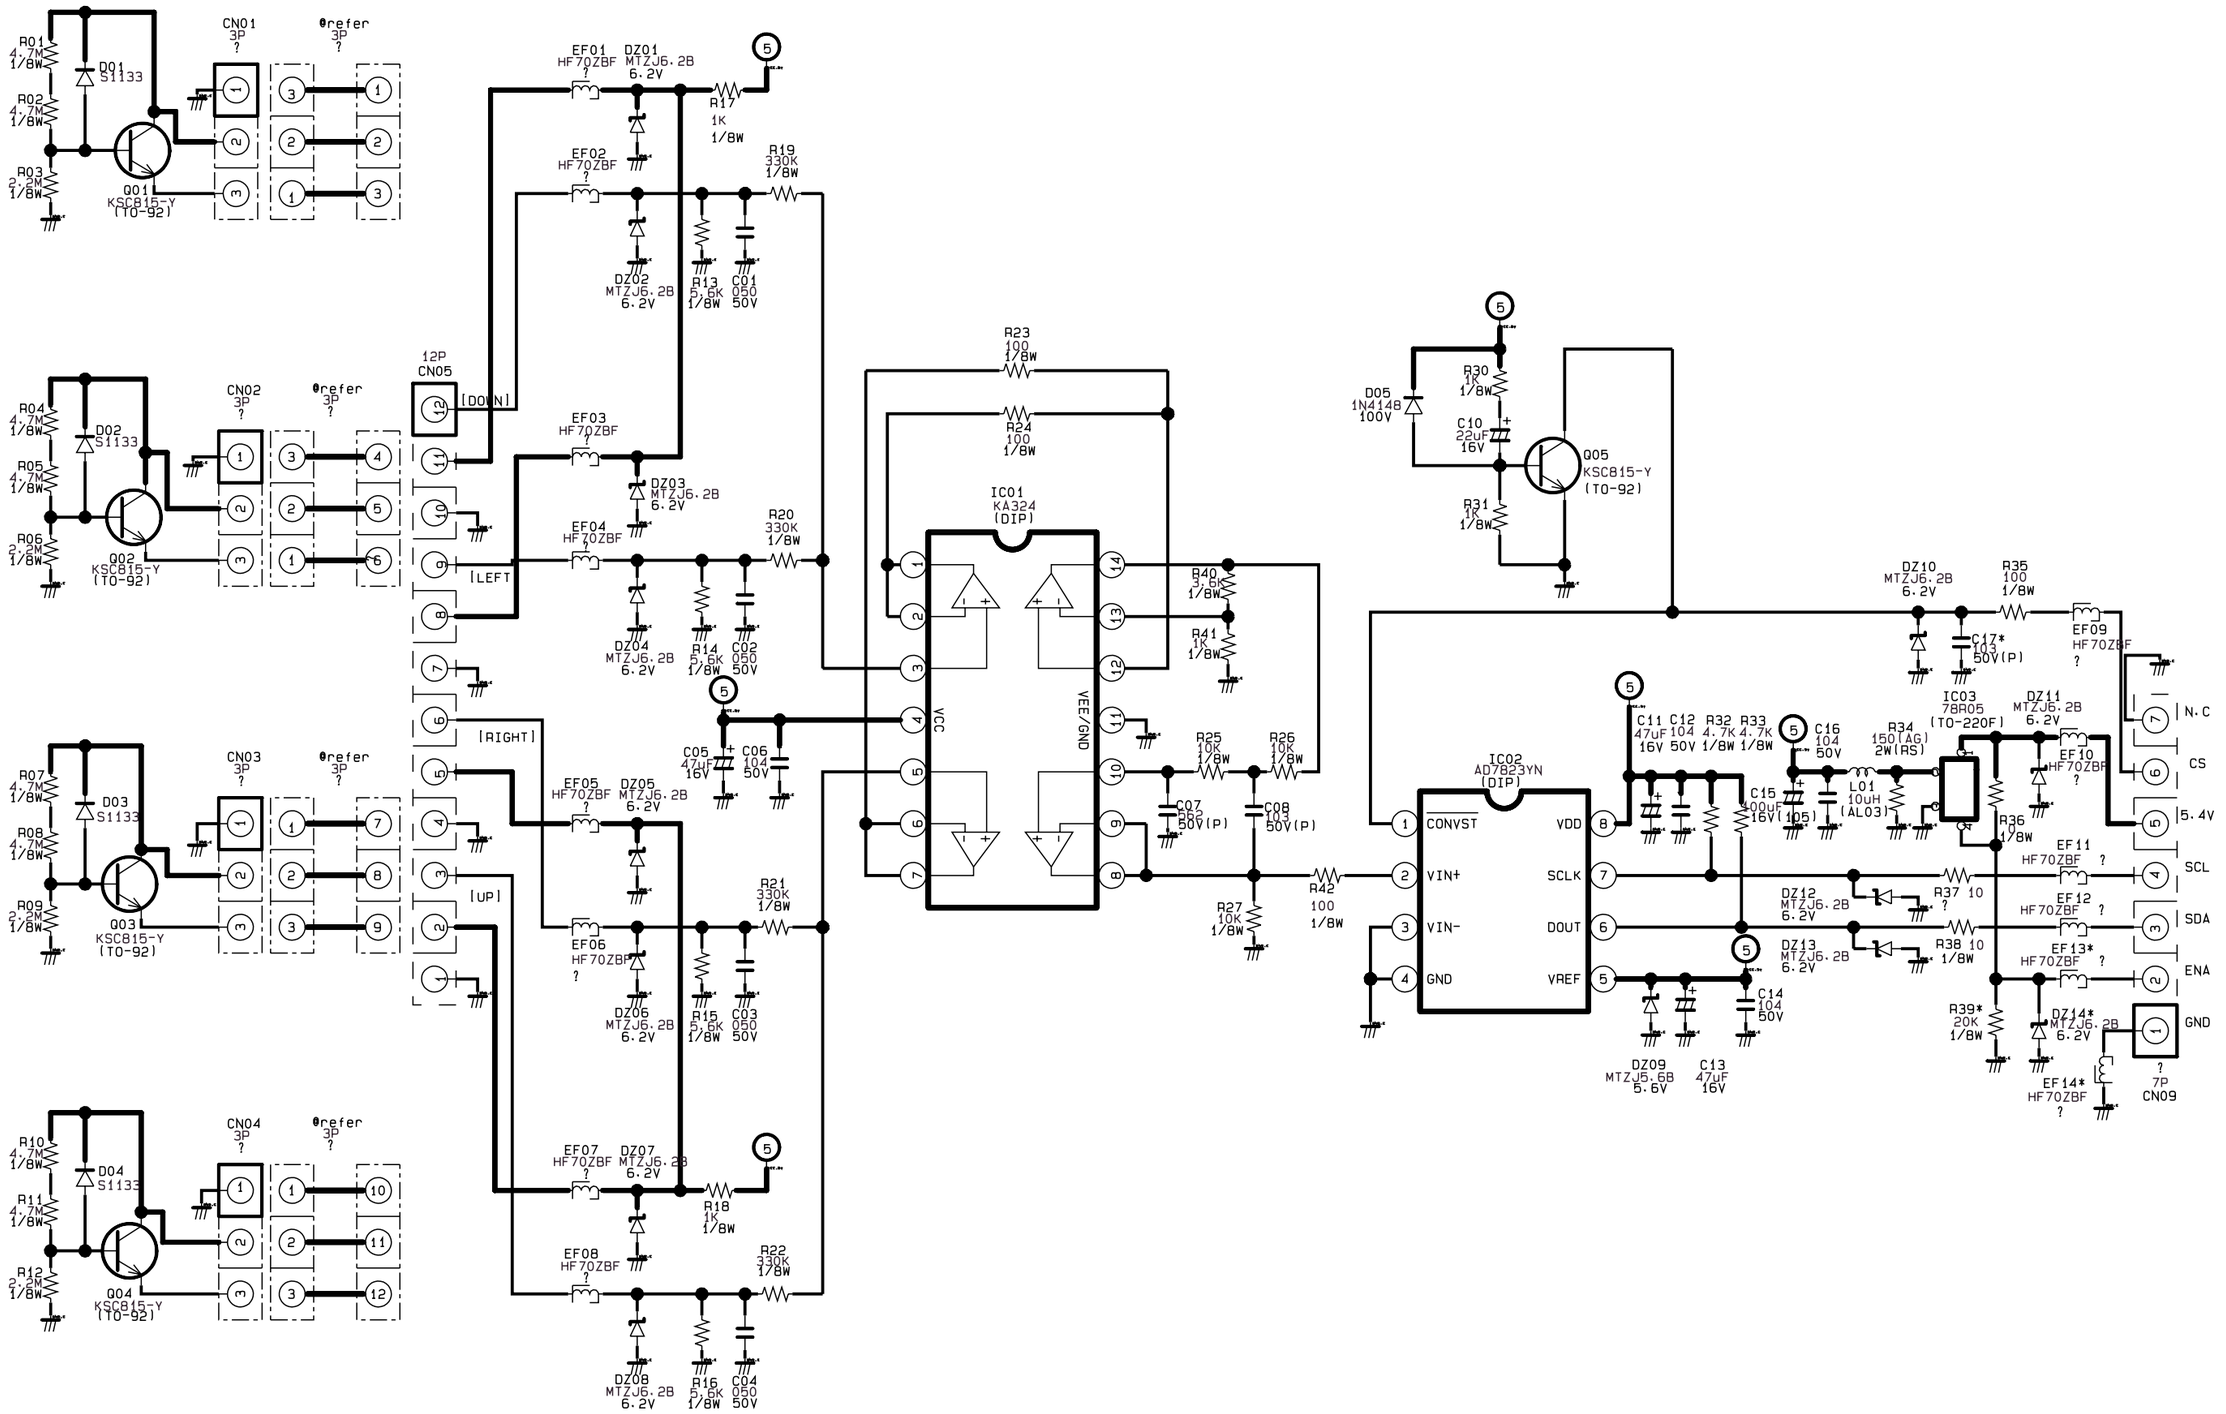

10-17 CAPTION

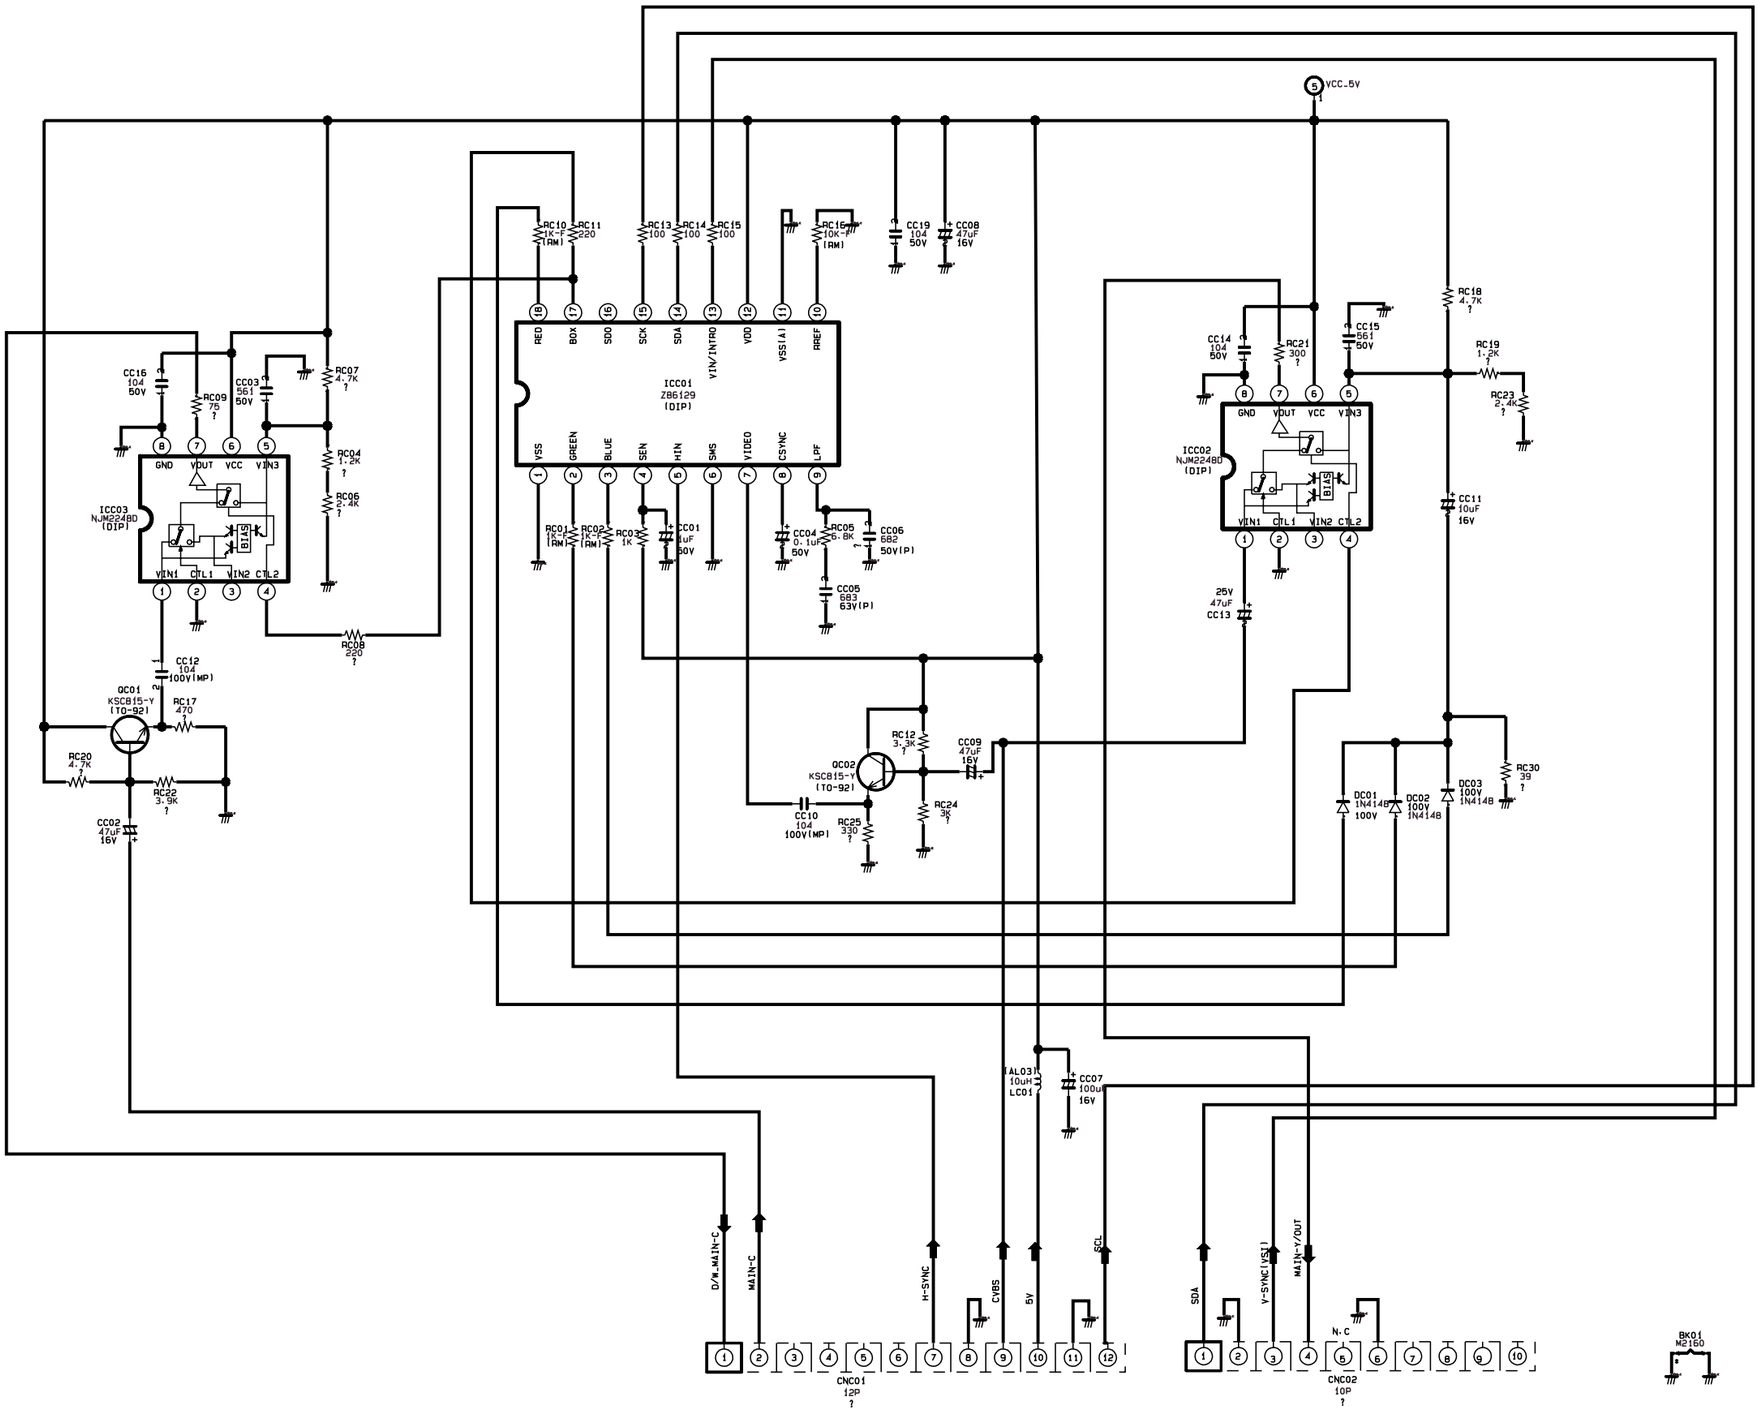

10-18 AV FROAN

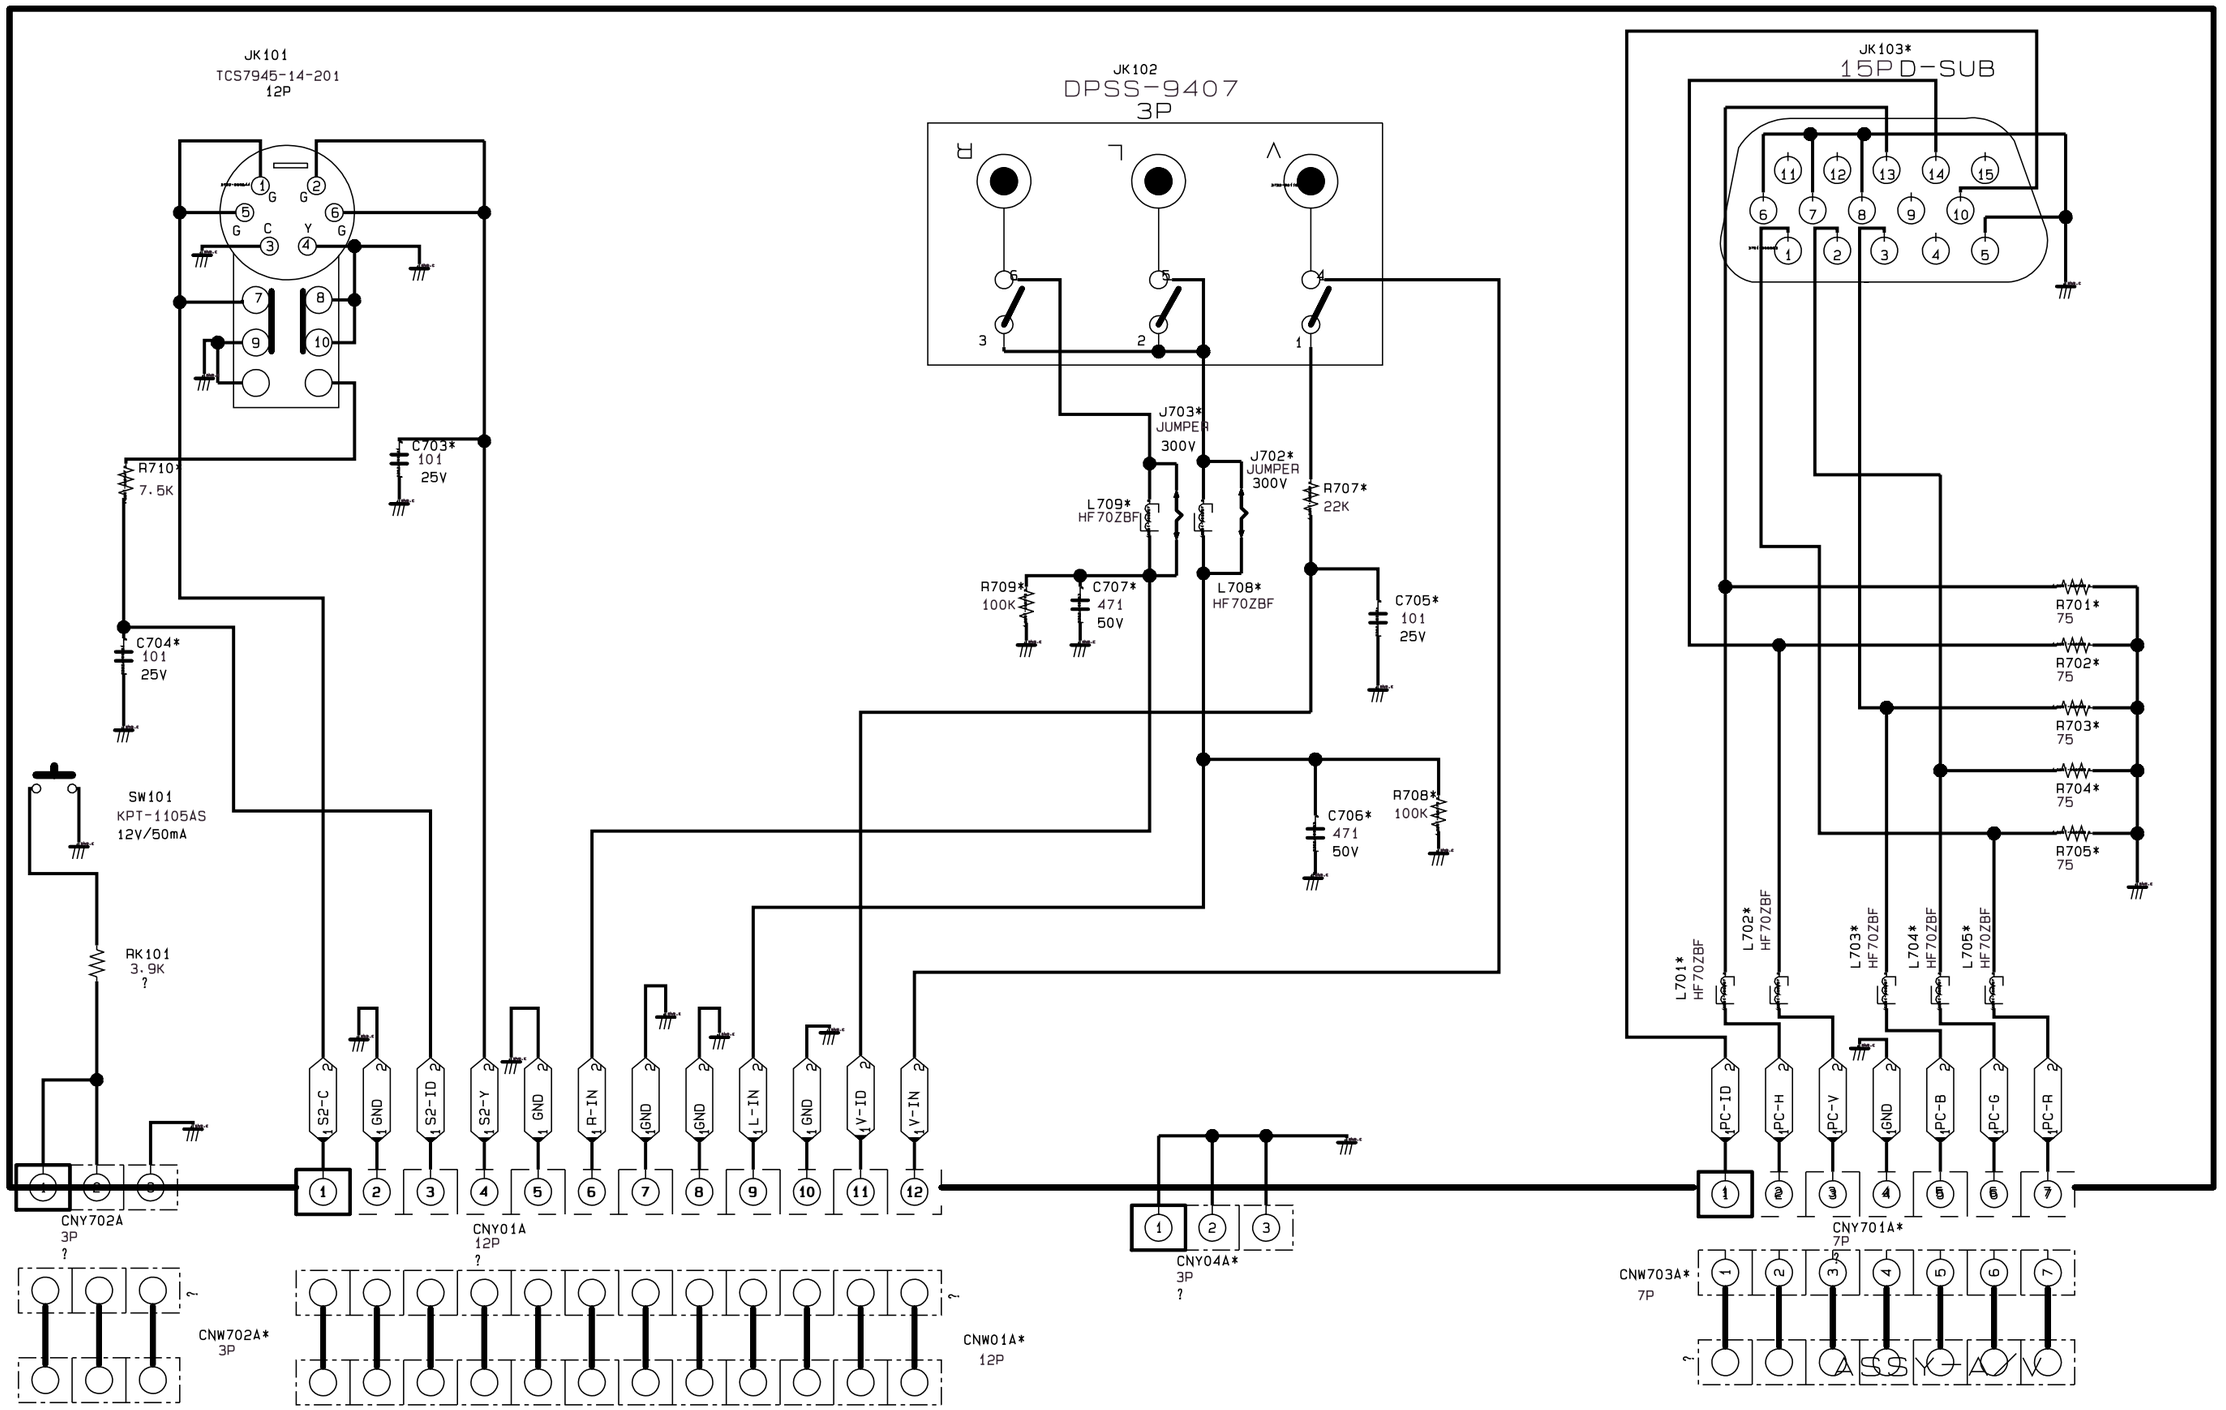

10-19 CONTROL, VM

CONTROL

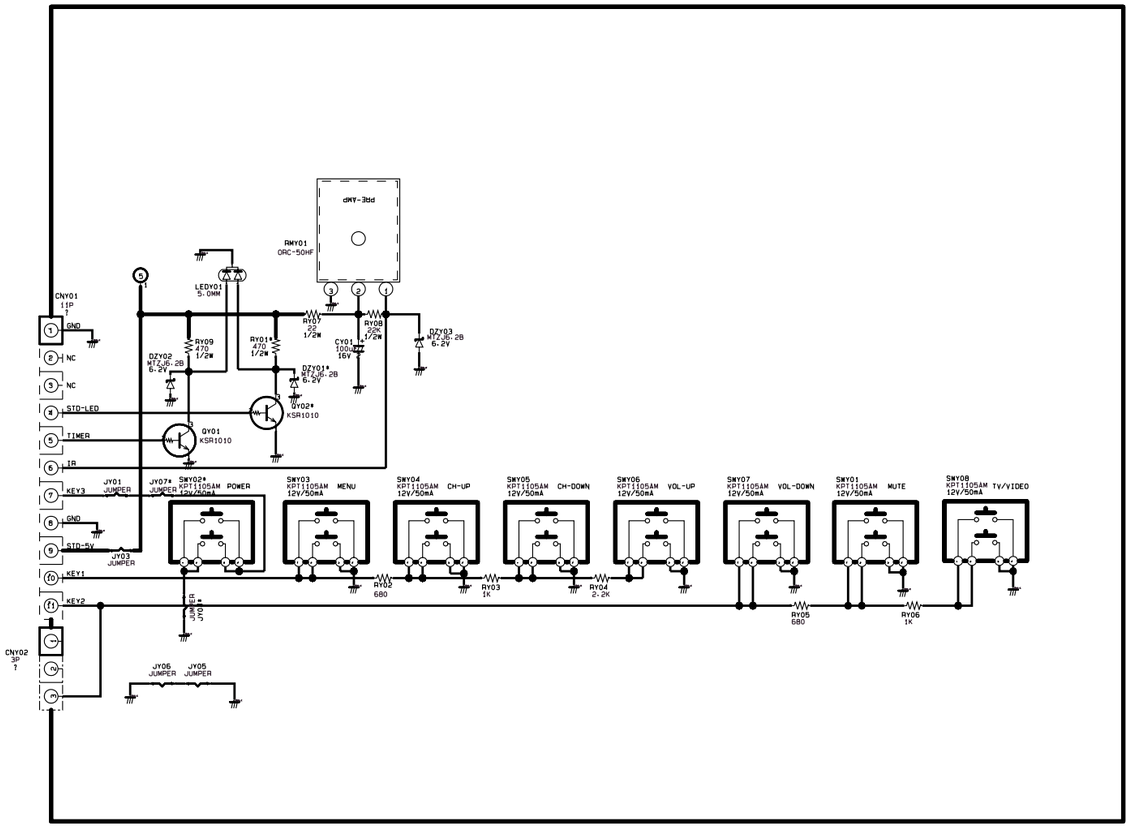

VM

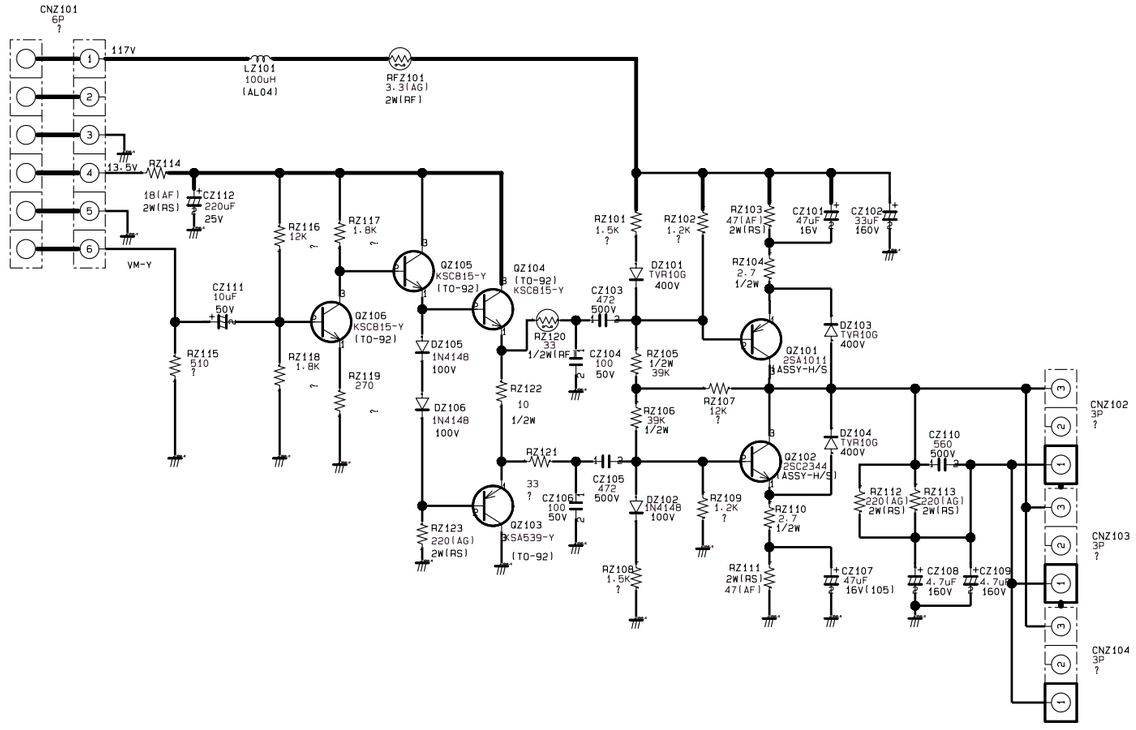

10-20 DW 1

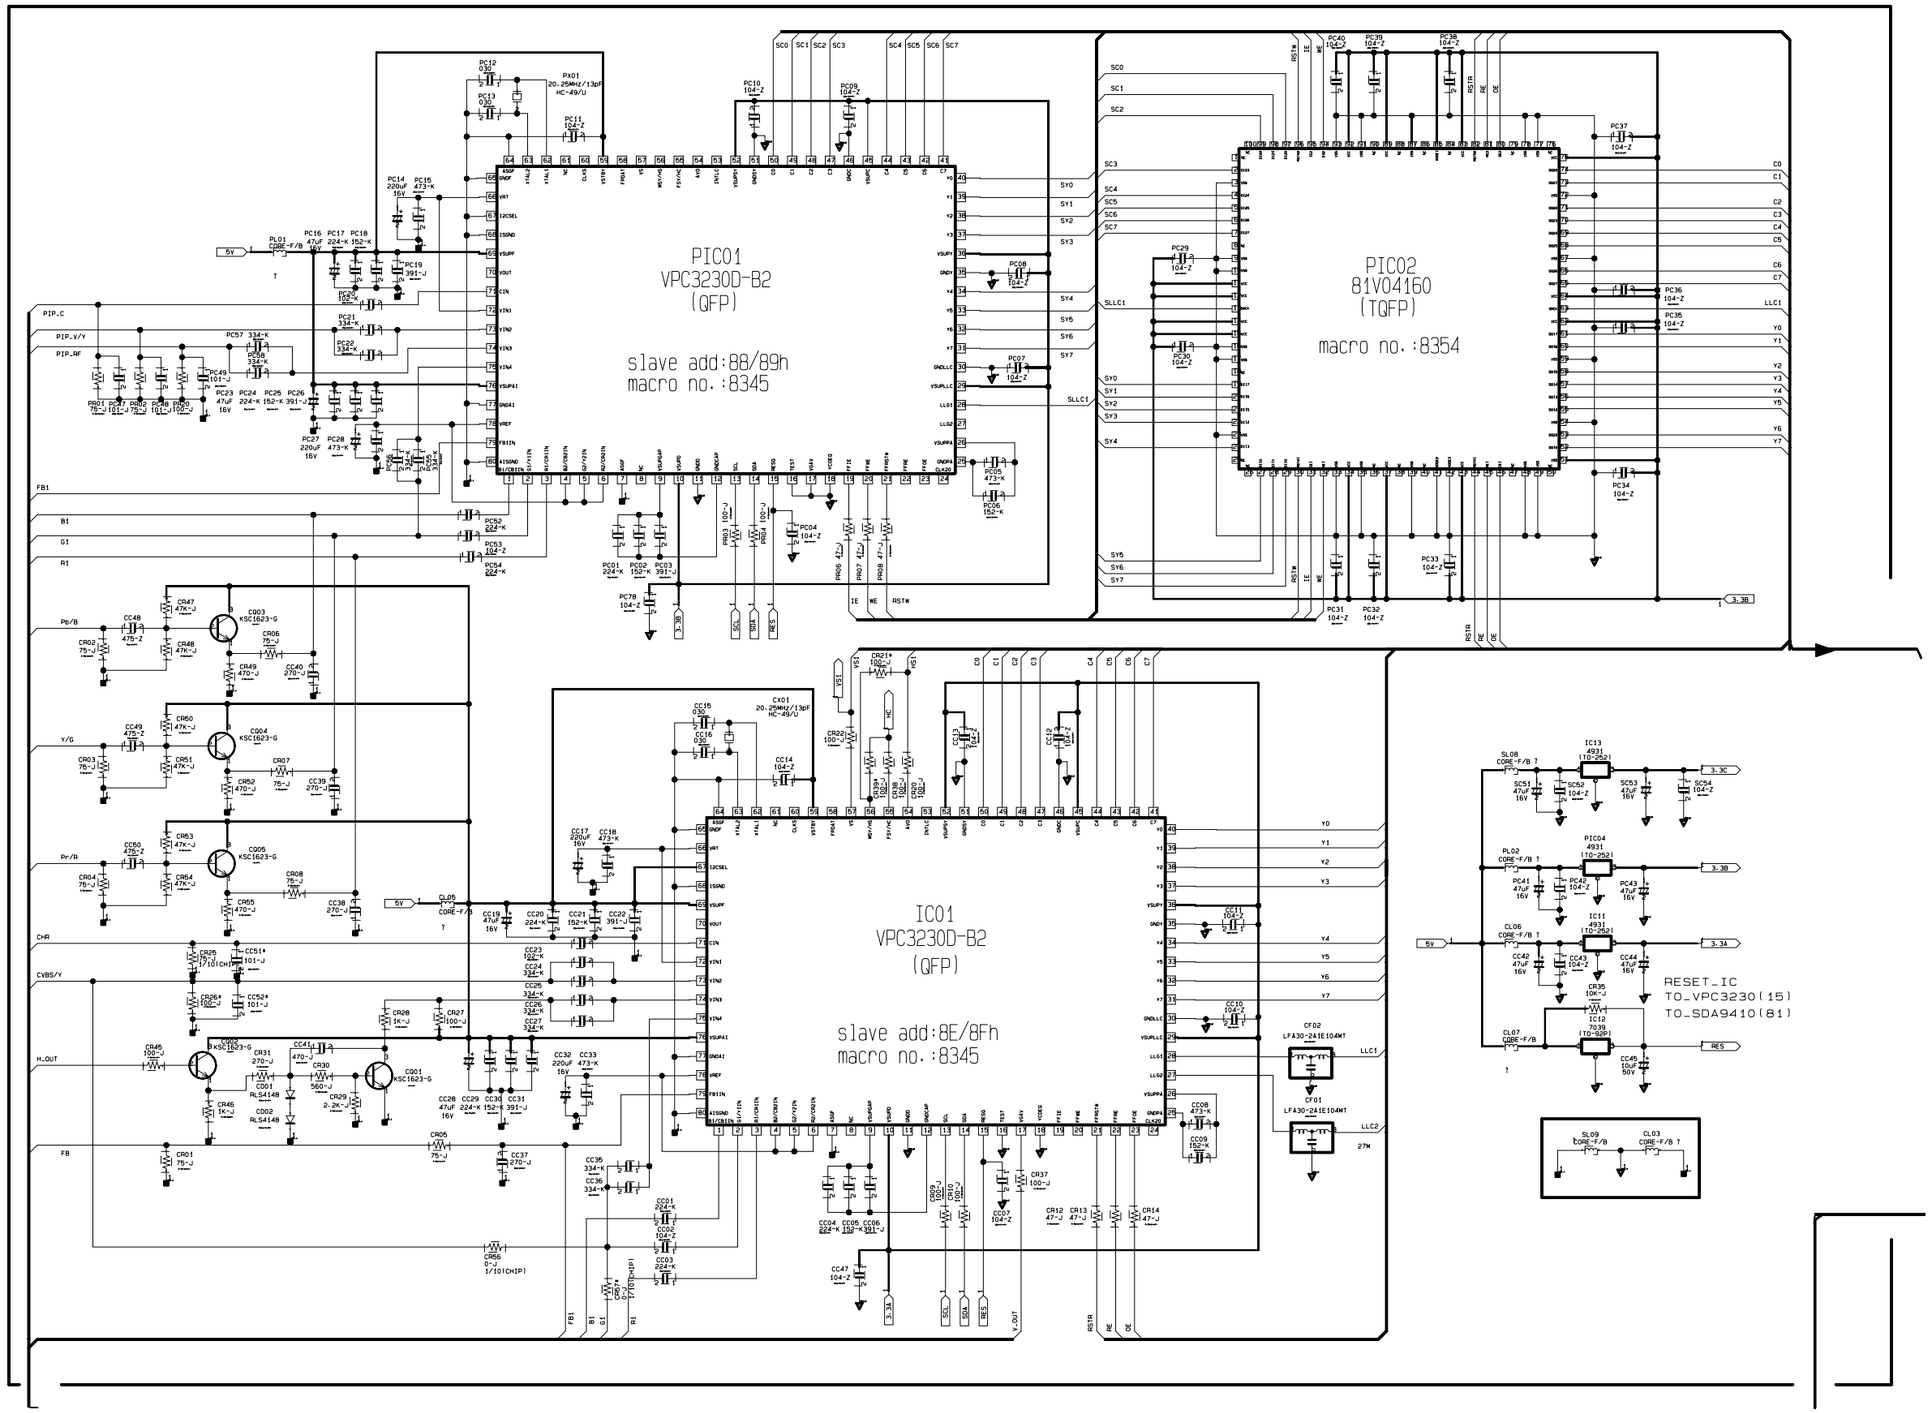
PIC01
VPC3230D-B2
(QFP)
slave add:88/89h
macro no.:8345
PIC02
81V04160
(TQFP)
macro no.:8354
IC01
VPC3230D-B2
(QFP)
slave add:8E/8Fh
macro no.:8345
RESET_IC
TO_VPC3230(15)
TO_SDA9410(81)

10-21 DW 2

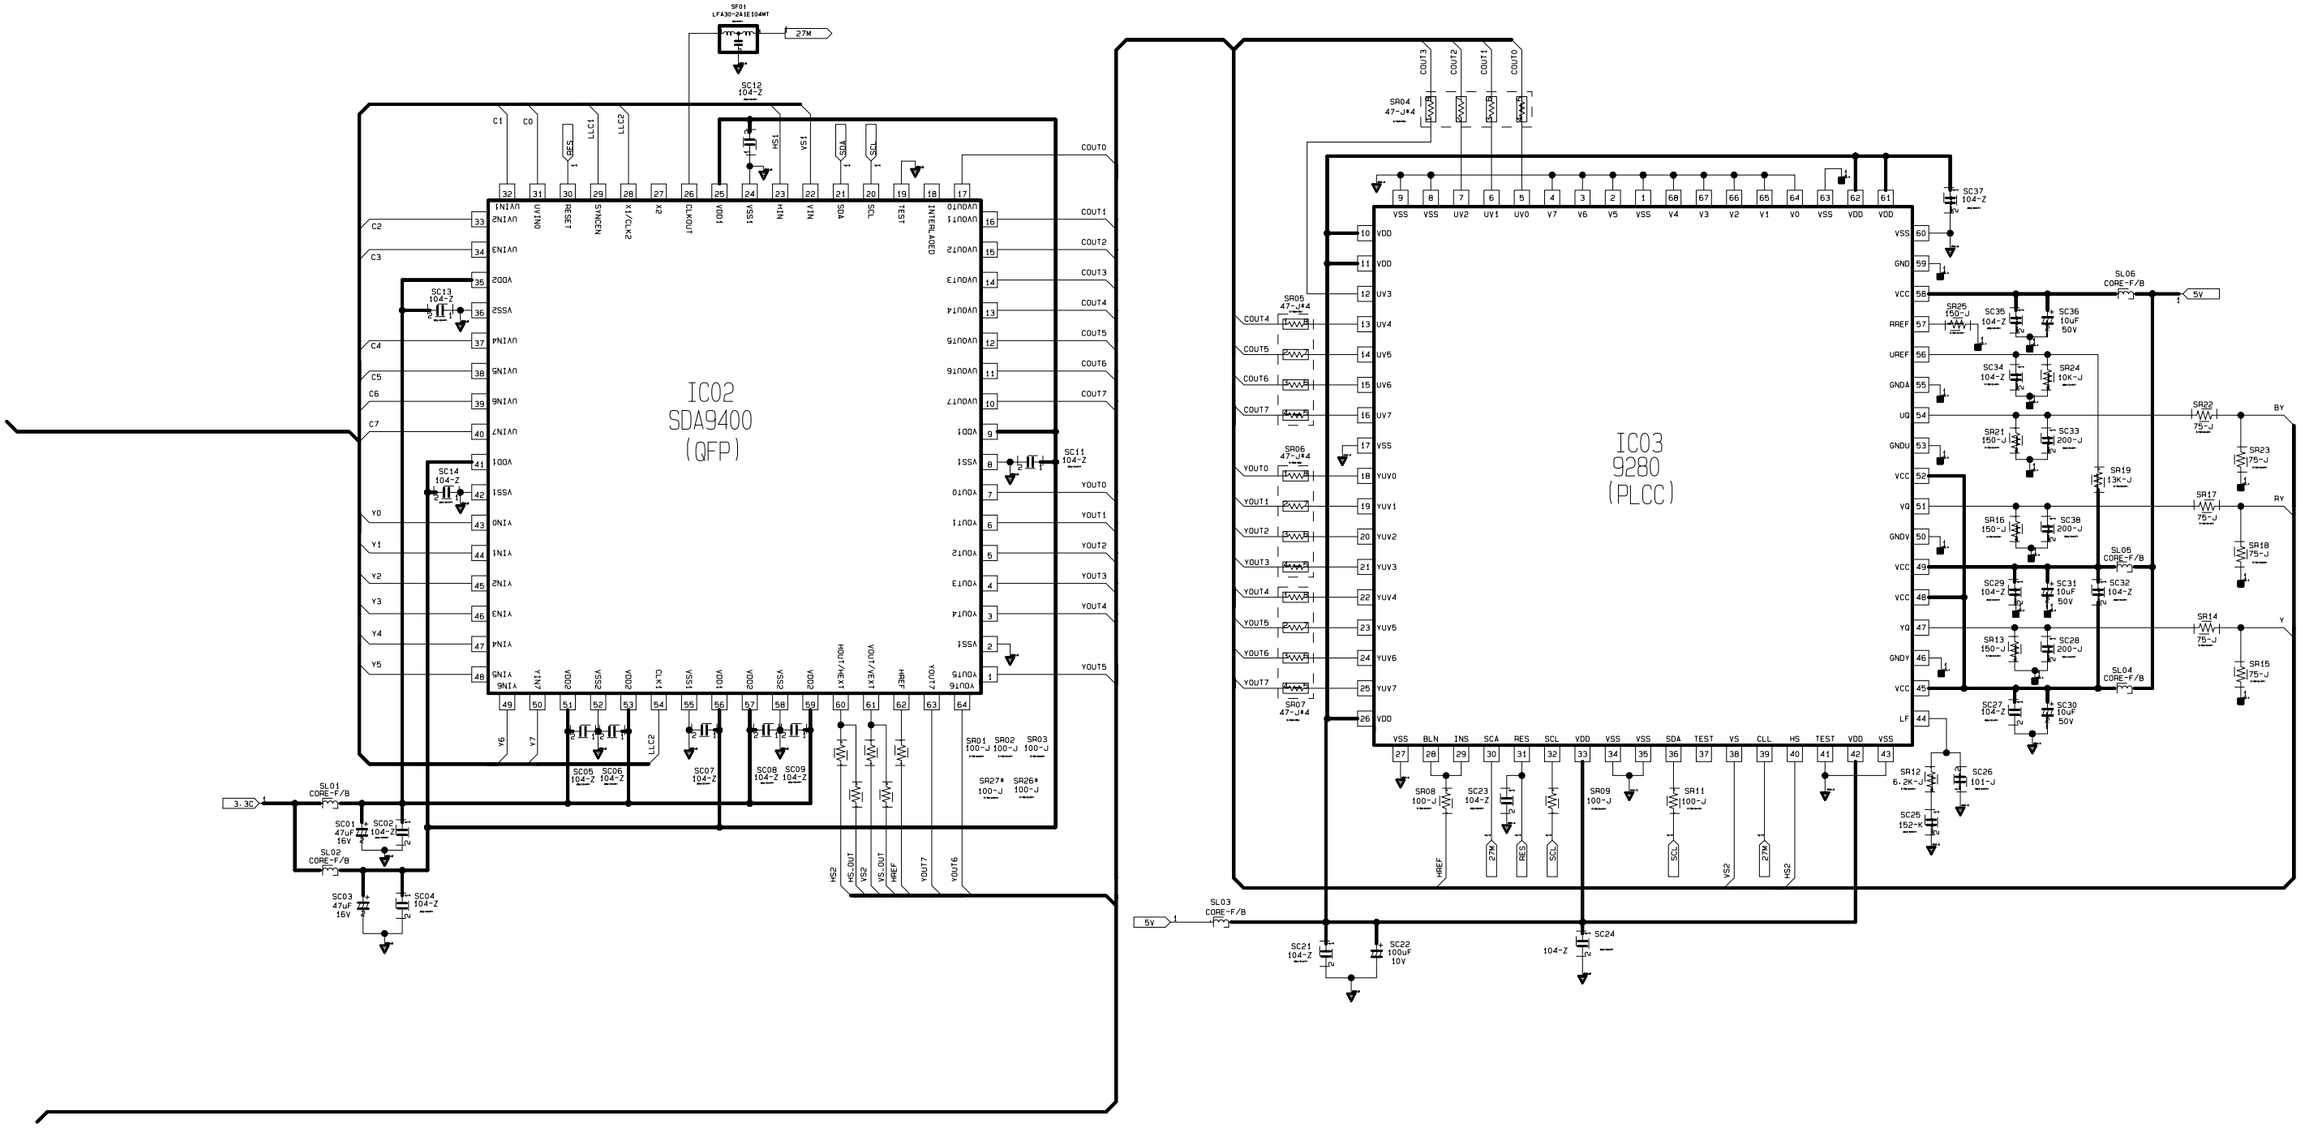
IC02
SDA9400
(QFP)
IC03
9280
(PLCC)
SF01
LFA30-241E104MT
27M
SC19
104-Z
SC13
104-Z
SC14
104-Z
SC11
104-Z
SL01
CORE-F/B
SL02
CORE-F/B
SC01
47uF
16V
SC02
104-Z
SC03
47uF
16V
SC04
104-Z
3.3C
SC05
104-Z
SC06
104-Z
SC07
104-Z
SC08
104-Z
SC09
104-Z
SR01
100-J
SR02
100-J
SR03
100-J
SR27*
100-J
SR26*
100-J
SR04
47-J*4
SR05
47-J*4
SR06
47-J*4
SR07
47-J*4
SR08
100-J
SR09
100-J
SR11
100-J
SR12
6.2K-J
SC23
104-Z
SC24
104-Z
SC21
104-Z
SC22
100uF
10V
SL03
CORE-F/B
5V
SL04
CORE-F/B
SL05
CORE-F/B
SL06
CORE-F/B
SC25
152-K
SC26
101-J
SC27
104-Z
SC28
200-J
SC29
104-Z
SC30
10uF
50V
SC31
10uF
50V
SC32
104-Z
SC33
200-J
SC34
104-Z
SC35
104-Z
SC36
10uF
50V
SC37
104-Z
SC38
200-J
SR10
150-J
SR13
150-J
SR16
150-J
SR21
150-J
SR25
150-J
SR24
10K-J
SR19
13K-J
SR22
75-J
SR23
75-J
SR17
75-J
SR18
75-J
SR14
75-J
SR15
75-J
SR20
75-J
COUT0
COUT1
COUT2
COUT3
COUT4
COUT5
COUT6
COUT7
YOUT0
YOUT1
YOUT2
YOUT3
YOUT4
YOUT5
YOUT6
YOUT7
HS2
HS_OUT
VS2
VS_OUT
HREF
SCL
RES
2KN

10-22 DW 3

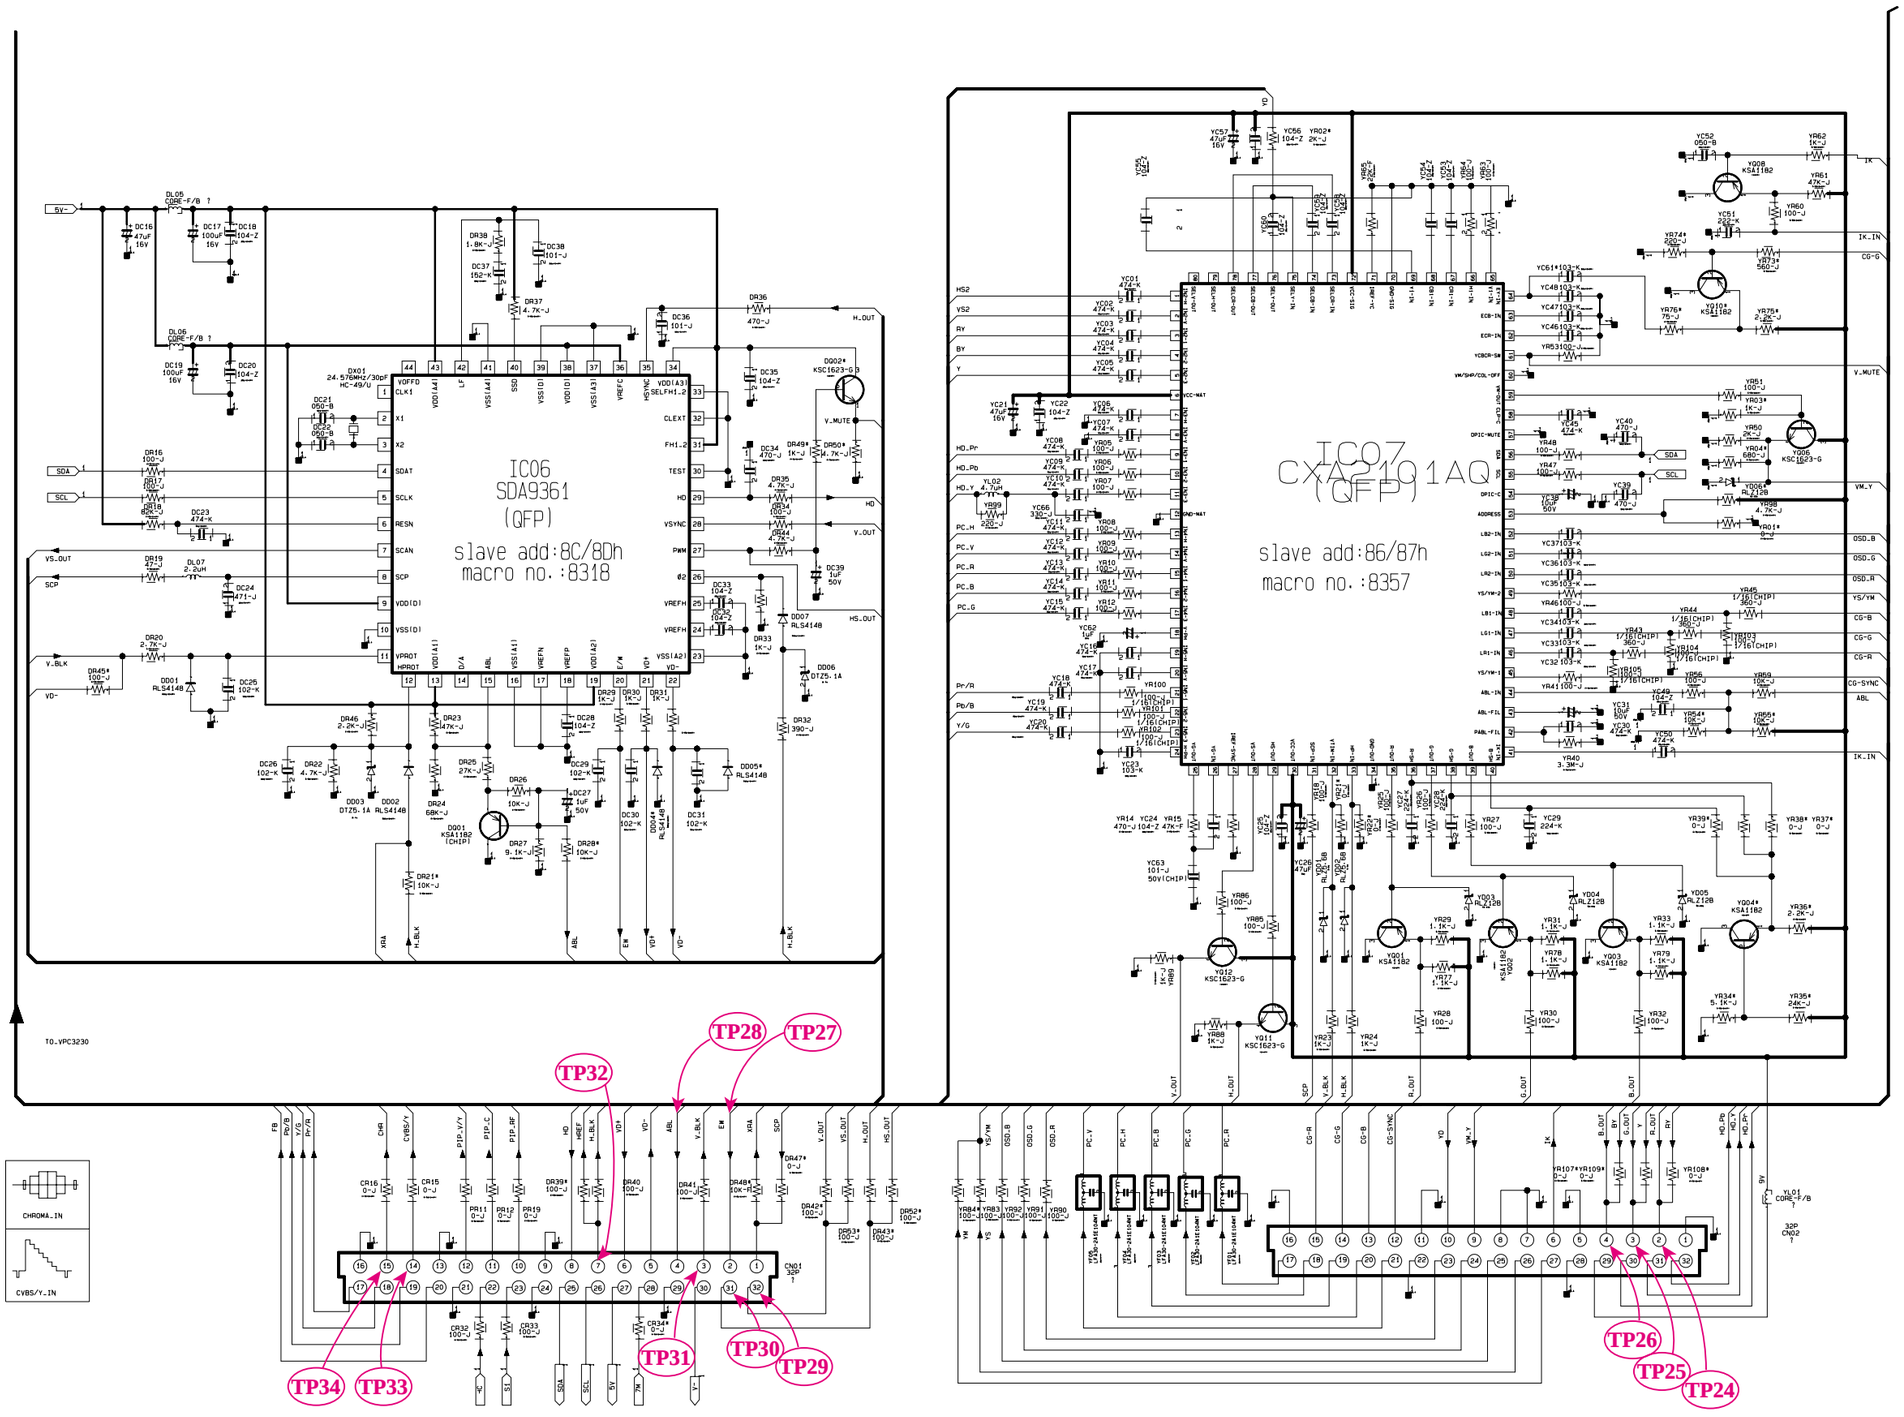
IC06
SDA9361
(QFP)
slave add:8C/8Dh
macro no.:8318
IC07
CXA2101AQ
(QFP)
slave add:86/87h
macro no.:8357
TO_VPC3230
CHROMA_IN
CVBS/Y_IN
TP28
TP27
TP32
TP34
TP33
TP31
TP30
TP29
TP26
TP25
TP24

10-22-1 DW 3 WAVEFORMS

TP24



TP25



TP26



TP27



TP28



TP29



TP30



TP31



TP32



TP33



TP34